



PRODUCT CATALOG

BUILT TO ENDURE

SYNONYMOUS WITH FIREFIGHTING SINCE 1886



Waterous



In 1886, a private development company offered the Waterous brothers free land in South St. Paul, Minnesota, U.S.A. to build a new factory along the Mississippi River.

A RICH HISTORY IN FIRE SUPPRESSION TECHNOLOGY.

Since our humble beginnings in 1886, Waterous has remained committed to developing products that meet the demands of our fellow firefighters. Our dedication has made Waterous one of the most trusted designers and manufacturers of fire pumps and waterworks equipment worldwide. From creating the first-frost shield hydrant and steam-powered, horse-drawn fire pump, to creating today's most advanced CAFS, Waterous sets the global standard when it comes to quality, development and performance.

THE THREAT OF FIRE KNOWS NO BOUNDARIES.

From the dry bush of the Australian outback to the damp coastal communities of England, fire is an international threat. To combat the flames wherever they arise, Waterous maintains a global presence with products specified to the needs of the global firefighting industry with unmatched service and customer care. For over 130 years, departments and brigades worldwide have confronted fire with Waterous by their side. Our full line of field-proven, technologically advanced fire suppression tools gives them the advantage.




After over 130 years of expansion, and – ironically – two tragic fires that burned the factory to the ground – Waterous still resides today at the South St. Paul location along the Mississippi where the Waterous brothers built their first factory.

THE WORLD'S MOST TECHNICALLY ADVANCED FIRE PUMPS.

Fire hasn't changed - but the methods for fighting it have. At Waterous, we not only embrace this change, we propel it. We push the limits to improve the effectiveness of firefighting equipment. Whether that's delivering more knockdown power from a fire pump, or leading the charge in CAFS development and deployment, Waterous provides the firefighting industry with revolutionary tools that meet the demands of a hero, and maintains a global presence with products specified to each region's firefighting needs in Europe, North and South America, the Middle East, Asia, Australia, New Zealand and Africa.



TABLE OF CONTENTS

<table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">SPLIT-SHAFT PUMPS</td> <td style="text-align: right; padding: 2px;">PAGE 5</td> </tr> <tr> <td style="padding: 2px;">CSC22</td> <td style="padding: 2px;">ESU1C22</td> <td></td> </tr> <tr> <td style="padding: 2px;">CSUC22</td> <td style="padding: 2px;">CXC22</td> <td></td> </tr> <tr> <td style="padding: 2px;">CMC22</td> <td style="padding: 2px;">CXSC22</td> <td></td> </tr> <tr> <td style="padding: 2px;">CMUC22</td> <td></td> <td></td> </tr> </table> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">PTO-DRIVEN PUMPS</td> <td style="text-align: right; padding: 2px;">PAGE 8</td> </tr> <tr> <td style="padding: 2px;">CPK-2</td> <td style="padding: 2px;">CLK</td> <td style="padding: 2px;">CMK</td> </tr> <tr> <td style="padding: 2px;">CPK-3</td> <td style="padding: 2px;">CLPA</td> <td style="padding: 2px;">CMPA</td> </tr> <tr> <td style="padding: 2px;">CPK-4</td> <td style="padding: 2px;">CSK</td> <td style="padding: 2px;">CMUK</td> </tr> <tr> <td style="padding: 2px;">CGK</td> <td style="padding: 2px;">CSPA</td> <td style="padding: 2px;">CMUPA</td> </tr> <tr> <td style="padding: 2px;">CGPA</td> <td style="padding: 2px;">CSUK</td> <td style="padding: 2px;">HLUK</td> </tr> <tr> <td style="padding: 2px;">CXK</td> <td style="padding: 2px;">CSUPA</td> <td style="padding: 2px;">HLUPA</td> </tr> <tr> <td style="padding: 2px;">CXPA</td> <td></td> <td></td> </tr> </table> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">INTERNATIONAL REAR-MOUNT PUMPS</td> <td style="text-align: right; padding: 2px;">PAGE 13</td> </tr> <tr> <td style="padding: 2px;">HL400</td> <td style="padding: 2px;">HL200</td> <td></td> </tr> <tr> <td style="padding: 2px;">HL300</td> <td style="padding: 2px;">PASSPORT S200</td> <td></td> </tr> </table> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">DIRECT-ENGINE MOUNTED PUMPS</td> <td style="text-align: right; padding: 2px;">PAGE 15</td> </tr> <tr> <td style="padding: 2px;">CPT-2</td> <td style="padding: 2px;">CGT</td> <td></td> </tr> <tr> <td style="padding: 2px;">CPT-3</td> <td style="padding: 2px;">CXT</td> <td></td> </tr> <tr> <td style="padding: 2px;">CPT-4</td> <td style="padding: 2px;">CLT</td> <td></td> </tr> </table> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">REAR-MOUNT</td> <td style="text-align: right; padding: 2px;">PAGE 17</td> </tr> <tr> <td style="padding: 2px;">CMD</td> <td style="padding: 2px;">CSUD</td> <td></td> </tr> <tr> <td style="padding: 2px;">CMUD</td> <td style="padding: 2px;">HLUD</td> <td></td> </tr> <tr> <td style="padding: 2px;">CSD</td> <td style="padding: 2px;">ESU1</td> <td></td> </tr> </table> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">ECLIPSE™ CAFSYSTEMS</td> <td style="text-align: right; padding: 2px;">PAGE 19</td> </tr> <tr> <td colspan="2" style="padding: 2px;">ECLIPSE™</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">ECLIPSE™ ES</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">ECLIPSE™ GEN 2.0</td> <td></td> </tr> </table> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">PORTABLE/SLIDE MODULAR SLIDE-IN</td> <td style="text-align: right; padding: 2px;">PAGE 21</td> </tr> <tr> <td colspan="2" style="padding: 2px;">90-45-ECL MODULAR SLIDE-IN</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">150-70-ECL MODULAR SLIDE-IN</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">200-100-ECL MODULAR SLIDE-IN</td> <td></td> </tr> </table> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">PORTABLE/SLIDE MODULAR SLIDE-IN</td> <td style="text-align: right; padding: 2px;">PAGE 22</td> </tr> <tr> <td colspan="2" style="padding: 2px;">70-35-GP PORTABLE SLIDE-IN</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">90-45-DS MODULAR SLIDE-IN</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">150-70-DS MODULAR SLIDE-IN</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">200-100-DS MODULAR SLIDE-IN</td> <td></td> </tr> </table>	SPLIT-SHAFT PUMPS		PAGE 5	CSC22	ESU1C22		CSUC22	CXC22		CMC22	CXSC22		CMUC22			PTO-DRIVEN PUMPS		PAGE 8	CPK-2	CLK	CMK	CPK-3	CLPA	CMPA	CPK-4	CSK	CMUK	CGK	CSPA	CMUPA	CGPA	CSUK	HLUK	CXK	CSUPA	HLUPA	CXPA			INTERNATIONAL REAR-MOUNT PUMPS		PAGE 13	HL400	HL200		HL300	PASSPORT S200		DIRECT-ENGINE MOUNTED PUMPS		PAGE 15	CPT-2	CGT		CPT-3	CXT		CPT-4	CLT		REAR-MOUNT		PAGE 17	CMD	CSUD		CMUD	HLUD		CSD	ESU1		ECLIPSE™ CAFSYSTEMS		PAGE 19	ECLIPSE™			ECLIPSE™ ES			ECLIPSE™ GEN 2.0			PORTABLE/SLIDE MODULAR SLIDE-IN		PAGE 21	90-45-ECL MODULAR SLIDE-IN			150-70-ECL MODULAR SLIDE-IN			200-100-ECL MODULAR SLIDE-IN			PORTABLE/SLIDE MODULAR SLIDE-IN		PAGE 22	70-35-GP PORTABLE SLIDE-IN			90-45-DS MODULAR SLIDE-IN			150-70-DS MODULAR SLIDE-IN			200-100-DS MODULAR SLIDE-IN			<table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">INTEGRATED PUMPS / COMPRESSORS</td> <td style="text-align: right; padding: 2px;">PAGE 23</td> </tr> <tr> <td style="padding: 2px;">250-100-P</td> <td style="padding: 2px;">500-150-P</td> <td></td> </tr> <tr> <td style="padding: 2px;">250-120-P</td> <td style="padding: 2px;">750-1000-100-P</td> <td></td> </tr> <tr> <td style="padding: 2px;">500-100-P</td> <td style="padding: 2px;">750-1250-100-P</td> <td></td> </tr> <tr> <td style="padding: 2px;">500-120-P</td> <td></td> <td></td> </tr> </table> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">PTO-DRIVEN AIR COMPRESSOR KITS</td> <td style="text-align: right; padding: 2px;">PAGE 23</td> </tr> <tr> <td colspan="2" style="padding: 2px;">80-P</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">140-P</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">200-P</td> <td></td> </tr> </table> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">FOAM SYSTEMS</td> <td style="text-align: right; padding: 2px;">PAGE 24</td> </tr> <tr> <td colspan="2" style="padding: 2px;">AQUIS™ 1.5</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">AQUIS™ 3.0</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">AQUIS™ 6.0</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">FOAMFILL™</td> <td></td> </tr> </table> <div style="text-align: right; margin-top: 10px;">  </div> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">SPECIAL APPLICATIONS</td> <td style="text-align: right; padding: 2px;">PAGE 25</td> </tr> </table> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">ARFF PUMPS</td> <td style="text-align: right; padding: 2px;">PAGE 27</td> </tr> <tr> <td style="padding: 2px;">CPK-5</td> <td style="padding: 2px;">CZ</td> <td></td> </tr> <tr> <td style="padding: 2px;">CR</td> <td style="padding: 2px;">CZU</td> <td></td> </tr> <tr> <td style="padding: 2px;">CRU-1</td> <td style="padding: 2px;">CX</td> <td></td> </tr> </table> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">PORTABLE AND MOTOR PUMPS</td> <td style="text-align: right; padding: 2px;">PAGE 28</td> </tr> <tr> <td style="padding: 2px;">PB18-4025B</td> <td style="padding: 2px;">E501</td> <td></td> </tr> <tr> <td style="padding: 2px;">PB18-2515</td> <td style="padding: 2px;">E511</td> <td></td> </tr> <tr> <td style="padding: 2px;">PB18-3030</td> <td></td> <td></td> </tr> <tr> <td style="padding: 2px;">PB18-G2015</td> <td></td> <td></td> </tr> </table> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc; padding: 2px;">FIRE PUMP ACCESSORIES</td> <td style="text-align: right; padding: 2px;">PAGE 29</td> </tr> <tr> <td colspan="2" style="padding: 2px;">DISCHARGE VALVES</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">INTAKE RELIEF VALVE</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">MONARCH™ INTAKE VALVE</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">OVERHEAT PROTECTION MANAGER</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">PRIMING PUMPS</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">PRIMING VALVES</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">PNEUMATIC SHIFT</td> <td></td> </tr> <tr> <td colspan="2" style="padding: 2px;">VENTURIS™ AIR PRIMER</td> <td></td> </tr> </table>	INTEGRATED PUMPS / COMPRESSORS		PAGE 23	250-100-P	500-150-P		250-120-P	750-1000-100-P		500-100-P	750-1250-100-P		500-120-P			PTO-DRIVEN AIR COMPRESSOR KITS		PAGE 23	80-P			140-P			200-P			FOAM SYSTEMS		PAGE 24	AQUIS™ 1.5			AQUIS™ 3.0			AQUIS™ 6.0			FOAMFILL™			SPECIAL APPLICATIONS		PAGE 25	ARFF PUMPS		PAGE 27	CPK-5	CZ		CR	CZU		CRU-1	CX		PORTABLE AND MOTOR PUMPS		PAGE 28	PB18-4025B	E501		PB18-2515	E511		PB18-3030			PB18-G2015			FIRE PUMP ACCESSORIES		PAGE 29	DISCHARGE VALVES			INTAKE RELIEF VALVE			MONARCH™ INTAKE VALVE			OVERHEAT PROTECTION MANAGER			PRIMING PUMPS			PRIMING VALVES			PNEUMATIC SHIFT			VENTURIS™ AIR PRIMER		
SPLIT-SHAFT PUMPS		PAGE 5																																																																																																																																																																																																																	
CSC22	ESU1C22																																																																																																																																																																																																																		
CSUC22	CXC22																																																																																																																																																																																																																		
CMC22	CXSC22																																																																																																																																																																																																																		
CMUC22																																																																																																																																																																																																																			
PTO-DRIVEN PUMPS		PAGE 8																																																																																																																																																																																																																	
CPK-2	CLK	CMK																																																																																																																																																																																																																	
CPK-3	CLPA	CMPA																																																																																																																																																																																																																	
CPK-4	CSK	CMUK																																																																																																																																																																																																																	
CGK	CSPA	CMUPA																																																																																																																																																																																																																	
CGPA	CSUK	HLUK																																																																																																																																																																																																																	
CXK	CSUPA	HLUPA																																																																																																																																																																																																																	
CXPA																																																																																																																																																																																																																			
INTERNATIONAL REAR-MOUNT PUMPS		PAGE 13																																																																																																																																																																																																																	
HL400	HL200																																																																																																																																																																																																																		
HL300	PASSPORT S200																																																																																																																																																																																																																		
DIRECT-ENGINE MOUNTED PUMPS		PAGE 15																																																																																																																																																																																																																	
CPT-2	CGT																																																																																																																																																																																																																		
CPT-3	CXT																																																																																																																																																																																																																		
CPT-4	CLT																																																																																																																																																																																																																		
REAR-MOUNT		PAGE 17																																																																																																																																																																																																																	
CMD	CSUD																																																																																																																																																																																																																		
CMUD	HLUD																																																																																																																																																																																																																		
CSD	ESU1																																																																																																																																																																																																																		
ECLIPSE™ CAFSYSTEMS		PAGE 19																																																																																																																																																																																																																	
ECLIPSE™																																																																																																																																																																																																																			
ECLIPSE™ ES																																																																																																																																																																																																																			
ECLIPSE™ GEN 2.0																																																																																																																																																																																																																			
PORTABLE/SLIDE MODULAR SLIDE-IN		PAGE 21																																																																																																																																																																																																																	
90-45-ECL MODULAR SLIDE-IN																																																																																																																																																																																																																			
150-70-ECL MODULAR SLIDE-IN																																																																																																																																																																																																																			
200-100-ECL MODULAR SLIDE-IN																																																																																																																																																																																																																			
PORTABLE/SLIDE MODULAR SLIDE-IN		PAGE 22																																																																																																																																																																																																																	
70-35-GP PORTABLE SLIDE-IN																																																																																																																																																																																																																			
90-45-DS MODULAR SLIDE-IN																																																																																																																																																																																																																			
150-70-DS MODULAR SLIDE-IN																																																																																																																																																																																																																			
200-100-DS MODULAR SLIDE-IN																																																																																																																																																																																																																			
INTEGRATED PUMPS / COMPRESSORS		PAGE 23																																																																																																																																																																																																																	
250-100-P	500-150-P																																																																																																																																																																																																																		
250-120-P	750-1000-100-P																																																																																																																																																																																																																		
500-100-P	750-1250-100-P																																																																																																																																																																																																																		
500-120-P																																																																																																																																																																																																																			
PTO-DRIVEN AIR COMPRESSOR KITS		PAGE 23																																																																																																																																																																																																																	
80-P																																																																																																																																																																																																																			
140-P																																																																																																																																																																																																																			
200-P																																																																																																																																																																																																																			
FOAM SYSTEMS		PAGE 24																																																																																																																																																																																																																	
AQUIS™ 1.5																																																																																																																																																																																																																			
AQUIS™ 3.0																																																																																																																																																																																																																			
AQUIS™ 6.0																																																																																																																																																																																																																			
FOAMFILL™																																																																																																																																																																																																																			
SPECIAL APPLICATIONS		PAGE 25																																																																																																																																																																																																																	
ARFF PUMPS		PAGE 27																																																																																																																																																																																																																	
CPK-5	CZ																																																																																																																																																																																																																		
CR	CZU																																																																																																																																																																																																																		
CRU-1	CX																																																																																																																																																																																																																		
PORTABLE AND MOTOR PUMPS		PAGE 28																																																																																																																																																																																																																	
PB18-4025B	E501																																																																																																																																																																																																																		
PB18-2515	E511																																																																																																																																																																																																																		
PB18-3030																																																																																																																																																																																																																			
PB18-G2015																																																																																																																																																																																																																			
FIRE PUMP ACCESSORIES		PAGE 29																																																																																																																																																																																																																	
DISCHARGE VALVES																																																																																																																																																																																																																			
INTAKE RELIEF VALVE																																																																																																																																																																																																																			
MONARCH™ INTAKE VALVE																																																																																																																																																																																																																			
OVERHEAT PROTECTION MANAGER																																																																																																																																																																																																																			
PRIMING PUMPS																																																																																																																																																																																																																			
PRIMING VALVES																																																																																																																																																																																																																			
PNEUMATIC SHIFT																																																																																																																																																																																																																			
VENTURIS™ AIR PRIMER																																																																																																																																																																																																																			

Contents in this brochure are subject to change without notice.



PUMP PERFORMANCE GUIDE



SPLIT-SHAFT PUMPS

PAGE 5

GPM	l/min	PUMP MODEL - TYPE
500 - 750	1893-2839	CGV - Single-Stage
750 - 1250	2839-4731	CS - Single-Stage
500 - 1500	1893-5678	CX - Single-Stage CXS - Single-Stage
1500 - 2250	5678-8517	CSU - Single-Stage

GPM	l/min	PUMP MODEL - TYPE
1500-2250	5678-8517	ESU1 - Single-Stage
750 - 1250	2839-4731	CM - Two-Stage
1500 - 2250	5678-8517	CMU - Two-Stage

Model Flow Rate at 150 PSI (10 bar) Pressure



PTO-DRIVEN PUMPS

PAGE 8

GPM	l/min	PUMP MODEL - TYPE
300	1135	CPK-2 - Single-Stage
500	1893	CPK-3 - Two-Stage CLVK - Single-Stage CLVPA - Single-Stage
600	2271	CPK-4 - Four-Stage
750	2839	CGVK - Single-Stage CGVPA - Single-Stage

GPM	l/min	PUMP MODEL - TYPE
750 - 1250	2839-4731	CSK - Single-Stage CSPA - Single-Stage CMK - Two-Stage CMPA - Two-Stage CXVK - Single-Stage CXVPA - Single-Stage
1000-1500 (100 low)	3785-5678 (379 low)	HLUK - Simultaneous High and Low Pressure HLUPA - Simultaneous High and Low Pressure
1500	5678	CXSK - Single-Stage CXSPA - Single-Stage CSUK - Single-Stage CMUK - Two-Stage

Model Flow Rate at 150 PSI (10 bar) Pressure



INTERNATIONAL REAR-MOUNT PUMPS PAGE 13

GPM	l/min	PUMP MODEL
100-1000	400-4000	HL400
100-750	400-3000	HL300
100-500	400-2000	HL200
500-750	2000-3000	PASSPORT S200

High Model Flow Rate at 600 PSI (40 bar) Pressure
 Low Model Flow Rate at 150 PSI (10 bar) Pressure

REAR-MOUNTED PUMPS PAGE 17

GPM	l/min	PUMP MODEL - TYPE
750-2250	2839-8517	CSD / CSUD - Single-Stage
		CMD / CMUD - Two-Stage
750-1500	2839-5678	CXD (Includes CXSD Model) - Single-Stage
1000-1500 (100 low)	3785-5678 (378 low)	HLUD - Simultaneous High and Low Pressure
1250-2000	4731-7570	S100D / S101D - Single-Stage

Model Flow Rate at 150 PSI (10 bar) Maximum Pressure


DIRECT-ENGINE MOUNTED PUMPS PAGE 15

GPM	l/min	PUMP MODEL - TYPE
300	1135	CPT-2 - Single-Stage
500	1893	CPT-3 - Two-Stage
		CLVT - Single-Stage
60	227	CPT-4 - Four-Stage
500-750	1893-2839	CGVT - Single-Stage
750-1250	2839-4731	CXVT - Single-Stage

Model Flow Rate at 150 PSI (10 bar) Pressure

3000	11356	CRU-1 - End Suction
4000	15141	CRU-2 - End Suction

Model Flow Rate at 100 PSI (9.6 bar) Pressure
 See Pages 25 and 26

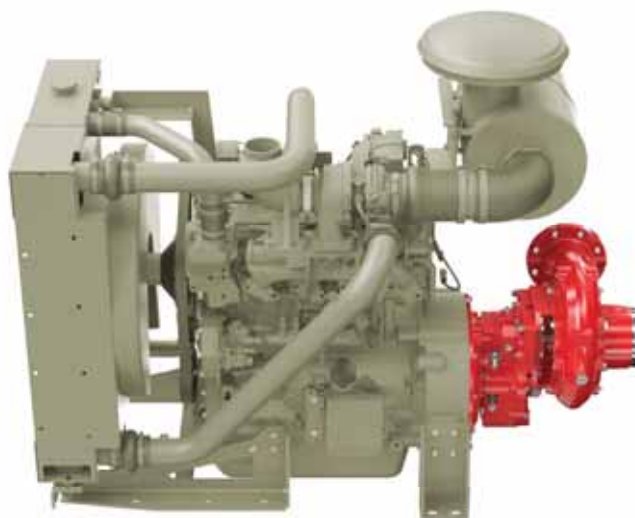

SPLIT-SHAFT PUMPS

A SPLIT-SHAFT FIRE PUMP FOR EVERY APPLICATION.

Waterous split-shaft pumps provide fire industry professionals with easy-to-operate systems that offer the most efficient water delivery system on the market. Admired for their craftsmanship and exclusive design features, Waterous split-shaft pumps have become the primary firefighting tools of fire departments around the globe.


SPLIT-SHAFT PUMP

CS / CSU



Designed with a two-piece, horizontally split body with intake and discharge passageways in a single casting and on the same level. This design provides the lowest possible height, a lower center of gravity, and more room for hose reels, hose beds and other equipment.

- Flame-plated impellers (standard on CSU, optional on CS)
- Two-piece, horizontally-split, high-tensile strength cast iron pump casing
- Optional bronze/gunmetal pump casing
- All deep-groove oil and grease lubricated ball bearings located outside the pump casing
- Bronze double-hubbed accurately balanced impeller
- Stainless steel separable impeller shaft
- Replaceable bronze impeller rings
- Flinger rings mounted on impeller shaft
- Adjustable BFG packing standard (spring-loaded mechanical seal available)
- C22 Transmission consisting of an aluminum case and chain-driven for silent operation
- Maximum Pump Pressure: 400 PSI (27.6 bar)

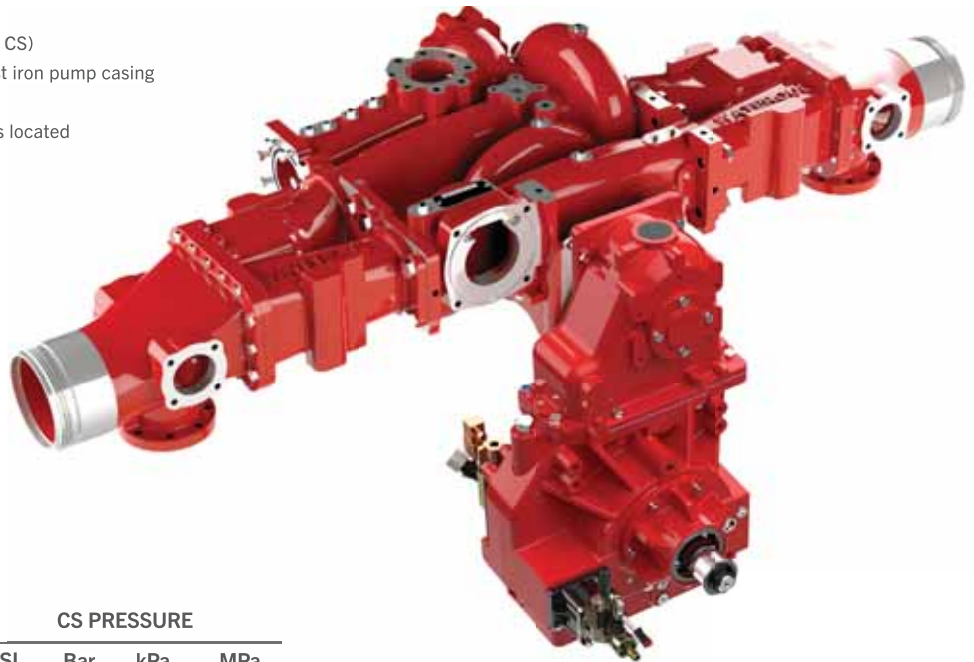

CS FLOW

GPM	750, 1000, 1250
l/min	2839, 3785, 4731
l/sec	47, 63, 79

CS PRESSURE

PSI	Bar	kPa	MPa
150	10	1000	1.0

CSU FLOW

GPM	1500, 1750, 2000, 2250
l/min	5678, 6624, 7570, 8517
l/sec	95, 110, 126, 142

CSU PRESSURE

PSI	Bar	kPa	MPa
150	10	1000	1.0



SPLIT-SHAFT PUMPS


SPLIT-SHAFT PUMP

CM / CMU

The low profile split-shaft two-stage series/parallel pump with ball-type transfer valve allows you to switch from pressure to volume smoothly and easily.



- Flame-plated impellers (standard on CMU, optional on CM)
- Two-piece, horizontally-split, high-tensile strength cast iron pump casing
- Optional bronze/gunmetal pump casing
- All deep-groove oil and grease lubricated ball bearings located outside the pump casing
- Bronze double-hubbed accurately balanced impellers
- Stainless steel separable impeller shaft
- Replaceable bronze impeller rings
- Flinger rings mounted on impeller shaft
- Adjustable BFG packing standard (spring-loaded mechanical seal available)
- Bronze ball-type transfer valve provides smooth transfer to either PRESSURE or VOLUME without sticking
- C22 Transmission consisting of an aluminum case and chain-driven for silent operation
- Maximum Pressure: 600 PSI (41 bar)

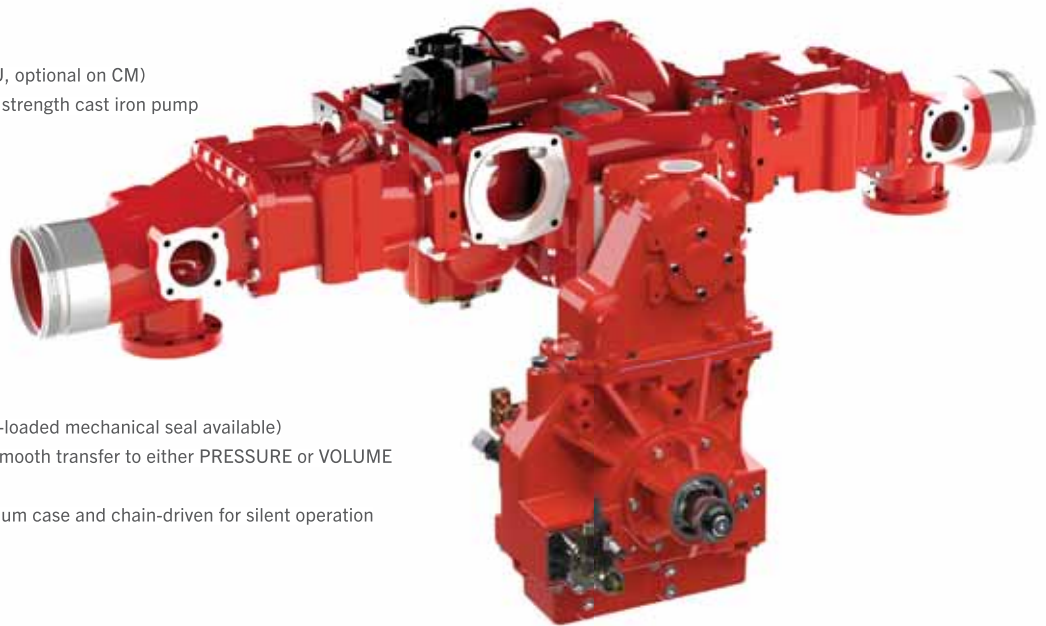

CM FLOW	
GPM	750, 1000, 1250
l/min	2839, 3785, 4731
l/sec	47, 63, 79

CM PRESSURE			
PSI	Bar	kPa	MPa
150	10	1000	1.0

CMU FLOW	
GPM	1500, 1750, 2000, 2250
l/min	5678, 6624, 7570, 8517
l/sec	95, 110, 126, 142

CMU PRESSURE			
PSI	Bar	kPa	MPa
150	10	1000	1.0

**NEW
PRODUCT**



SPLIT-SHAFT PUMPS

SPLIT-SHAFT PUMP

ESU1

Get the power and performance of a traditional midship fire pump in a compact, lightweight design.

- Cast ductile iron body
- Dual stripping edge volute
- Passive lubrication system
- Self-adjusting mechanical seal
- Mechanically and hydraulically balanced impeller
- Replaceable bronze wear rings
- Pump Inducer: Raises inlet pressure to the impeller for higher GPM
- 8-inch Victaulic® Intake with optional dual 6-inch "ram's horn" intake
- C22 Transmission consisting of an aluminum case and chain-driven for silent operation

ESU1 FLOW

GPM	1500, 1750, 2000, 2250*
l/min	5678, 6624, 7570, 8517
l/sec	94, 110, 126, 141

ESU1 PRESSURE

PSI	Bar	kPa	MPa
150	10	1000	1.0

*pump inducer required

SPLIT-SHAFT PUMP

CX / CXS Series

The most versatile pump offered by Waterous. When you need the performance of a larger split-shaft pump, but just don't have the compartment space, the CX/CXS is the answer.



- Cast ductile iron body
- Dual stripping edge volute
- Passive lubrication system
- Self-adjusting mechanical seal
- Mechanically and hydraulically balanced impeller
- Replaceable bronze wear rings
- All deep-groove anti-friction ball bearings, oil-splash lubricated
- 5-inch ANSI flange or optional end flanged discharge manifold
- C22 Transmission consisting of an aluminum case and chain driven for silent operation

CXC22 / CXSC22 FLOW

GPM	750, 1000, 1250, 1500*
l/min	2839, 3785, 4731, 5678*
l/sec	47, 63, 79, 95*

CX / CXS PRESSURE

PSI	Bar	kPa	MPa
150	10	1000	1.0

**Using both sides of the "Ram Horn" style intake fitting (CXSC22 Models Only)

SPLIT-SHAFT PUMP

CG Series

The single stage design with vertically-split volute and pump transmission provides simple operation, easy maintenance and high reserve capacity.



- High-tensile, close-grained gray iron (bronze/gunmetal optional), two-piece, vertically-split volute body
- 17-4 stainless steel, heat treated impeller
- Self-adjusting mechanical seal
- Fully-enclosed, bronze, double-hubbed impeller with flame-plated hubs
- Victaulic®, threaded or flanged intake connections
- C22 Transmission consisting of an aluminum case and chain driven for silent operation

CG PERFORMANCE

	GPM	L/min	L/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	750	2839	47	150	10	1000	1.0
MAXIMUM PRESSURE	80	300	5	350	24	2400	2.4



PTO-DRIVEN PUMPS

PUMPING ON THE GO.

Provide true "pump and roll" capability while reducing transmission wear on your apparatus by adding a PTO fire pump to your firefighting arsenal. Available in multiple sizes and styles, Waterous has a PTO fire pump to fit your requirements and apparatus set-up perfectly.

PTO-DRIVEN PUMP

CPK-2

The CPK-2 is driven by a transmission side-mounted PTO and is able to accommodate multiple lines for straight stream or fog nozzles.



- High tensile, close-grained gray iron casing (bronze/gunmetal optional), one-piece volute body
- 17-4 stainless steel, heat-treated impeller shaft (monel shaft optional)
- Bronze double-hubbed precision-balanced impeller
- 3-inch (76.2mm) NPT or BSP intake; 2-inch (50mm) NPT or BSP discharge (BSP threads available straight or tapered)
- Multiple gearbox mounting positions (horizontally, vertically or inverted)
- Seven optional speed-increasing transmission ratios
- Crown-shaved, carburized and hardened helical cut, constant-mesh quiet gears
- K Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears

CPK-2 PERFORMANCE

	GPM	L/min	L/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	300	1135	18	150	10	1000	1.0
MAXIMUM PRESSURE	60	227	3.8	400	28	2800	2.8

PTO-DRIVEN PUMP

CPK-3

A compact two-stage pump with "pump and roll" capability making it ideal for extinguishing grass and brush fires.



- High tensile, close-grained gray iron casing (bronze/gunmetal optional), one-piece volute body
- Bronze double-hubbed, precision-balanced impellers
- Separable impeller shaft for ease of serviceability
- Push-pull manual bronze transfer valve
- Available in either rotation of input shaft
- 4-inch (101.4mm) NPT tee adapter intake; two 2-inch (50mm) or 2.5-inch (64mm) NPT tee adapter (or 2.5-inch (64mm) tapped flange) discharge
- K Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears
- Seven optional speed-increasing transmission ratios

CPK-3 PERFORMANCE

	GPM	L/min	L/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	500	1893	32	150	10	1000	1.0
MAXIMUM PRESSURE	60	227	3.8	800	55	5500	5.5

PTO-DRIVEN PUMPS

PTO-DRIVEN PUMP

CPK-4

An ultra high-pressure, lightweight, 4-stage centrifugal pump. Able to produce high-pressure fog while the pumper is in motion or stationary.



- High-tensile, close-grained gray iron (bronze/gunmetal optional), two-piece, horizontally-split volute body
- Ni-resist; special “stepped” designed wear rings reduce internal leakage and increase efficiency
- Bronze, hydraulically and mechanically balanced impellers
- Impeller hubs are “stepped” to minimize internal bypass
- Adjustable braided flexible graphite (BFG) packing
- Available with either clockwise or counter-clockwise rotation of input shaft
- K Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears

CPK-4 PERFORMANCE

GPM	L/min	L/sec	PSI	Bar	kPa	MPa
60	227	3.8	1000	70	7000	7.0

PTO-DRIVEN PUMP

CGK / CGPA

The single stage design with vertically-split volute and pump transmission provides simple operation, easy maintenance and high reserve capacity.



- High-tensile, close-grained gray iron (bronze/gunmetal optional), two-piece, vertically-split volute body
- 17-4 stainless steel, heat-treated impeller shaft
- Fully-enclosed, bronze, double-hubbed impeller with flame-plated hubs
- Victaulic®, threaded or flanged intake connections
- Self-adjusting corrosion- and wear-resistant mechanical seals
- Available with K Series or PA Series Transmissions
- K Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears
- PA Series consists of an aluminum case and is chain driven for silent operation

CGK / CGPA PERFORMANCE

	GPM	L/min	L/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	750	2839	47	150	10	1000	1.0
MAXIMUM PRESSURE	80	300	5	350	24	2400	2.4



PTO-DRIVEN PUMPS

PTO-DRIVEN PUMP

CXK / CXPA - CXSK / CXSPA

The CX series is a single-stage, end-suction pump that can be driven by a transmission side-mounted PTO or gear-case transmission.



- High-tensile, close-grained gray iron (bronze/gunmetal optional), two-piece, vertically-split volute body
- 17-4 stainless steel, heat-treated impeller shaft
- Fully-enclosed, bronze, double-hubbed, precision-balanced impeller
- Bronze replaceable wear rings
- Self-adjusting corrosion- and wear-resistant mechanical seals
- Optional crosspipe intake fitting allows for maximum flow of 1500 GPM (5700 L/min)
- Available with K Series or PA Series Transmissions
 - K Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears
 - PA Series consists of an aluminum case and is chain driven for silent operation



CXK / CXPA PERFORMANCE

	GPM	L/min	L/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	1500	5678	95	150	10	1000	1.0

PTO-DRIVEN PUMP

CLK / CLPA

One-piece design featuring intake and discharge arrangements in a wide variety of options to meet your requirements.



- High-tensile, close-grained gray iron (bronze/gunmetal optional), one-piece volute body
- 17-4 stainless steel, heat-treated impeller shaft
- Bronze, double-hubbed, precision-balanced impeller
- Maintenance-free, self-adjusting shaft seal
- Choice of 4-inch (101.4mm) NH or BSP threaded-end intake
- Available with K Series or PA Series Transmissions
 - K Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears
 - PA Series consists of an aluminum case and is chain driven for silent operation



CLK / CLPA PERFORMANCE

	GPM	L/min	L/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	500	1893	32	150	10	1000	1.0



PTO-DRIVEN PUMPS

PTO-DRIVEN PUMP

CSK / CSUK - CSPA / CSUPA

The leading single-stage split-shaft fire pump on the market today provides efficient use of power and performance. Designed with a two-piece, horizontally split body with intake and discharge passageways in a single casting and on the same level, this pump provides the lowest possible height, a lower center of gravity, and more room for hose reels, hose beds and other equipment.



CSUK

- Flame-plated impellers (standard on CSU, optional on CS)
- Two-piece, horizontally-split, high-tensile strength cast iron pump casing
- Optional bronze/gunmetal pump casing
- All deep-groove oil and grease lubricated ball bearings

located outside the pump casing

- Bronze double-hubbed accurately balanced impeller
- Stainless steel separable impeller shaft
- Replaceable bronze impeller rings
- Flinger rings mounted on impeller shaft
- Adjustable BFG packing standard (spring-loaded mechanical seal available)
- Available with K Series or PA Series Transmissions
 - K Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears (CS Series)
 - K Series Transmission consists of a gray iron case and constant-mesh, stainless steel helical gears (CSU Series)
 - PA Series consists of an aluminum case and is chain driven for silent operation

CS FLOW

GPM	750, 1000, 1250
l/min	2839, 3785, 4731
l/sec	47, 63, 79

CS PRESSURE


PSI	Bar	kPa	MPa
150	10	1000	1.0

CSU FLOW

GPM	1500
l/min	5678
l/sec	95

CSU PRESSURE

PSI	Bar	kPa	MPa
150	10	1000	1.0

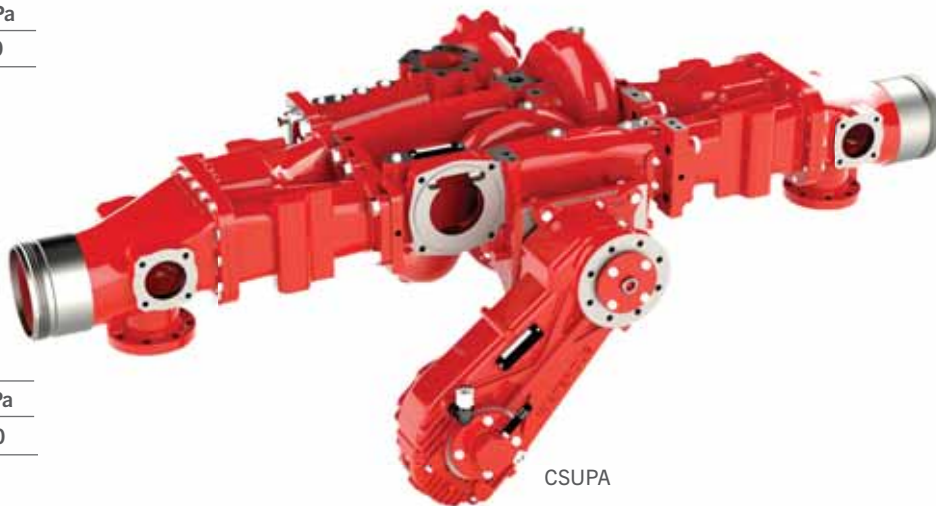

CSUPA



PTO-DRIVEN PUMPS

PTO-DRIVEN PUMP

CMK / CMUK / CMPA

The low profile two-stage series/parallel pump with ball-type transfer valve allows you to switch from pressure to volume smoothly and easily.



CM FLOW


GPM	750, 1000, 1250
l/min	2839, 3785, 4731
l/sec	47, 63, 79

CMUK

CM PRESSURE

PSI	Bar	kPa	MPa
150	10	1000	1.0

- Flame-plated impellers (standard on CMU, optional on CM)
- Two-piece, horizontally-split, high-tensile strength cast iron pump casing
 - Optional bronze/gunmetal pump casing
 - All deep-groove oil and grease lubricated ball bearings located outside the pump casing
- Bronze double-hubbed accurately balanced impellers
- Stainless steel separable impeller shaft
- Replaceable bronze impeller rings
- Bronze ball-type transfer valve provides smooth transfer to either PRESSURE or VOLUME without sticking
- Flinger rings mounted on impeller shaft
- Adjustable BFG packing standard (spring-loaded mechanical seal available)
- Available with K Series or PA Series Transmissions
 - K Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears (CM Series)
 - K Series Transmission consists of a gray iron case and constant-mesh, stainless steel helical gears (CMU Series)
 - PA Series consists of an aluminum case and is chain driven for silent operation

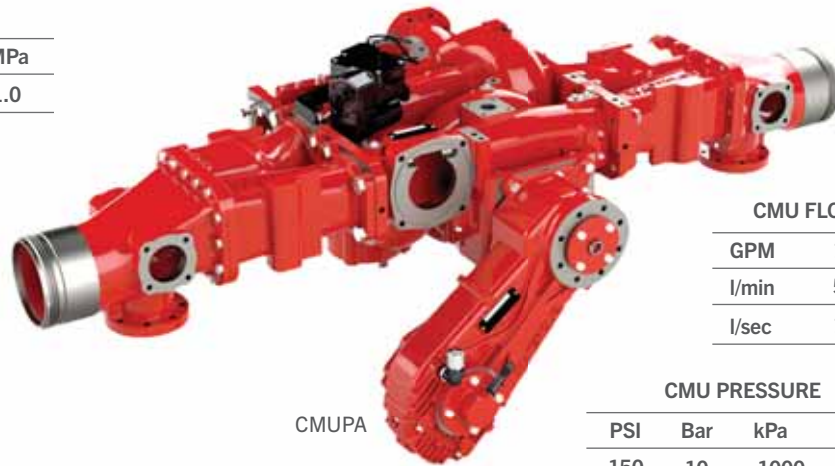

CMU FLOW

GPM	1500
l/min	5678
l/sec	100

CMU PRESSURE

PSI	Bar	kPa	MPa
150	10	1000	1.0

CMUPA

PTO-DRIVEN PUMP

HLUK / HLUPA

The compact, simultaneous High/Low pressure series pump from Waterous is ideal for an urban interface vehicle or wildland firefighting.



HLUK

- Corrosion-resistant anodized aluminum pump body and aluminum intake
- Wear-resistant anodized aluminum low pressure impeller with flame-plated hubs
- Bronze high pressure impeller
- Stainless steel impeller shaft
- Bronze wear rings
- Optional automatic Push-Button Hi/Low Transfer Valve
- Maintenance-free mechanical seal
- Anodized aluminum discharge manifold with six (6) discharge outlets
- External High Pressure Relief Valve (EHPRV):EHPRV is standard equipment. OEM may choose to use their own high pressure relief valve.
- Available with K Series or PA Series Transmissions
 - K Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears
 - PA Series consists of an aluminum case and is chain driven for silent operation



HLUPA

HLUK / HLUPA LOW PRESSURE

GPM	1000, 1250, 1500	PSI	Bar	kPa	MPa
l/min	4000, 5000, 5600	150	10	1000	1.0
l/sec	65, 80, 95				

HLUK / HLUPA HIGH PRESSURE

GPM	100	PSI	Bar	kPa	MPa
l/min	400	600	40	4000	4.0
l/sec	6.5				



INTERNATIONAL REAR-MOUNT FIRE PUMPS

THE LITTLE PUMPS THAT PACK A MIGHTY PUNCH.

Specifically designed for international-style fire vehicles, the compact, rear-mounted simultaneous High/Low pressure series pumps feature built-in high-pressure relief valves for enhanced safety.

REAR-MOUNT FIRE PUMP

HL400

- Corrosion-resistant anodized aluminum or bronze body (gunmetal)
- Wear-resistant anodized aluminum, flame-plated hubs low pressure impeller
- Bronze high pressure impeller
- Stainless steel impeller shaft
- Bronze wear ring
- Maintenance-free mechanical seal
- Available with K gear drive transmission
- Available in clockwise or counterclockwise rotation (not available on bronze models)
- Constructed of anodized aluminum, the pedestal supports the Waterous automatic piston primer and main bearings.
- Anodized aluminum or bronze Intake with 30°droop, two auxiliary 4" side flanges
- HL400 available with 6 in. BSP, 5 in. Victaulic® connection, 150 mm Storz® or 4 in. BSP dual intake
- Anodized aluminum or bronze discharge manifold with six discharge outlets (2) Anodized aluminum non-return discharge valve (low pressure)
- Interstage crossover valve: The valve incorporates both a built-in high pressure relief valve and a removable strainer for the high pressure stage inlet
- 275 lbs (125 kg).



HL400 FLOW

	GPM	L/min	L/sec
HIGH	100	400	6.5
LOW	1000	4000	65

HL400 PRESSURE

PSI	Bar	kPa	MPa
600	40	4000	4.0
150	10	1000	1.0

REAR-MOUNT FIRE PUMP

HL300



- Available in mid-mount configuration
- Optional round-the-pump foam system
- Optional operator's panel
- Optional Storz fittings
- Bronze/gunmetal construction available

- Available with K Series gear-drive transmission
- Available in clockwise or counterclockwise rotation (not available on bronze models)
- 245 lbs (111 kg)

HL300 FLOW

	GPM	L/min	L/sec
HIGH	100	400	6.5
LOW	750	3000	60

HL300 PRESSURE

PSI	Bar	kPa	MPa
600	40	4000	4.0
150	10	1000	1.0

INTERNATIONAL REAR-MOUNT FIRE PUMPS

REAR-MOUNT FIRE PUMP

HL200



- Available in mid-mount configuration
- Optional round-the-pump foam system
- Optional operator's panel
- Optional Storz fittings
- Bronze/gunmetal construction available
- Available with K Series gear-drive transmission
- Available in clockwise or counterclockwise rotation (not available on bronze models)
- 235 lbs (107 kg)

	HL200 FLOW		
	GPM	L/min	L/sec
HIGH	100	400	6.5
LOW	500	2000	33

	HL200 PRESSURE			
	PSI	Bar	kPa	MPa
600	40	4000	4.0	
150	10	1000	1.0	

PASSPORT S200 MODEL



The S200 fire pump was designed by Waterous engineers to provide the utmost quality and reliability that comes with the Waterous name. With the goal of reaching international standards, the S200 accomplished that goal by meeting EN 1028, NFPA 1901 (North America) and CCC in China. The S200 is quieter, lighter and more flexible than any other fire pump on the market today.



	PASSPORT (S200) PERFORMANCE						
	GPM	L/min	L/sec	PSI	Bar	kPa	MPa
NFPA 1901, EN1028 and CCC Ratings	500	2000	33	150	10	1000	1.0
	500	2000	33	225	15	1500	1.5
	750	3000	50	150	10	1000	1.0
	750	3000	50	225	15	1500	1.5

Key Factors:

- Maintenance-free (oil-free primer and self-lubricated bearings)
- Built-in automatic primers
- Weighs less than 200 lbs. (91 kg).

Volute Body and Head:

Bronze with lightweight composite materials

Impeller:

Bronze impellers are standard

Impeller Shaft:

Consists of an impeller mounted on a stainless steel shaft with self-lubricated sealed bearings.

Shaft Seal:

The mechanical seal consists of a flat, highly polished (lapped), self-adjusting (spring-fed) carbon ring that is sealed in the pump body. The carbon ring presses against a highly-polished rotating ring that is sealed to and rotates with the impeller. Mechanical seal is retained in and easily removable seal housing.

Pedestal (Primer Housing):

The pedestal is constructed of anodized aluminum and supports the piston primers and main bearings. Contains no oil.

Maintenance is not required.

Priming:

Integrated, fully automatic, oil and maintenance-free piston primer with 50% more capacity than a typical piston primer. All components are constructed of corrosion-resistant materials.

Thermal Relief Valve:

The thermal relief valve opens as the temperature of the water inside the pump reaches 49° C. The valve opens and diverts water to one of the following locations:

- To the holding tank, vehicle tank or to atmosphere (ground).

Bearings:

The main pump shaft uses long-life, double-row angular contact ball bearing and a single-row ball bearing that are self-lubricated, double-sealed and require no maintenance.

DIRECT-ENGINE MOUNTED PUMPS

DIRECT-ENGINE MOUNTED PUMPS

CPT-2

The CPT-2 is powered by directly mounting to an engine using an SAE bellhousing. Pumps are also able to accommodate multiple lines for straight stream or fog nozzles.



- High tensile, close-grained gray iron casing (bronze/gunmetal optional), one-piece volute body
- 17-4 stainless steel, heat-treated impeller shaft (monel shaft optional)
- Bronze double-hubbed precision-balanced impeller
- 3-inch (76.2mm) NPT or BSP intake; 2-inch (50mm) NPT or BSP discharge (BSP threads available straight or tapered)
- T Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears
- Multiple gearbox mounting positions (horizontally, vertically or inverted)
- Several optional speed-increasing transmission ratios

CPT-2 PERFORMANCE

	GPM	L/min	L/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	300	1135	19	150	10	1000	1.0
MAXIMUM PRESSURE	60	227	3.8	400	28	2800	2.8

DIRECT-ENGINE MOUNTED PUMPS

CPT-3

A compact two-stage pump with “pump and roll” capability making it ideal for extinguishing grass and brush fires.



- High tensile, close-grained gray iron casing (bronze/gunmetal optional), one-piece volute body
- Bronze double-hubbed, precision-balanced impellers
- Separable impeller shaft for ease of serviceability
- Push-pull manual bronze transfer valve
- Available in either rotation of input shaft
- 4-inch (101.4mm) NPT tee adapter intake; two 2-inch (50mm) or 2.5-inch (64mm) NPT tee adapter (or 2.5-inch (64mm) tapped flange) discharge
- T Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears
- Several optional speed-increasing transmission ratios

CPT-3 PERFORMANCE

	GPM	L/min	L/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	500	1893	32	150	10	1000	1.0
MAXIMUM PRESSURE	60	227	3.8	800	55	5500	5.5

DIRECT-ENGINE MOUNTED PUMPS

CPT-4

An ultra high-pressure, lightweight, 4-stage centrifugal pump. Able to produce high-pressure fog while the pumper is in motion or stationary.



- Ni-resist; special “stepped” designed wear rings reduce internal leakage and increase efficiency
- Bronze, hydraulically and mechanically balanced impellers
- Impeller hubs are “stepped” to minimize internal bypass
- High-tensile, close-grained gray iron (bronze/gunmetal optional), two-piece, horizontally-split volute body
- Adjustable braided flexible graphite (BFG) packing
- Available with either clockwise or counter-clockwise rotation of input shaft
- T Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears

CPT-4 PERFORMANCE

GPM	L/min	L/sec	PSI	Bar	kPa	MPa
60	227	3.8	1000	70	7000	7.0

DIRECT-ENGINE MOUNTED PUMPS

DIRECT-ENGINE MOUNTED PUMPS

CGT

The single stage design with vertically-split volute and pump transmission provides simple operation, easy maintenance and high reserve capacity.



- High-tensile, close-grained gray iron (bronze/gunmetal optional), two-piece, vertically-split volute body
- 17-4 stainless steel, heat-treated impeller shaft
- Fully-enclosed, bronze, double-hubbed impeller with flame-plated hubs
- Victaulic®, threaded or flanged intake connections
- Self-adjusting corrosion- and wear-resistant mechanical seals
- T Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears

CGT PERFORMANCE

	GPM	L/min	L/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	750	2839	47	150	10	1000	1.0
MAXIMUM PRESSURE	80	300	5	350	24	2400	2.4

DIRECT-ENGINE MOUNTED PUMPS

CXT

A single-stage end suction pump that is direct-engine mounted via a T Series Transmission.



- High-tensile, close-grained gray iron (bronze/gunmetal optional), two-piece, vertically-split volute body
- 17-4 stainless steel, heat-treated impeller shaft
- Fully-enclosed, bronze, double-hubbed, precision-balanced impeller
- Bronze replaceable wear rings
- Self-adjusting corrosion- and wear-resistant mechanical seals
- Optional crosspipe intake fitting allows for maximum flow of 1500 GPM (5700 L/min)
- T Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears

CXT PERFORMANCE

	GPM	L/min	L/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	1500	5678	95	150	10	1000	1.0

DIRECT-ENGINE MOUNTED PUMPS

CLT

One-piece design featuring intake and discharge arrangements in a wide variety of options to meet your requirements.



- High-tensile, close-grained gray iron (bronze/gunmetal optional), one-piece volute body
- 17-4 stainless steel, heat-treated impeller shaft
- Bronze, double-hubbed, precision-balanced impeller
- Maintenance-free, self-adjusting shaft seal
- Choice of 4-inch (101.4mm) NH or BSP threaded-end intake
- T Series Transmission consists of an aluminum case and constant-mesh, stainless steel helical gears

CLT PERFORMANCE

	GPM	L/min	L/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	500	1893	32	150	10	1000	1.0



REAR-MOUNTED PUMPS

A FIRE PUMP FOR EVERY APPLICATION.


Waterous rear-mounted pumps provide fire industry professionals with easy-to-operate systems that offer the most efficient water delivery system on the market. Coupled with a TC22 Series PTO, you can drive a variety of Waterous pumps at the rear of the apparatus.

REAR MOUNTED PUMPS

TC22

TC22 PTO enables a fire pump to be rear mounted in an apparatus. The TC22 transmits power from the apparatus' automatic transmission to the drive axle of the vehicle when in ROAD mode or when shifted to PTO mode, transmits power to the rear-mounted pump via a PTO drive shaft.

- Chain: High-strength, silent chain
- Passive lubrication system
- Power shift
- High-strength aluminum case
- Output: Single to front or rear or dual to both front and rear.
- Driveline: 2.35 inch, 46-tooth involute, 19,000 LB-FT (25,780 N.m) torque rating

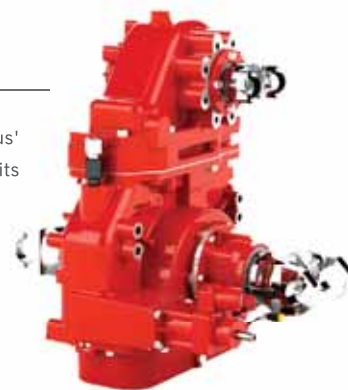

REAR MOUNTED PUMPS

CSD / CSUD

The leading single-stage split-shaft fire pump on the market today is available as a direct drive pump providing efficient use of power and performance. Designed with a two-piece, horizontally split body with intake and discharge passageways in a single casting and on the same level, this pump provides the lowest possible height, a lower center of gravity, and more room for hose reels, hose beds and other equipment.



- Flame-plated impellers (standard on CSU, optional on CS)
 - Two-piece, horizontally-split, high-tensile strength cast iron pump casing
 - Optional bronze/gunmetal pump casing
 - All deep-groove oil and grease lubricated ball bearings located outside the pump casing
- Bronze double-hubbed accurately balanced impeller
- Stainless steel separable impeller shaft
- Replaceable bronze impeller rings
- Flinger rings mounted on impeller shaft
- Adjustable BFG packing standard (spring-loaded mechanical seal available)

CS FLOW

GPM	750, 1000, 1250
l/min	2839, 3785, 4731
l/sec	47, 63, 79

CS PRESSURE

PSI	Bar	kPa	MPa
150	10	1000	1.0

CSU FLOW

GPM	1500, 1750, 2000, 2250
l/min	5678, 6624, 7570, 8517
l/sec	95, 110, 126, 142

CSU PRESSURE

PSI	Bar	kPa	MPa
150	10	1000	1.0

REAR-MOUNTED PUMPS

REAR MOUNTED PUMPS

CMD / CMUD

The low profile midship two-stage series/parallel pump with ball-type transfer valve allows you to switch from pressure to volume smoothly & easily.



- Flame-plated impellers (standard on CMU, optional on CM)
- Two-piece, horizontally-split, high-tensile strength cast iron pump casing
- Optional bronze/gunmetal pump casing
- All deep-groove oil and grease lubricated ball bearings located outside the pump casing
 - Bronze double-hubbed accurately balanced impellers
- Stainless steel separable impeller shaft
- Replaceable bronze impeller rings
- Bronze ball-type transfer valve provides smooth transfer to either PRESSURE or VOLUME without sticking
- Flinger rings mounted on impeller shaft
- Adjustable BFG packing standard (spring-loaded mechanical seal available)

CMD FLOW

GPM	750, 1000, 1250
l/min	2839, 3785, 4731
l/sec	47, 63, 79

CMD PRESSURE

PSI	Bar	kPa	MPa
150	10	1000	1.0

CMUD FLOW

GPM	1500, 1750, 2000, 2250
l/min	5678, 6624, 7570, 8517
l/sec	95, 110, 126, 142

CMUD PRESSURE

PSI	Bar	kPa	MPa
150	10	1000	1.0



REAR MOUNTED PUMPS

ESU1D

Get the power and performance of a traditional midship fire pump in a compact, lightweight design.



- Cast ductile iron body
- Dual stripping edge volute
- Passive lubrication system
- Self-adjusting mechanical seal
- Mechanically and hydraulically balanced impeller
- Replaceable bronze wear rings
- Pump Inducer: Raises inlet pressure to the impeller for higher GPM
- 8-inch Victaulic® Intake with optional dual 6-inch "ram's horn" intake

ESU1 FLOW

GPM	1500, 1750, 2000, 2250*
l/min	5678, 6624, 7570, 8517
l/sec	94, 110, 126, 141

*pump inducer required

ESU1 PRESSURE

PSI	Bar	kPa	MPa
150	10	1000	1.0

REAR MOUNTED PUMPS

HLUD

The compact, simultaneous High/Low pressure series pump from Waterous is ideal for an urban interface vehicle or wildland firefighting.

- Corrosion-resistant anodized aluminum pump body
- Wear-resistant anodized aluminum low pressure impeller with flame-plated hubs
- Bronze high pressure impeller
- Stainless steel impeller shaft
- Bronze wear rings
- Maintenance-free mechanical seal
- Anodized aluminum intake
- Anodized aluminum discharge manifold with six (6) discharge outlets
- External High Pressure Relief Valve (EHPRV):
 - EHPRV is standard equipment. OEM may choose to use their own high pressure relief valve.
- Anodized aluminum pedestal
- Optional automatic push button Hi/Low Transfer Valve.




HLUD LOW PRESSURE

GPM	1000, 1250, 1500	PSI	Bar	kPa	MPa
l/min	4000, 5000, 5600	150	10	1000	1.0
l/sec	65, 80, 95				

HLUD HIGH PRESSURE

GPM	100	PSI	Bar	kPa	MPa
l/min	400	600	40	4000	4.0
l/sec	6.5				

CAFSystems™
ECLIPSE™

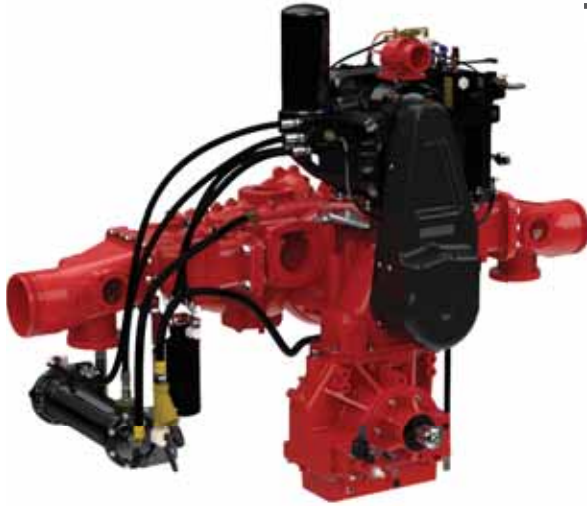

THE WORLD'S MOST TRUSTED CAFS.

Used by more fire departments around the world than any other CAFSystem, the Eclipse™ CAFSystem from Waterous is easy to operate, incredibly efficient and a proven performer. The Eclipse™ CAFSystem buttresses your attack capabilities with big flow rates up to 2,250 GPM, high pressure up to 150 PSI and impressive suppression results.

- Encapsulated compressor with fewer hose, less noise and the ability to shift in and out as needed while the pump is in use
- Electric Auto-Sync balancing system to match air and water pressure
- Available with AQUIS™ foam proportioner
- Free onsite product orientation

CS FLOW	
GPM	750, 1000, 1250
l/min	2839, 3785, 4731
l/sec	47, 63, 79

CS PRESSURE			
PSI	Bar	kPa	MPa
150	10	1000	1.0

CSU FLOW	
GPM	1500, 1750, 2000, 2250
l/min	5678, 6624, 7570, 8517
l/sec	95, 110, 126, 142

CSU PRESSURE			
PSI	Bar	kPa	MPa
150	10	1000	1.0

CMU FLOW	
GPM	1500, 1750, 2000, 2250
l/min	4731, 5678, 6624, 7570
l/sec	79, 95, 110, 126

CMU PRESSURE			
PSI	Bar	kPa	MPa
150	10	1000	1.0

CAFSystems™
ECLIPSE™ ES



BIG SUPPRESSION. SMALL PACKAGE.

The Eclipse ES™ compressed air foam system is proof that you can still get serious power out of a tiny package. Unmatched in the industry for performance and versatility, the Eclipse ES™ is available in multiple configurations to fit your needs while providing unmatched fire extinguishing capabilities.

- Available in two different models
- Compatible w/ CX and TC22 Series PTO

CX FLOW	
GPM	750, 1000, 1250, 1500*
l/min	2839, 3785, 4731, 5678
l/sec	47, 63, 79, 95

CX PRESSURE			
PSI	Bar	kPa	MPa
150	10	1000	1.0





ECLIPSE™ GEN 2.0 CAFSystems

PERFECT FOAM, EVERY TIME.

WATEROUS

ECLIPSE™ CAFSystem 2.0

Waterous engineers have developed the new ECLIPSE™ GEN 2.0 CAFSystem to easily produce compressed air foam without the complicated settings needed in other cafsystems. ECLIPSE™ GEN 2.0 incorporates a powerful integrated midship-mounted air compressor system and the patent-pending Waterous Foamulator to produce a bubble stream that keeps the water from separating from the foam practically eliminating slug flow. Each ECLIPSE™ GEN 2.0 CAFSystem has pre-set flow and pressure rates for air and water eliminating the need for the operator to perform time consuming adjustments.

ECLIPSE™ GEN 2.0 CAFSystems

150-ECL



- 80% OF WATER CONTENT IN THE FOAM IS EFFECTIVELY USED FOR FIRE FIGHTING
- IMPROVED FIREFIGHTER SAFETY
- FASTER KNOCKDOWN TIME
- LESS PROPERTY DAMAGE
- LESS WATER USED

AQUIS™ 3.0 FOAM PROPORTIONER

- 3.0 GPM (9.5 l/min) @ 150 PSI (10 bar)
- Exceeds NFPA 1901 requirements for proportioning accuracy
- Pre-plumbed and pre-mounted



WATEROUS SPLIT-SHAFT PUMP

The ECLIPSE™ GEN 2.0 CAFSystem is currently available on Waterous CS, CSU, CMU and CX midship pumps with split-shaft transmissions.

150 sCFM AIR COMPRESSOR

- 150 sCFM (4.25 m3/min)
- Quiet, efficient and dependable rotary screw air compressor
- Toothed-belt drive requires no lubrication or maintenance

ECLIPSE™ GEN 2.0 FOAMULATOR


A characteristic of each ECLIPSE™ GEN 2.0 CAFSystem is the pre-set flow rate and pre-set pressure for water and air. The operator does not have to adjust flows and pressures.

ECLIPSE™ GEN 2.0 CAFSystem uses a stand-alone FOAMULATOR for each operated discharge outlet. Three 2" FOAMULATORS are standard. The patent-pending, Waterous engineered FOAMULATORS develop the foam extinguishing agent by mixing turbulent air into the foam solution. The FOAMULATORS include the following items:

- Volume flow regulation of water and air
- Volume flow limitations of water and air
- Non-return valves for water and air
- Mixing chamber
- Wet-dry changeover



- Engages the ECLIPSE™ GEN 2.0 CAFSystem
- Select from Dry or Wet Foam
- Monitor Intake and Discharges
- Monitor Engine / Pump Performance



ECLIPSE™ GEN 2.0 CAFSystems MODULAR SLIDE-IN

WATEROUS

ECLIPSE™ CAFSystem 2.0

- PRE-SET FLOW RATE
- PRE-SET PRESSURE FOR WATER AND AIR
- NO OPERATOR ADJUSTMENTS NEEDED DURING OPERATION

ECLIPSE™ GEN 2.0 Modular Slide-In

90-45-ECL

- Kubota 23.5 HP (17.5 kW) diesel-fueled engine
- Hypro 9203 Centrifugal Pump
- Waterous ECLIPSE Gen 2.0 CAFSystem Two 1-1/2" Foamulators. ECLIPSE Gen 2.0 CAFSystem is the pre-set flow rate and pre-set pressure for water and air. The operator does not have to adjust flows and pressures during operation.
- 8" Tellurus Control Panel
- One button engages fire pump, foam proportioner and CAFSystem
- Easily select Wet or Dry Foam
- 45 sCFM (1.4 m³/min) compressor
- Steel Frame
- Aquis 1.5 Foam Proportioner

90-45-ECL FLOW

GPM	90
l/min	340
l/sec	5.67
SCFM	45
M ³ /min	1.2

90-45-ECL PRESSURE

	PSI	Bar	kPa	MPa
WATER	100	6.9	690	0.69
AIR	100	6.9	690	0.69



8" Tellurus™

- One button engages fire pump, foam proportioner and CAFSystem

ECLIPSE™ GEN 2.0 Modular Slide-In

150-70-ECL

- Kohler 49 HP (36.5 kW), diesel-fueled engine
- Waterous CPD-2 Pump
- 70 sCFM compressor
- Steel Frame
- Aquis Foam Proportioner
- Waterous ECLIPSE Gen 2.0 CAFSystem Two 1-1/2" Foamulators. ECLIPSE Gen 2.0 CAFSystem is the pre-set flow rate and pre-set pressure for water and air. The operator does not have to adjust flows and pressures during operation.
- 8" Tellurus Control Panel
- One button engages fire pump, foam proportioner and CAFSystem
- Easily select Wet or Dry Foam

150-70-ECL FLOW

GPM	150
l/min	567
l/sec	9.45
SCFM	70
M ³ /min	1.97

150-70-ECL PRESSURE

	PSI	Bar	kPa	MPa
WATER	150	10	1000	1.0
AIR	125	8.6	860	0.86



8" Tellurus™

- One button engages fire pump, foam proportioner and CAFSystem

ECLIPSE™ GEN 2.0 Modular Slide-In

200-100-ECL

- Kohler 74 HP (55 kW) diesel-fueled engine
- Waterous CPD-2 Pump
- Waterous ECLIPSE Gen 2.0 CAFSystem, Two 1-1/2" Foamulators. ECLIPSE Gen 2.0 CAFSystem is the pre-set flow rate and pre-set pressure for water and air. The operator does not have to adjust flows and pressures during operation.
- 8" Tellurus Control Panel
- One button engages fire pump, foam proportioner and CAFSystem
- Easily select Wet or Dry Foam
- 100 sCFM (2.83 m³/min) compressor
- Steel Frame
- Aquis Foam Proportioner

200-100-ECL FLOW

GPM	200
l/min	800
l/sec	13
SCFM	100
M ³ /min	2.83

200-100-ECL PRESSURE

	PSI	Bar	kPa	MPa
WATER	150	10	1000	1.0
AIR	125	8.6	860	0.86



8" Tellurus™

- One button engages fire pump, foam proportioner and CAFSystem



WATEROUS CAFSystems™ MODULAR SLIDE-IN

Modular Slide-In

70-35-GP



- Briggs and Stratton Vanguard two-cylinder, air-cooled, four-cycle engine
- 23 HP (17.2 kW)
- Fire Troll 1.5 Foam Proportioner standard

70-35-GP FLOW

GPM	70
l/min	265
l/sec	4.4
SCFM	35
M ³ /min	.9

70-35-GP PRESSURE

PSI	Bar	kPa	MPa
100	6.9	690	.69

Modular Slide-In

90-45-DS



- Kubota 23.5 HP (17.5 kW) diesel-fueled engine
- Hypro 9203 Centrifugal Pump
- 45 sCFM compressor
- Steel Frame
- Aquis 1.5 Foam Proportioner
- Rotary Dial Foam Proportioning Rate Panel
- Optional Operator Interface Terminal (OIT) for selecting foam proportioning rates

90-45-DS FLOW

GPM	90
l/min	340
l/sec	5.67
SCFM	45
M ³ /min	1.2

90-45-DS PRESSURE

	PSI	Bar	kPa	MPa
WATER	100	6.9	690	0.69
AIR	100	6.9	690	0.69

Modular Slide-In

150-70-DS



- Kohler 49 HP (36.5 kW), diesel-fueled engine
- Waterous CPD-2 Pump
- 70 sCFM compressor
- Steel Frame
- Aquis Foam Proportioner
- Rotary Dial Foam Proportioning Rate Panel
- Optional Operator Interface Terminal (OIT) for selecting foam proportioning rates

150-70-DS FLOW

GPM	150
l/min	567
l/sec	9.45
SCFM	70
M ³ /min	1.97

150-70-DS PRESSURE

	PSI	Bar	kPa	MPa
WATER	150	10	1000	1.0
AIR	125	8.6	860	0.86

Modular Slide-In

200-100-DS



- Kohler 74 HP (55 kW) diesel-fueled engine
- Waterous CPD-2 Pump
- 100 sCFM compressor
- Steel Frame
- Aquis Foam Proportioner
- Rotary Dial Foam Proportioning Rate Panel
- Optional Operator Interface Terminal (OIT) for selecting foam proportioning rates

200-100-DS FLOW

GPM	200
l/min	800
l/sec	13
SCFM	100
M ³ /min	2.83

200-100-DS PRESSURE

	PSI	Bar	kPa	MPa
WATER	150	10	1000	1.0
AIR	125	8.6	860	0.86

INTEGRATED PUMP / COMPRESSOR SYSTEMS

INTEGRATED PUMP / COMPRESSOR SYSTEMS

500-80-P

Part pump, part compressor, all CAFS fire suppressing power. Waterous has several PTO-driven Integrated Pump/Compressor Systems available to meet your department's needs. These models deliver everything you'd expect in a CAFS unit, including the ability to discharge water, foam solution and compressed air for pneumatic tools. They also include a rotary screw airend with poly-chain.



- CLVK water pump and transmission
- 4-inch Victaulic intake
- Auto Sync panel control
- 3-inch NPT discharge
- Compressor temperature gauge
- Rotary screw compressor

WATER FLOW			AIR FLOW		PRESSURE			
GPM	L/min	L/sec	sCFM	m ³ /min	PSI	Bar	kPa	MPa
500-80-P PERFORMANCE								
500	1893	32			150	10	1000	1.0
			80	2.3	125	8.6	860	.86
500-120-P PERFORMANCE								
500	1893	32			150	10	1000	1.0
			120	3.4	125	8.6	860	.86
500-150-P PERFORMANCE								
500	1893	32			150	10	1000	1.0
			150	4.25	125	8.6	860	.86

Additional models available:

INTEGRATED PUMP / COMPRESSOR SYSTEMS

750-100-P / 1000-100-P / 1250-100-P - 750-150-P / 1000-150-P / 1250-150-P

- Waterous CXVK Pump
- 4-inch ANSI Discharge
- Auto-Sync Control Panel
- Available with AQUIS™ Foam Proportioner
- Compressor Temperature Gauge
- 100 sCFM (2.83 m³/min) or 150 sCFM (4.3 m³/min)
- 6-inch Victaulic Intake

PTO-DRIVEN AIR COMPRESSOR KITS

80-P / 140-P / 200-P



When you consider that a good PTO driven air compressor system is worth its weight in gold, it's hard to imagine the value of a Waterous PTO kit to your fire department. Waterous offers three models available as OEM installation or retrofit. These CAFSystems™ are water-cooled and designed to discharge water, foam solution or compressed air. They come with a rotary screw airend with integral speed increasing gear set, a 1013 shaft yoke and free on-site orientation.



Premium Quality PTO-Driven Air Compressor Kits

AIR FLOW		PRESSURE			
sCFM	m ³ /min	PSI	Bar	kPa	MPa
80	2.3	125	8.6	860	0.86
140	3.9	125	8.6	860	0.86
200	5.6	125	8.6	860	0.86

FOAM PROPORTIONERS

THE PERFECT BLEND OF PERFORMANCE AND VALUE.



It's not easy to properly proportion fire-suppressing Class A foam. To get the ratios right, you need to compensate for a number of variables. Doing so demands world-class engineering coupled with dependable flow meter technology. In other words, you need The AQUIS™ Foam Proportioner from Waterous. It delivers a level of performance and reliability typically reserved for more expensive Class A foam proportioners.

FOAM PROPORTIONERS

AQUIS™ 1.5



- Foam Pump: positive displacement plunger pump
- Pump Motor: 1/3 HP (.27 kW)

	FOAM OUTPUT		
	GPM	L/min	L/sec
AQUIS	1.5	5.7	.1

	PRESSURE			
	PSI	Bar	kPa	MPa
AQUIS	150	10	1000	1.0

MAXIMUM OPERATING PRESSURE			
PSI	Bar	kPa	MPa
450	32	3200	3.2

FOAM PROPORTIONERS

AQUIS™ 3.0 & 6.0



- Foam Pump: positive displacement plunger pump
- AQUIS 3.0 Pump Motor: 1/2 HP (.40 kW)
- AQUIS 6.0 Pump Motor: 1 HP (.80 kW)
- Class A or B Foam

	FOAM OUTPUT		
	GPM	L/min	L/sec
AQUIS	3.0	11.3	.18
AQUIS	6.0	22.6	.36

	PRESSURE			
	PSI	Bar	kPa	MPa
AQUIS	150	10	1000	1.0

MAXIMUM OPERATING PRESSURE			
PSI	Bar	kPa	MPa
450	32	3200	3.2

FOAM PROPORTIONING SYSTEM

FIRE TROLL 150



The Waterous Fire Troll Foam Proportioning System can be inserted in a hose lay at any location, but most typically is inserted in the plumbing between the pump outlet and the live reel. Using the Fire Troll you'll maintain continuous flow up-to but not exceeding 1% foam concentration under varying water pressures and volumes.

Ideally suited to Type 3 engines and portable pumps with long hose lays. Fire Troll has been successfully used in hose lays of 1,000 feet (300 meters) or more and on moderate to steep slopes.



SPECIAL APPLICATIONS

SPECIAL INDUSTRY APPLICATIONS FROM WATEROUS.

DECOKING / DESCALING

CM / CMU SERIES

The continuous build-up of coke on the inner walls of fired heaters and heat exchange surfaces in oil refineries leads to reduced energy efficiency and shutdown of the affected unit. To clean the walls, a device called a pig is sent through the pipeline with high pressure water. The water that forces the pig through the pipeline is the CMU Series Pump. The CMU pump is the only centrifugal pump in the industry that can withstand the wear and tear of decoking/descaling.



	CM FLOW
GPM	750, 1000, 1250
l/min	2839, 3785, 4731
l/sec	47, 63, 79

CM PRESSURE			
PSI	Bar	kPa	MPa
150	10	1000	1.0

	CMU FLOW
GPM	1500, 1750, 2000, 2250
l/min	5678, 6624, 7570, 8517
l/sec	95, 110, 126, 142

CMU PRESSURE			
PSI	Bar	kPa	MPa
150	10	1000	1.0

TRAILER-MOUNTED PUMPING UNITS

2000 TO 4000 GPM UNITS WITH CRU-2 HIGH-FLOW PUMP

Waterous manufactures Trailer Mounted Engine Driven Pumping Systems for the Nuclear Cooling Industry, large dewatering projects or stand-by fire protection. Equipped with a variety of engines and a high-flow CRU-2 pump that can produce up to 4000 GPM.



- Powerful T3 or T4 Compliant Diesel Engine
- CRU-2 High Flow Pump
- Three (3) 6" Pump Inlets with 6" NST Male Connection
- One (1) auxiliary intake with POU control 2.5" NST female swivel plug
 - Discharges: Four or Five (5) 4" LDH with POU control handwheel
 - QCT High-Strength Aluminum Transmission
 - Panel Mounted Controls
- Heavy-Duty Tandem Axle Trailer
 - Heavy-Duty Steel Constructed Skid Frame



SPECIAL APPLICATIONS


INDUSTRIAL FOAM PROPORTIONING SYSTEM

AQUIS™ ULTRAFLOW INDUSTRIAL FOAM PROPORTIONING SYSTEM

Waterous AQUIS™ ULTRAFLOW is a high-capacity demand based concentrate proportioning system. ULTRAFLOW is compatible with all current AFFF and non-fluorinated concentrates and utilizes magnetic flowmeters for precision concentrate to water ratio-control accurate within 2% over the full calibrated concentrate pump operating range. Electronic closed loop measurement and control of the concentrate injection rate relative to water flow provides precise concentrate to water ratios at up to sixteen (16) independent solution capable discharges.

- Controlled by TELLURUS™ Touchscreen HMI


ULTRAFLOW PERFORMANCE			
GPM	l/min	PSI	Bar
160	605	300	20.7
300	1135	300	20.7
500	1892	300	20.7

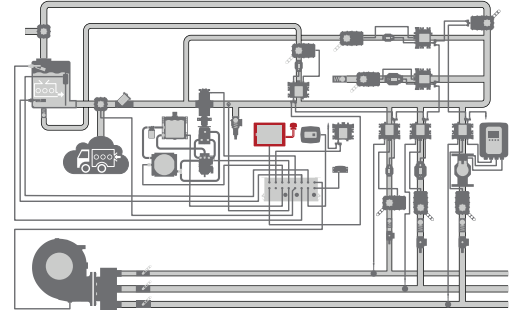

HIGH-RISE FIREFIGHTING PUMPS

CM/CGV - CMU/CGV SERIES HIGH-RISE FIREFIGHTING PUMPS

Over the past 130 years, Waterous has seen the rise of cities. With cities comes larger and taller buildings. Waterous saw the need for firefighting equipment that can be used to fight fires in those buildings. The High-Rise pump is a special pump that provides the necessary pump pressures and volume to fight fires on the upper floors of a high-Rise building. The CM/CGV and CMU/CGV pumps can operate as a stand-alone CM, CMU pump or adding the high pressure CGV pump in series provides the added performance needed to fight a high rise fire. The Waterous CMU pump also can provide High-Rise Firefighting needs by providing 600 GPM (2270 l/min) @ 600 psi (41.3 bar).

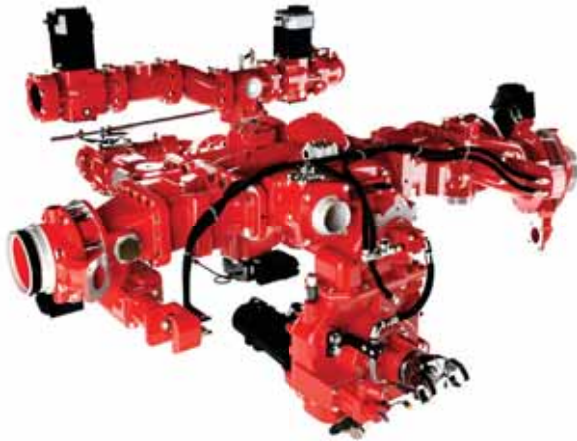

CM / CGV - CMU / CGV PERFORMANCE				
	GPM	l/min	PSI	Bar
CM STAND ALONE	750-1250	2839-4731	150	11.3
CMU STAND ALONE	1250-2250	4731-8517	150	10.3
CM/CGV	750	2839	700	48
CMU/CGV	750	2839	700	48
CMU	600	2271	600	41.3

CM / CGV - CMU / CGV PERFORMANCE				
	GPM	l/min	PSI	Bar
CM STAND ALONE	750-1250	2839-4731	150	11.3
CMU STAND ALONE	1250-2250	4731-8517	150	10.3
CM/CGV	750	2839	700	48
CMU/CGV	750	2839	700	48
CMU	600	2271	600	41.3

ARFF FIRE PUMPS

ARFF FIRE PUMPS

CPK-5



- Two-stage, ductile iron body
- Bronze replaceable wear ring
- Bronze impellers
- Self-adjusting mechanical seal
- 3-inch NPT intake
- 1.5-inch ANSI flanged discharge
- Extra Heavy Duty K Transmission

CPK-5 PERFORMANCE

GPM	l/min	l/sec	PSI	Bar	kPa	MPa
320	1211	20	1350	93	9300	9.3

ARFF FIRE PUMPS

CR / CRU



- Gray iron (bronze optional), vertically-split volute body
- 17-4 stainless steel impeller shaft
- Oil-splash lubricated ball bearings
- Bronze replaceable wear rings
- Fully-enclosed, bronze, double-hubbed precision-balanced impeller

CR / CRU / CRU-1 / CRU-2 PERFORMANCE

	GPM	l/min	l/sec	PSI	Bar	kPa	MPa
CR	2050	7760	129	250	17	1700	1.7
CRU	2640	9993	165	250	17	1700	1.7
CRU-1	3000	11356	189	100	6.8	680	0.68
CRU-2	4000	15141	252	100	6.9	690	0.69

ARFF FIRE PUMPS

CZ / CZU



- High-tensile gray iron (bronze optional), vertically-split casing
- 17-4 stainless steel impeller shaft
- Oil-splash lubricated ball bearings
- Fully-enclosed, bronze, double-hubbed precision-balanced impeller
- Bronze replaceable wear rings

CZ / CZU PERFORMANCE

	GPM	l/min	l/sec	PSI	Bar	kPa	MPa
CZ	950	3600	60	260	18	1800	1.8
CZU	1500	5678	95	250	17	1700	1.7

ARFF FIRE PUMPS

CPT-4UHP Ultra High Pressure



This ultra high-pressure performer is a lightweight four-stage centrifugal pump that delivers 90 GPM (350 l/min) at 1350 PSI (93 bar) to produce high-pressure fog, which can knock out fires quickly while the pumper is either in motion or stationary.

- Two-piece, horizontally-split gray iron body
- Ni-Resist wear rings to reduce internal leakage
- Bronze impellers
- Braided Flexible Graphite Packing
- Direct-Engine Mounted with SAE Bellhousing

CPT-4UHP PERFORMANCE

GPM	l/min	l/sec	PSI	Bar	kPa	MPa
90	340	5.7	1350	93	9300	9.3

ARFF FIRE PUMPS

CXK / CXPA - CXSK / CXSPA

See page 10 for description and picture.

PORTABLE AND MOTOR PUMPS

TAKE THE FIGHT TO THE FIRE.

The Waterous PB18 Series features four models. Each PB18 is equipped with a Briggs & Stratton 18hp (15kw) V-Twin gasoline engine with a 9 qt (9.5L) top mounted fuel tank.

Options: Rail Base, No Base, Wrap-Around Base, operator's panel, exhaust primer, mast light. NOTE: Wrap-Around models are CE marked.

PORTABLE AND MOTOR PUMPS

PB18-SERIES

PB18-2515	GPM	l/min	l/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	150	567	9.5	90	6.5	650	0.65
MAXIMUM PRESSURE	75	284	4.7	135	9.3	930	0.93

- 133 lbs. (60.5 kg)

PB18-3030	GPM	l/min	l/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	400	1514	25.2	15	1	100	0.1
MAXIMUM PRESSURE	100	378	6.3	110	7.6	760	0.76

- 135 lbs. (61.2 kg)

PB18-G2015	GPM	l/min	l/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	75	284	4.7	190	13	1300	1.3
MAXIMUM PRESSURE	20	75	1.25	320	22	2200	2.2

- 152.5 lbs. (64.6 kg)

PB18-4025B	GPM	l/min	l/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	250	946	15.7	70	4.8	480	0.48
MAXIMUM PRESSURE	150	567	9.5	90	6.5	650	0.65

- 143 lbs. (65.0 kg)



Wrap-Around Base Shown

PORTABLE AND MOTOR PUMPS

E501-C / E511-C

The E500 Series Motor Pump is specifically designed for mounting on specialized attack vehicles. Equipped with Kubota 899cc diesel engine and Waterous fire pump. Available in two models: E501 or E511:



E501-C	GPM	l/min	l/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	110	416	6.9	100	7	700	0.7
MAXIMUM PRESSURE	50	189	3.2	400	28	2800	2.8

E511-C	GPM	l/min	l/sec	PSI	Bar	kPa	MPa
MAXIMUM FLOW	275	1041	17.4	50	3.5	350	.35
MAXIMUM PRESSURE	100	378	6.3	190	13	1300	1.3

FIRE PUMP ACCESSORIES



DISCHARGE VALVES

- Chromium-plated bronze valve ball
- Spring-loaded floating seal assembly
- Multi-purpose drain port
- Manual, push/pull, twist lock (2.5") mechanism with panel-mounted "T" handle lock
- Optional electric actuator complies with NFPA requirements for slow actuation

VENTURIS™ AIR PRIMER

- All Brass Body Construction
- No Maintenance Required - No Y-Strainers or Mesh Screens to Clean
- Automatic Draining
- Pump Mounted
- Meets or Exceeds NFPA 1901 Vacuum and Priming Standards
- Manual Prime, Auto-Prime and Multiple Prime Systems
- Low Amp Draw Compared to Other Priming Systems
- Auto-Prime Option: System Automatically Primes when Discharge Pressure Is Below 10 PSI



OVERHEAT PROTECTION MANAGER

- Opens when water inside the pump reaches 140° F (60° C)
- Flashing warning light on pump panel is triggered when water reaches 180° F (82° C)
- Water is released to ground



MONARCH™ INTAKE VALVE

- Manual, electric or pneumatic operation
- Stainless steel Wafer-Sphere® element
- Polymeric flexible lip seal
- Provision for pre-butterfly relief valve



ELECTRIC PRIMING PUMPS

- VPO oil-free primer
- Fast, dependable priming
- Electrically driven
- Operates independently from the pump
- Lubrication option (requires priming tank)



INTAKE RELIEF VALVE

- Corrosion resistant materials used in all critical areas
- No scheduled service needed.
- Smooth turning adjustment knob.
- Calibrated from 50 psi to 250 psi.
- Valve mounted at factory or separately mounted



PRIMING VALVES

- Vacuum Activated Priming (VAP) Valve
- Stainless steel valve stem
- Opens automatically during pump priming
- Closes automatically when primer is deactivated



PNEUMATIC SHIFT

- Spring-loaded locking control
- Dual-action cylinder



TOP 10 REASONS TO CHOOSE WATEROUS.

1 - AMERICAN MADE

We can proudly say we build our pumps in the USA using USA content and advanced engineering.



6 - RELIABILITY AND INDUSTRY STANDING

Waterous is in 8 of the top 10 largest fire departments in North America. Applying over 138 years of manufacturing capabilities in North America.



2 - FLAME-PLATED IMPELLER HUBS AND LABRYINTH-STYLE WEAR RINGS

Flame-plating, a Waterous exclusive, provides four times the life expectancy compared to the competition. Labryinth-style wear rings appreciably reduce performance-robbing recirculation.



7 - BEST IN CLASS SERVICE & SUPPORT

Experienced sales, technical and manufacturing staff bring you trusted service and support. Our highly trained global network of sales, engineering and service support helps your department get the most out of your Waterous fire suppression equipment.

3 - CHAIN-DRIVE PUMP TRANSMISSION

Best In-Class Power Transfer. Quiet, efficient and strong characteristics make the chain-drive pump transmission the best option in power transfer. Positive shifting, no gear whining, no cooling required and less horsepower required that enhances the efficiency of the apparatus.



8 - ACCURATE AND TIMELY

On time and accurate parts orders (95% on-time delivery and a 99% order accuracy rate). All products are serialized. We have a record of every pump we've ever built.



4 - DESIGN FEATURES

A separable impeller shaft provides easier maintenance, and O-rings offer easier replacement. Sealed outboard bearings require no maintenance and the product features timely parts availability (see #8), comprehensive maintenance instructions and a parts list.



9 - CAPABILITIES

Waterous has a 210,000 sq. ft. facility with 25 CNC machines and a union workforce with an average of 25 of years experience. We have 10 product engineers. We have reinvested over millions of dollars in capital investments over the last several years.



5 - PRODUCTS

Offering pumps, CAFS and foam systems, we provide the most comprehensive product offerings in the industry.



10 - ISO 9001 CERTIFIED COMPANY

Our entire facility and manufacturing processes meet or exceed ISO standards and compliance requirements. This means we deliver nothing but the most trustworthy, effective and advanced fire suppression equipment to firefighters worldwide.





WORLDWIDE

With customers in Europe, North and South America, the Middle East, Asia, Australia, and Africa, Waterous continues to serve the needs of the global fire industry with unmatched service and customer care. Call Waterous today and discover the force behind the fight.

CORPORATE HEADQUARTERS

125 HARDMAN AVE SOUTH, SOUTH SAINT PAUL, MINNESOTA USA 55075-1191

+1-651-450-5000 www.waterousco.com