



Dimensional Drawings for 3 Inch Discharge Relief Valves


Pump Model	Pump Material	Valve Mounting	See Page
CXS, CXV	Iron	On Pump	2
CM, CMH, CS, CSH	Bronze	On Pump	3
CM, CMH, CS, CSH, CXS, CXN, CXV, CZ	Iron or Bronze	Separately Mounted	4, 5
All	--	Pilot Valves	6, 7

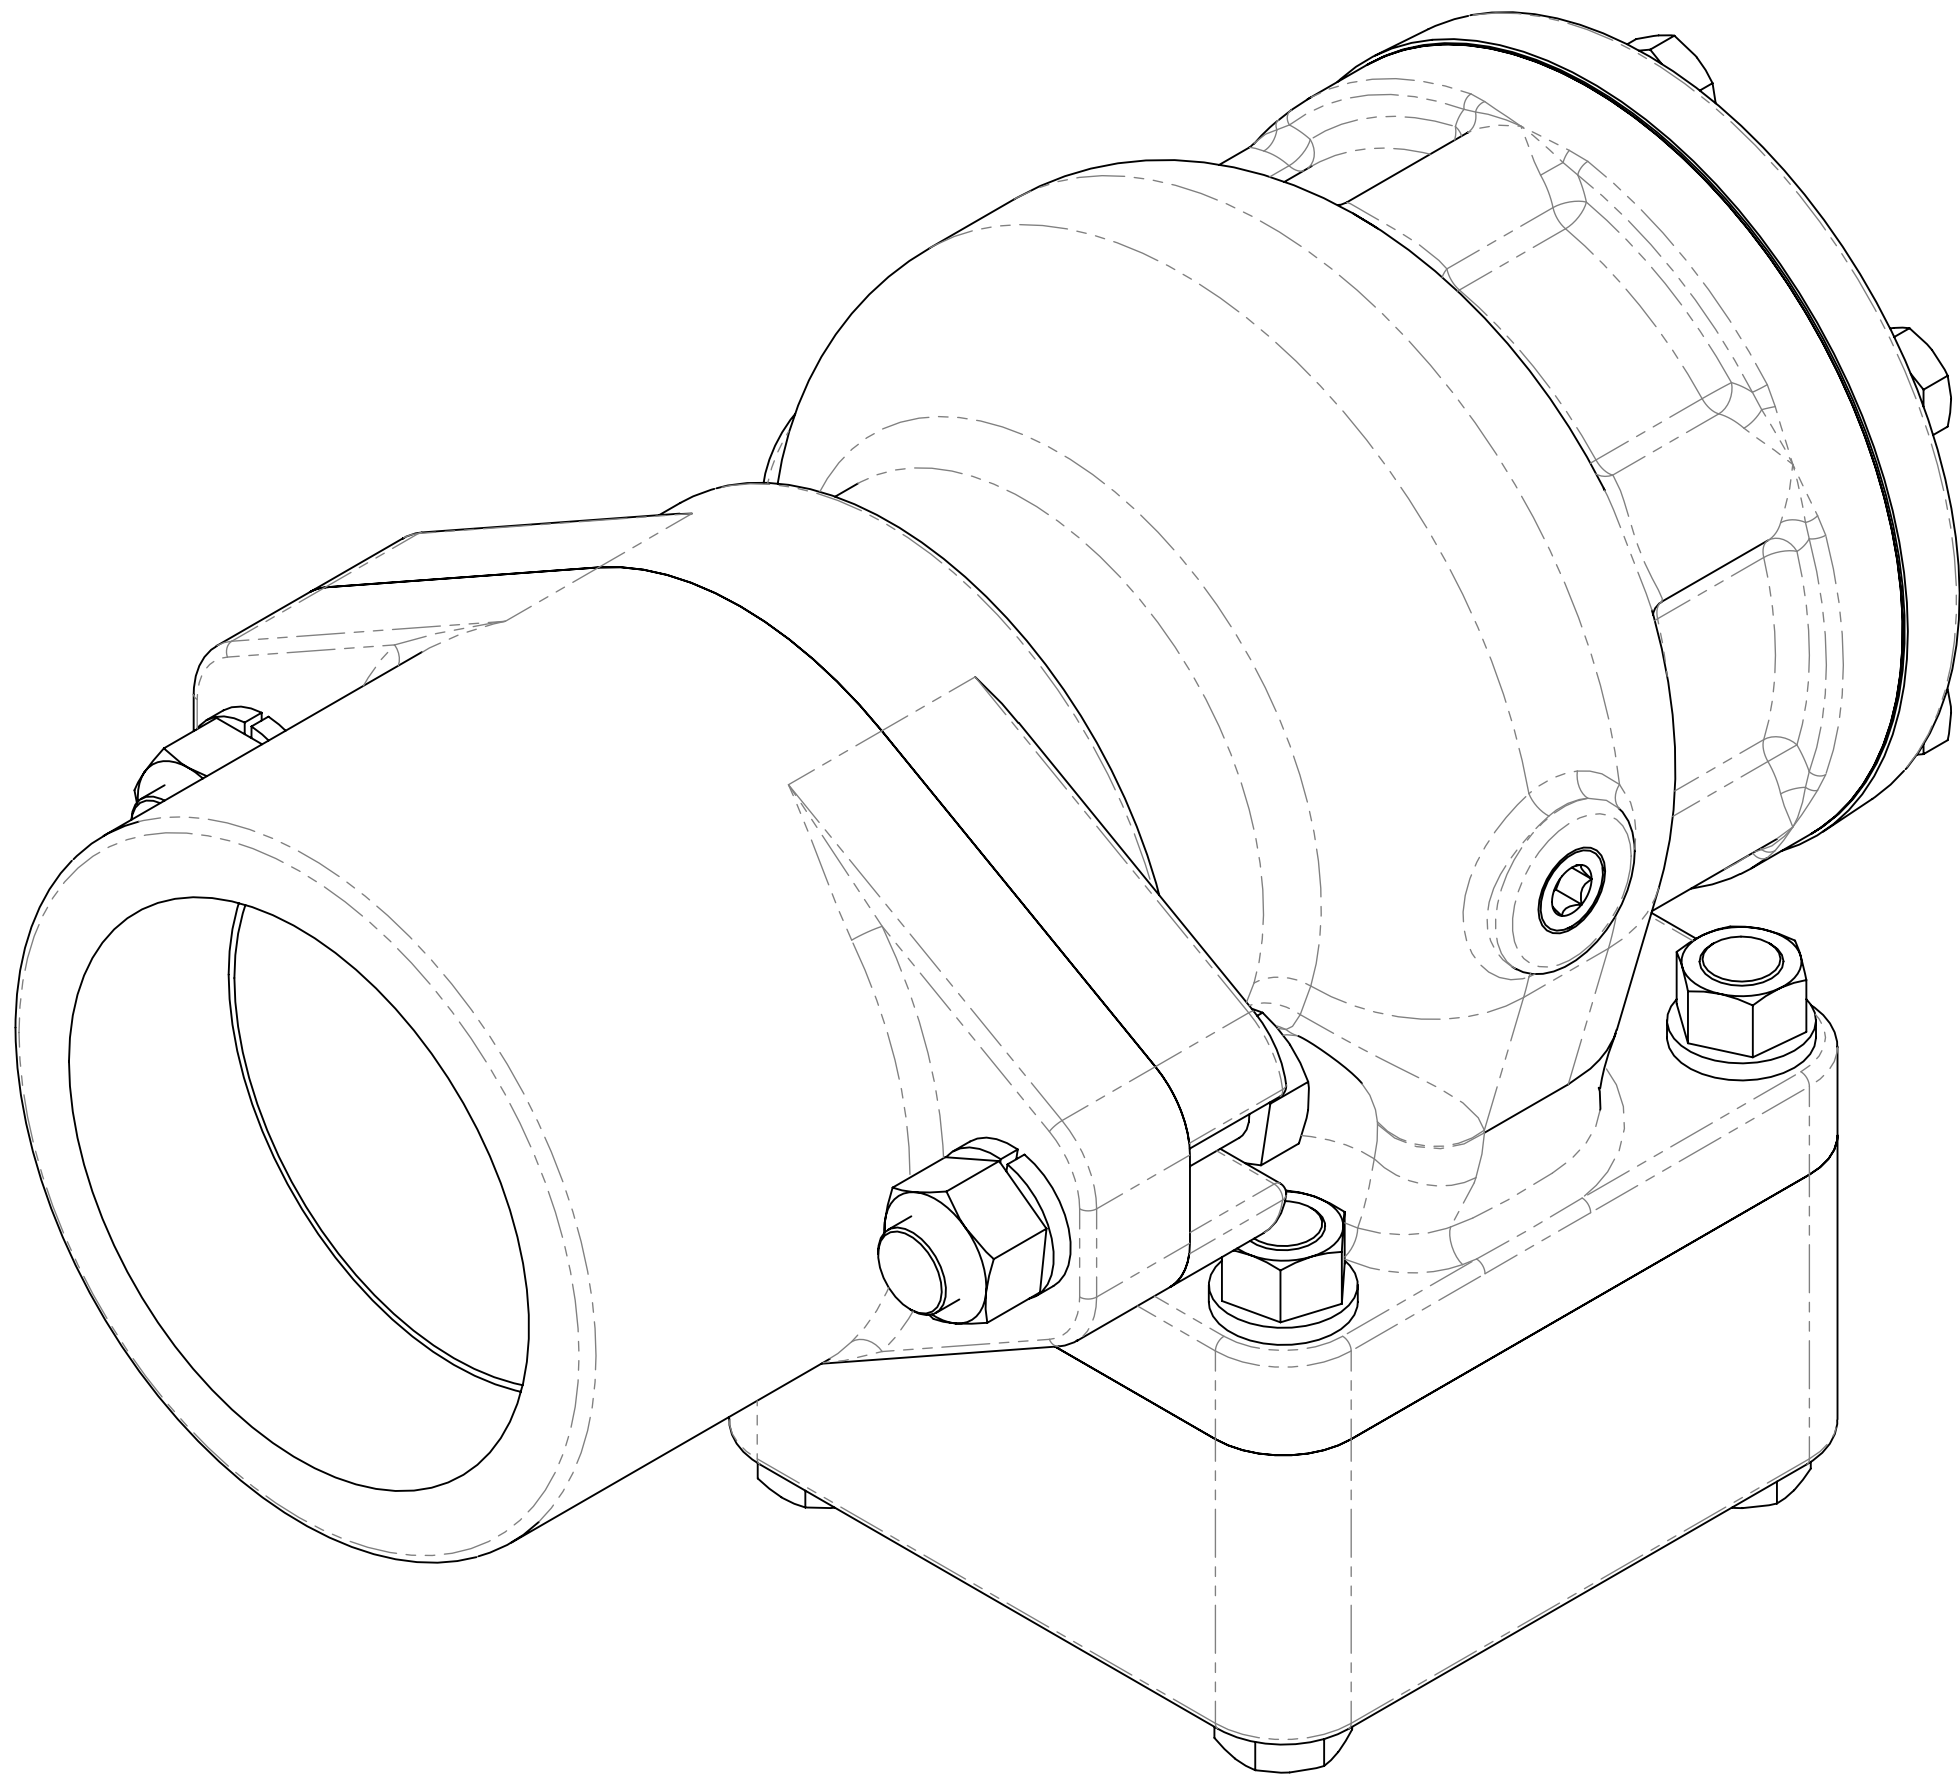

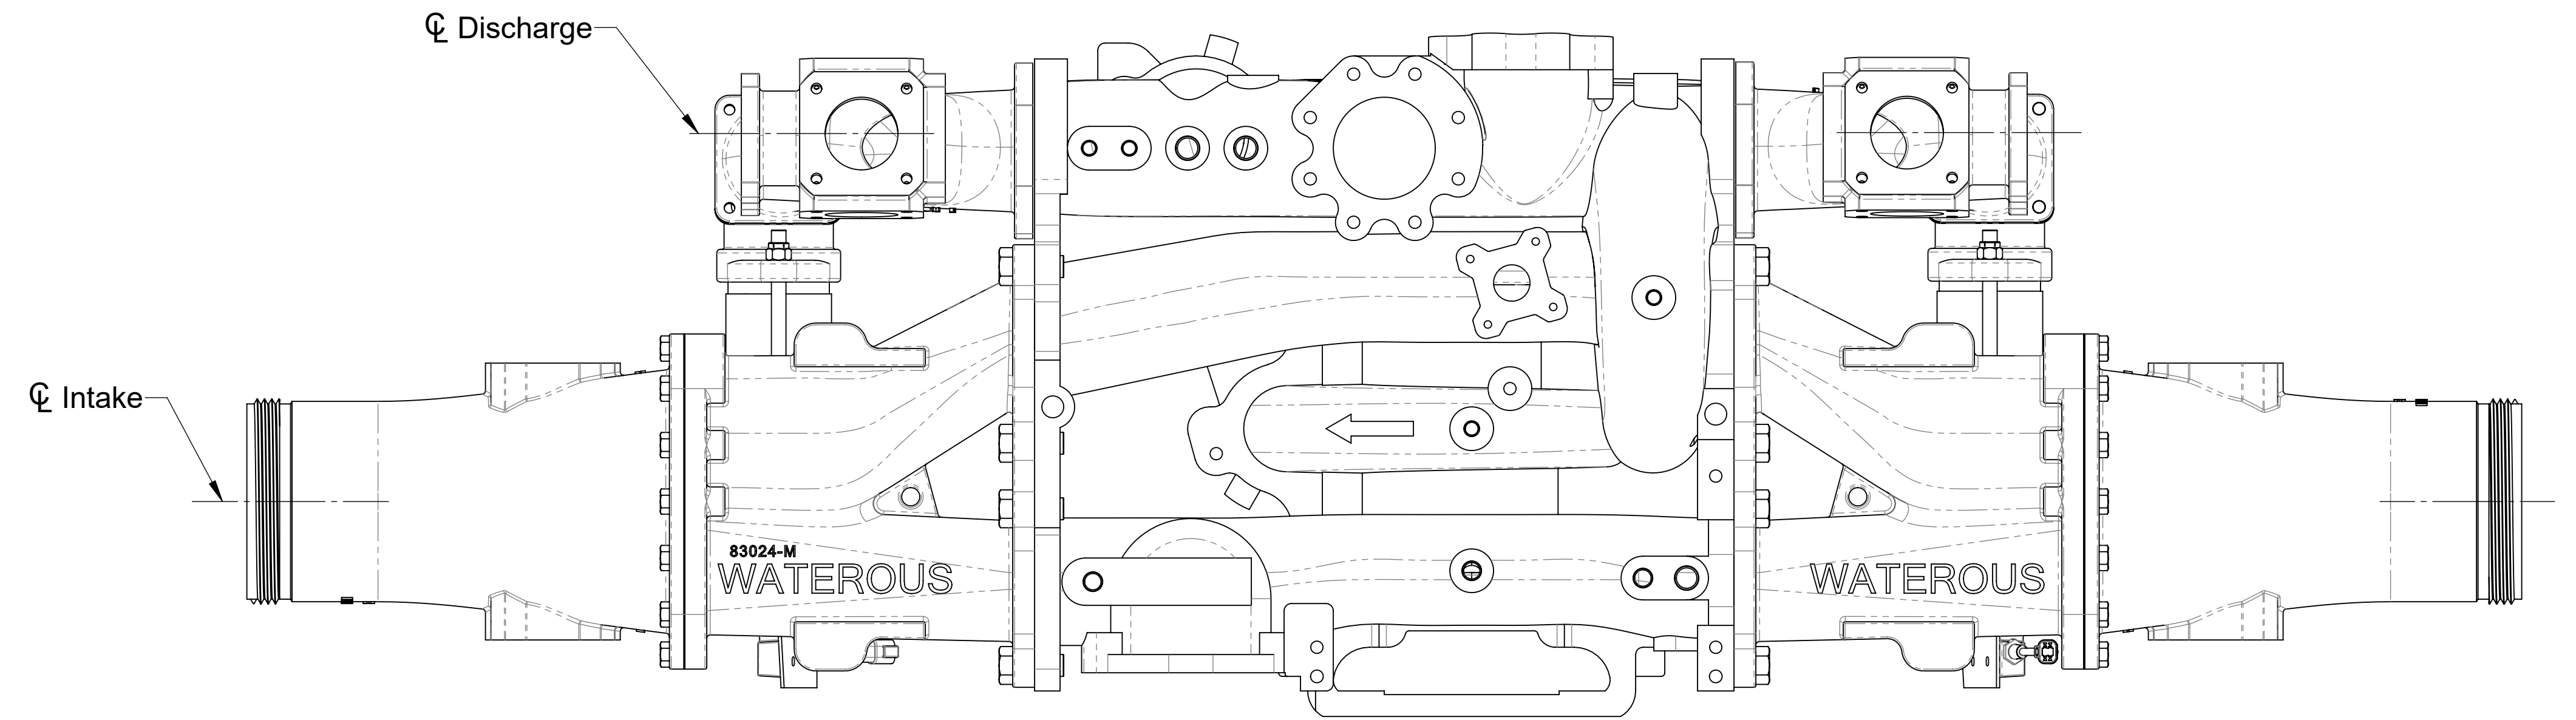



Left Side Mounting

Right Side Mounting

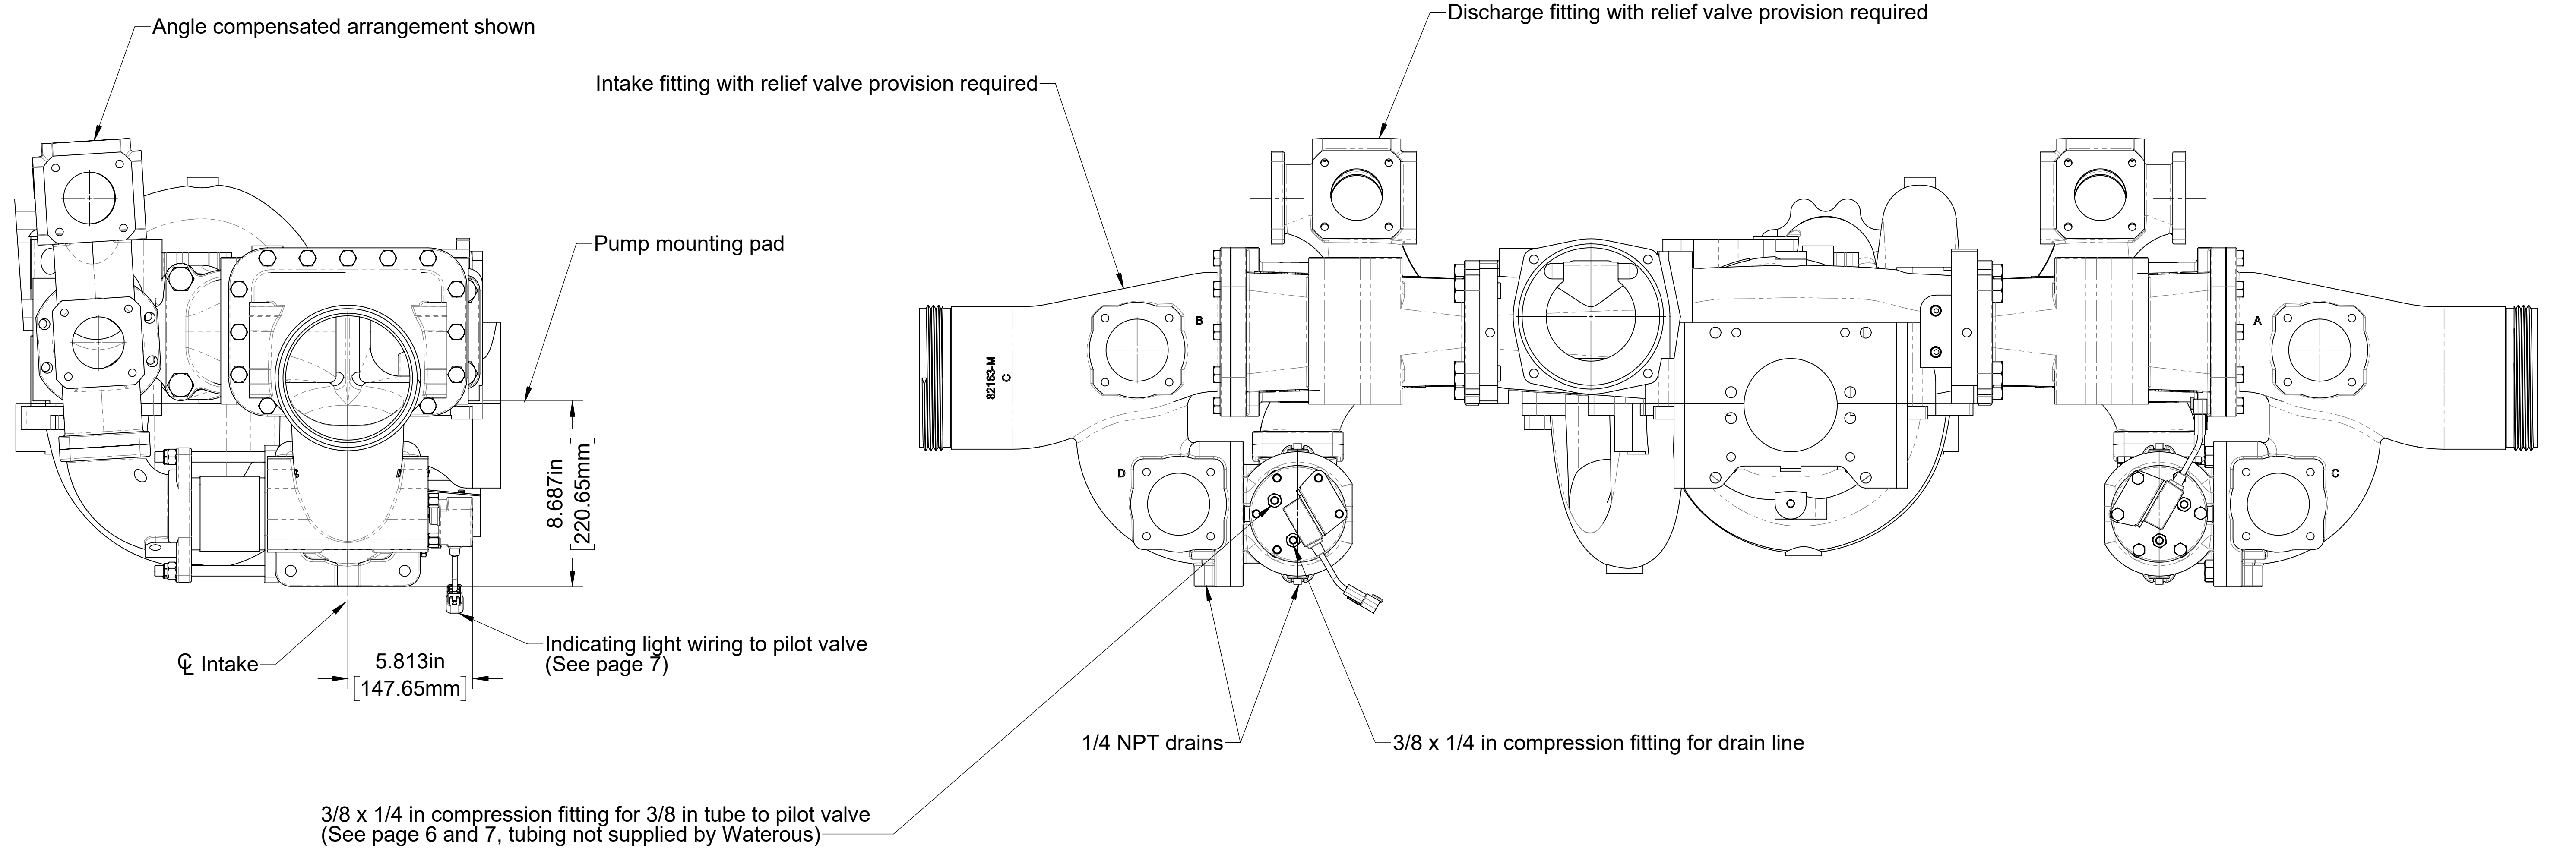


3 in Pump Mounted Relief Valves for CM, CMH, CS and CSH Pump Models

(Bronze pumps only)

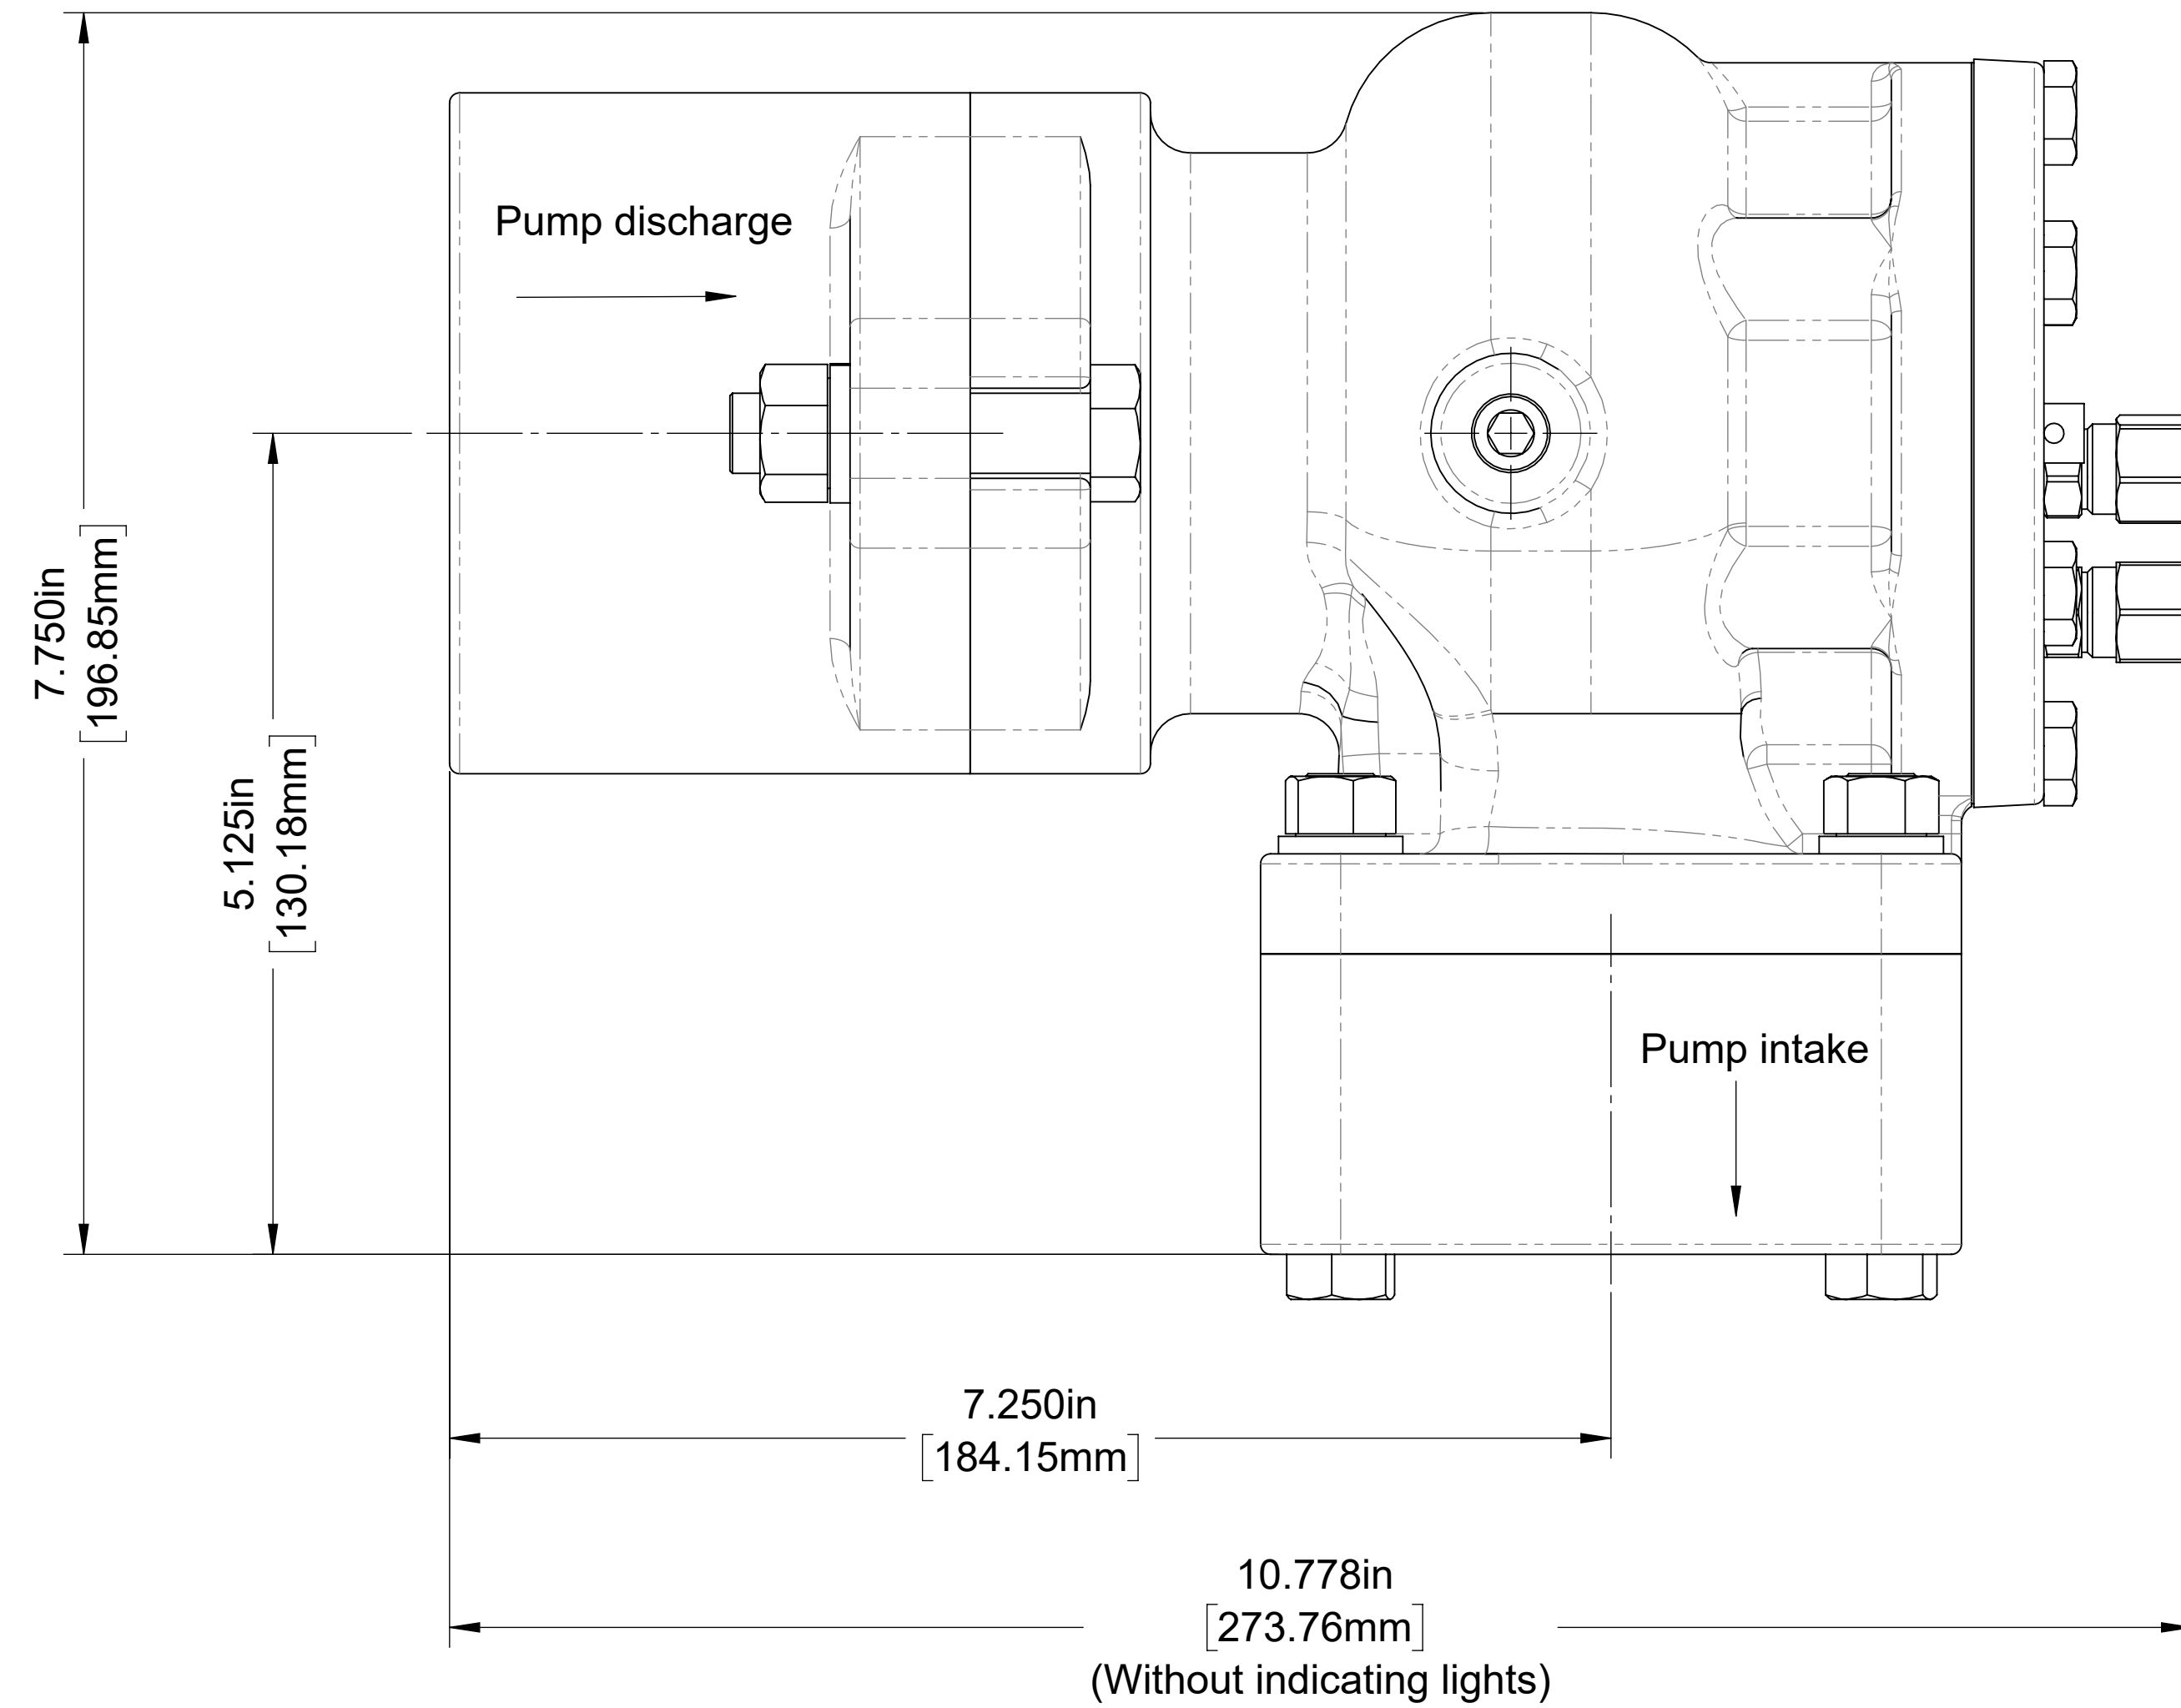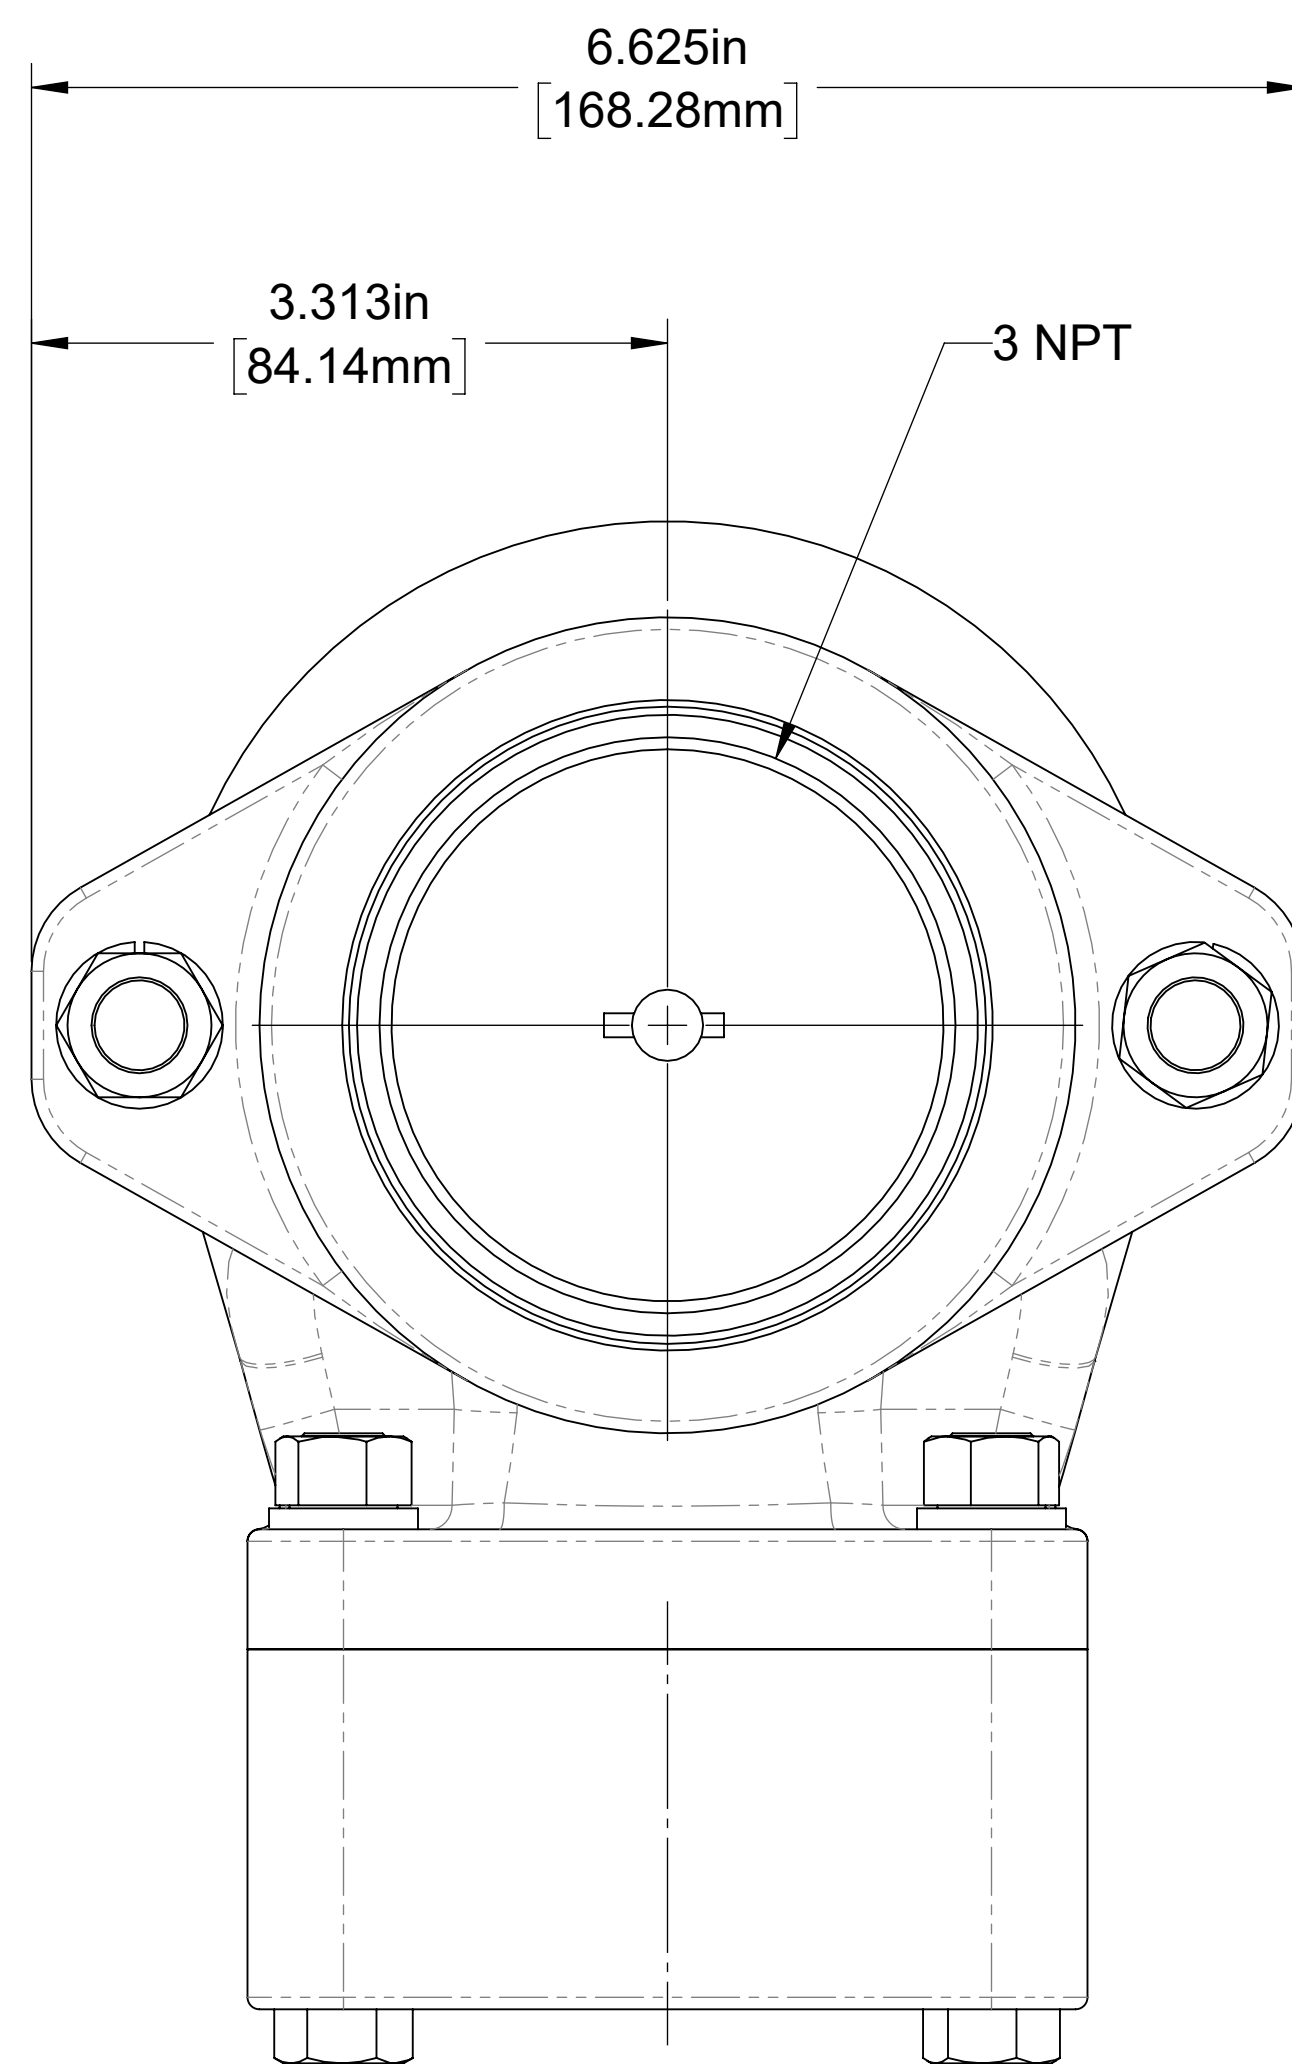




Effective 1/19/97:
Wiring to point upward only for right hand mounting configurations.

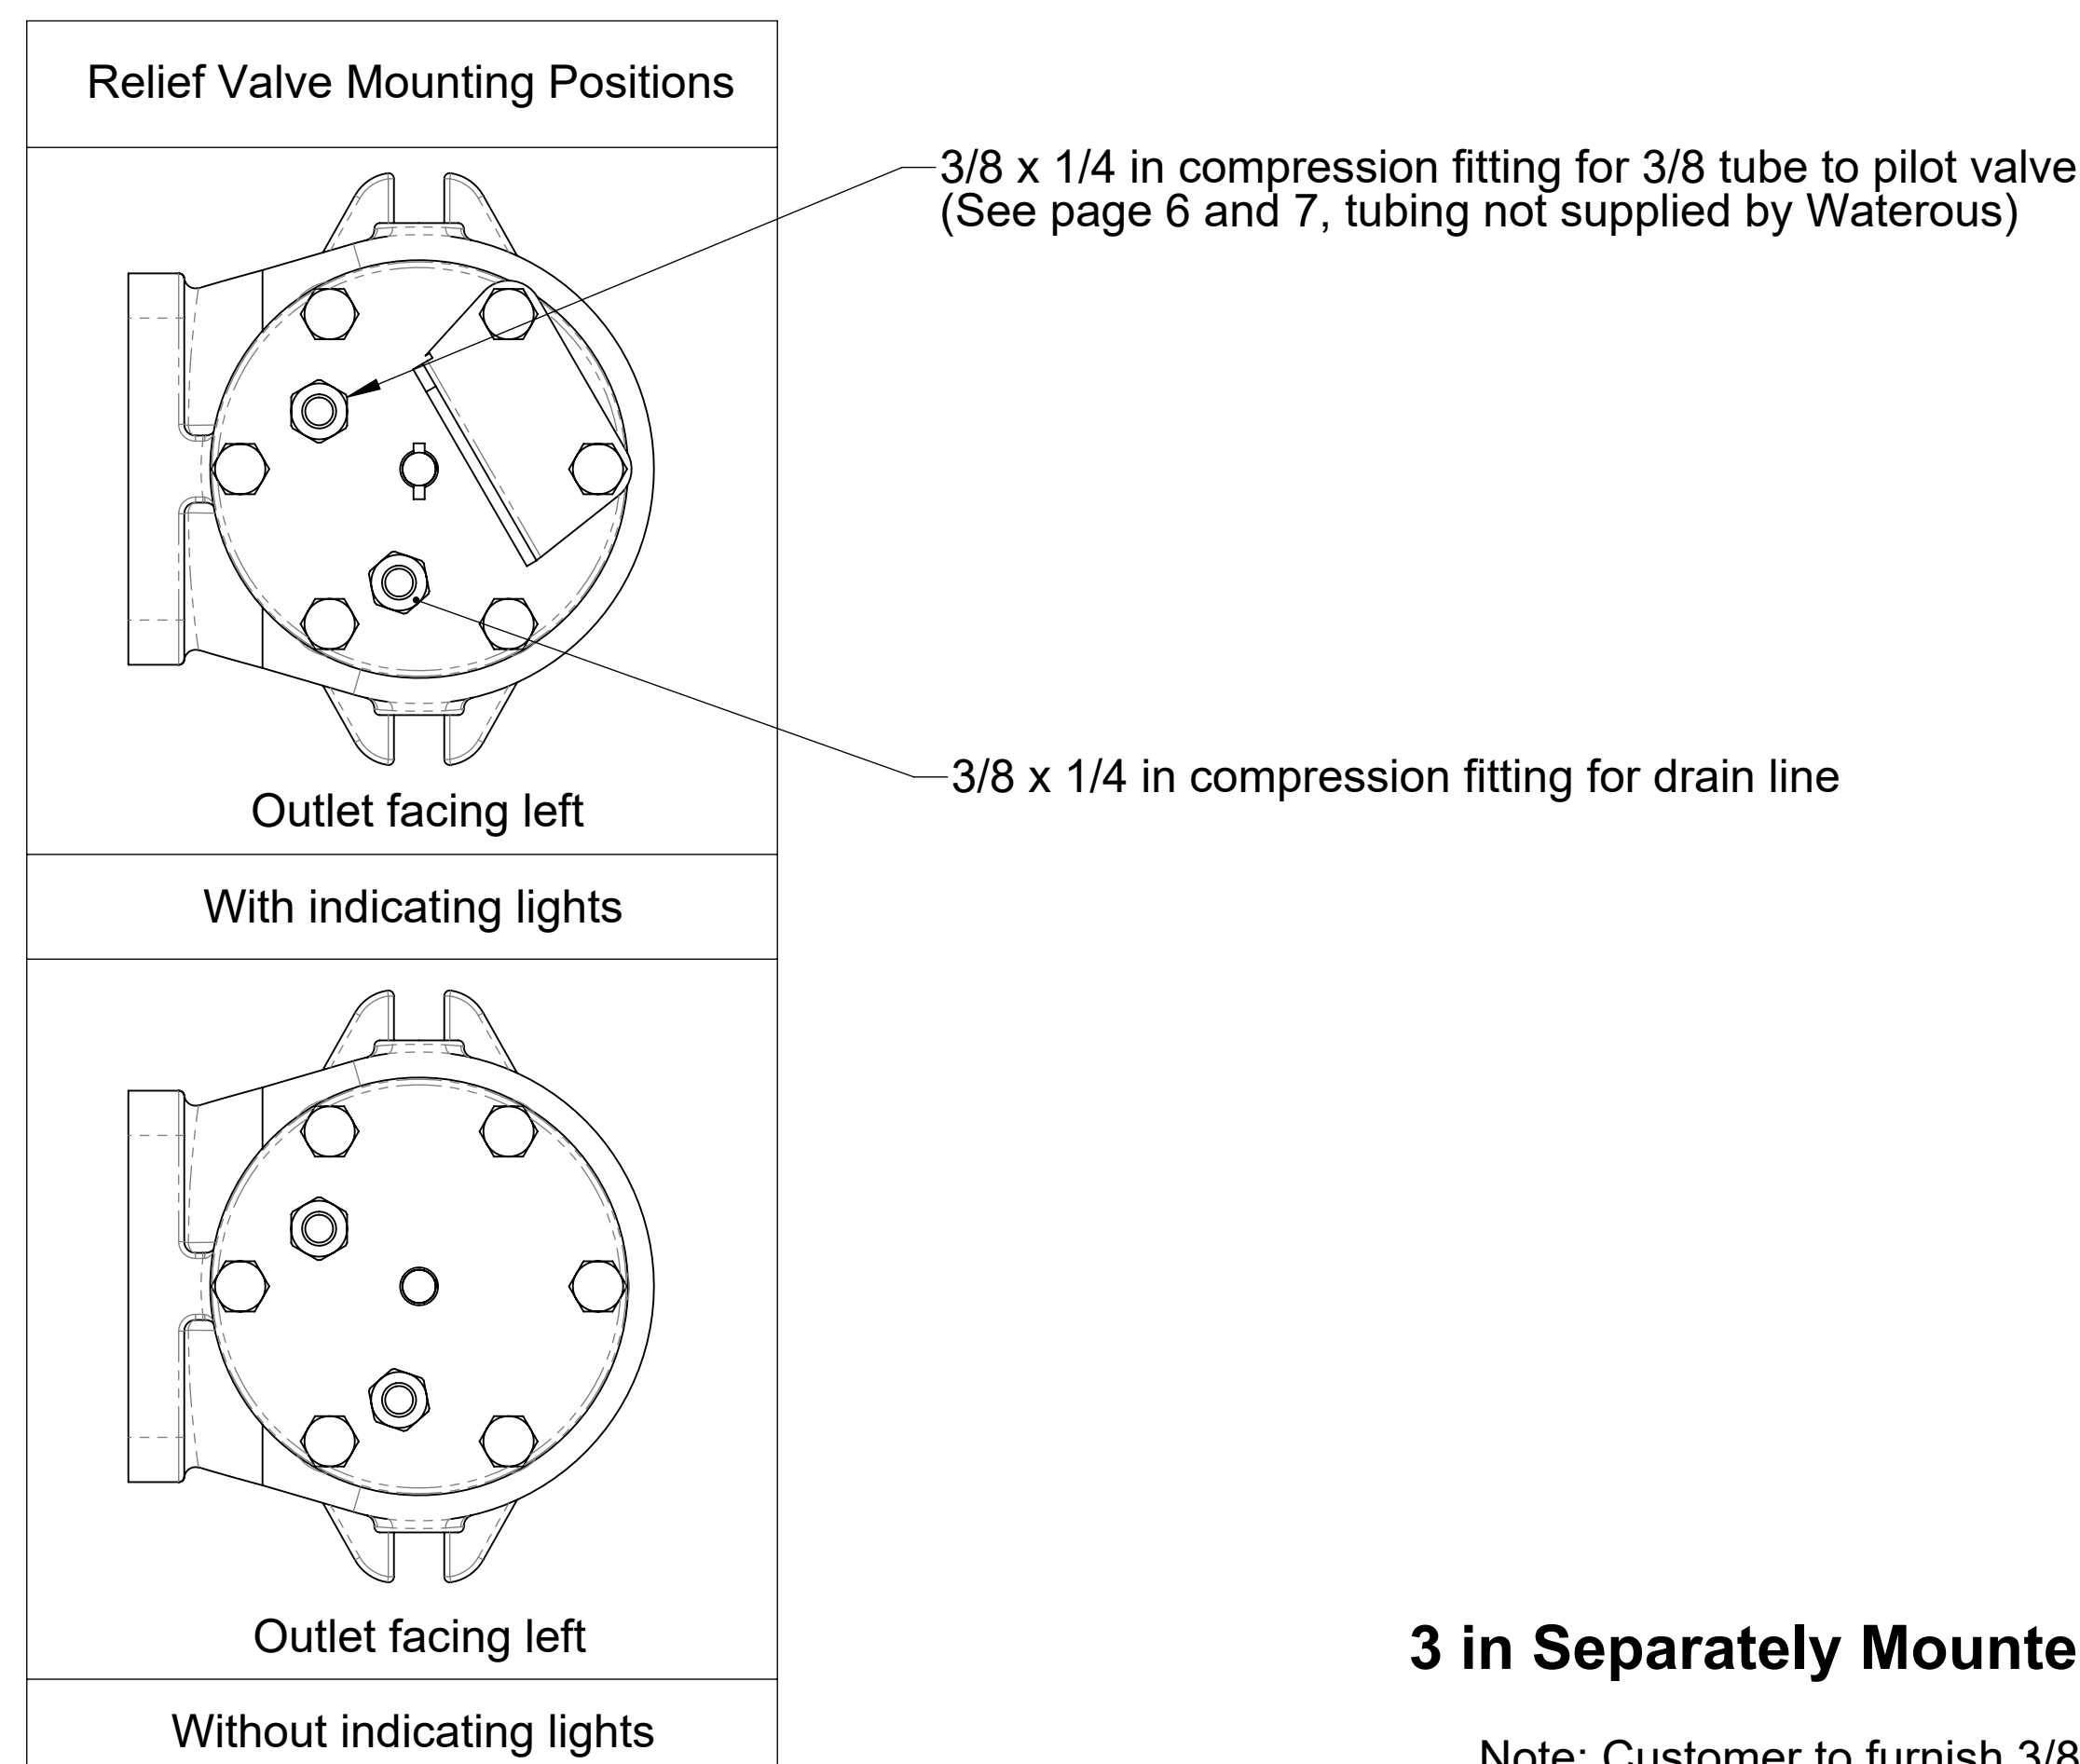



3 in Separately Mounted Relief Valves with 3 in Tapped Flange Connections

Note: Customer to furnish 3/8 in tubing to pilot valve and furnish piping to discharge and pump intake.

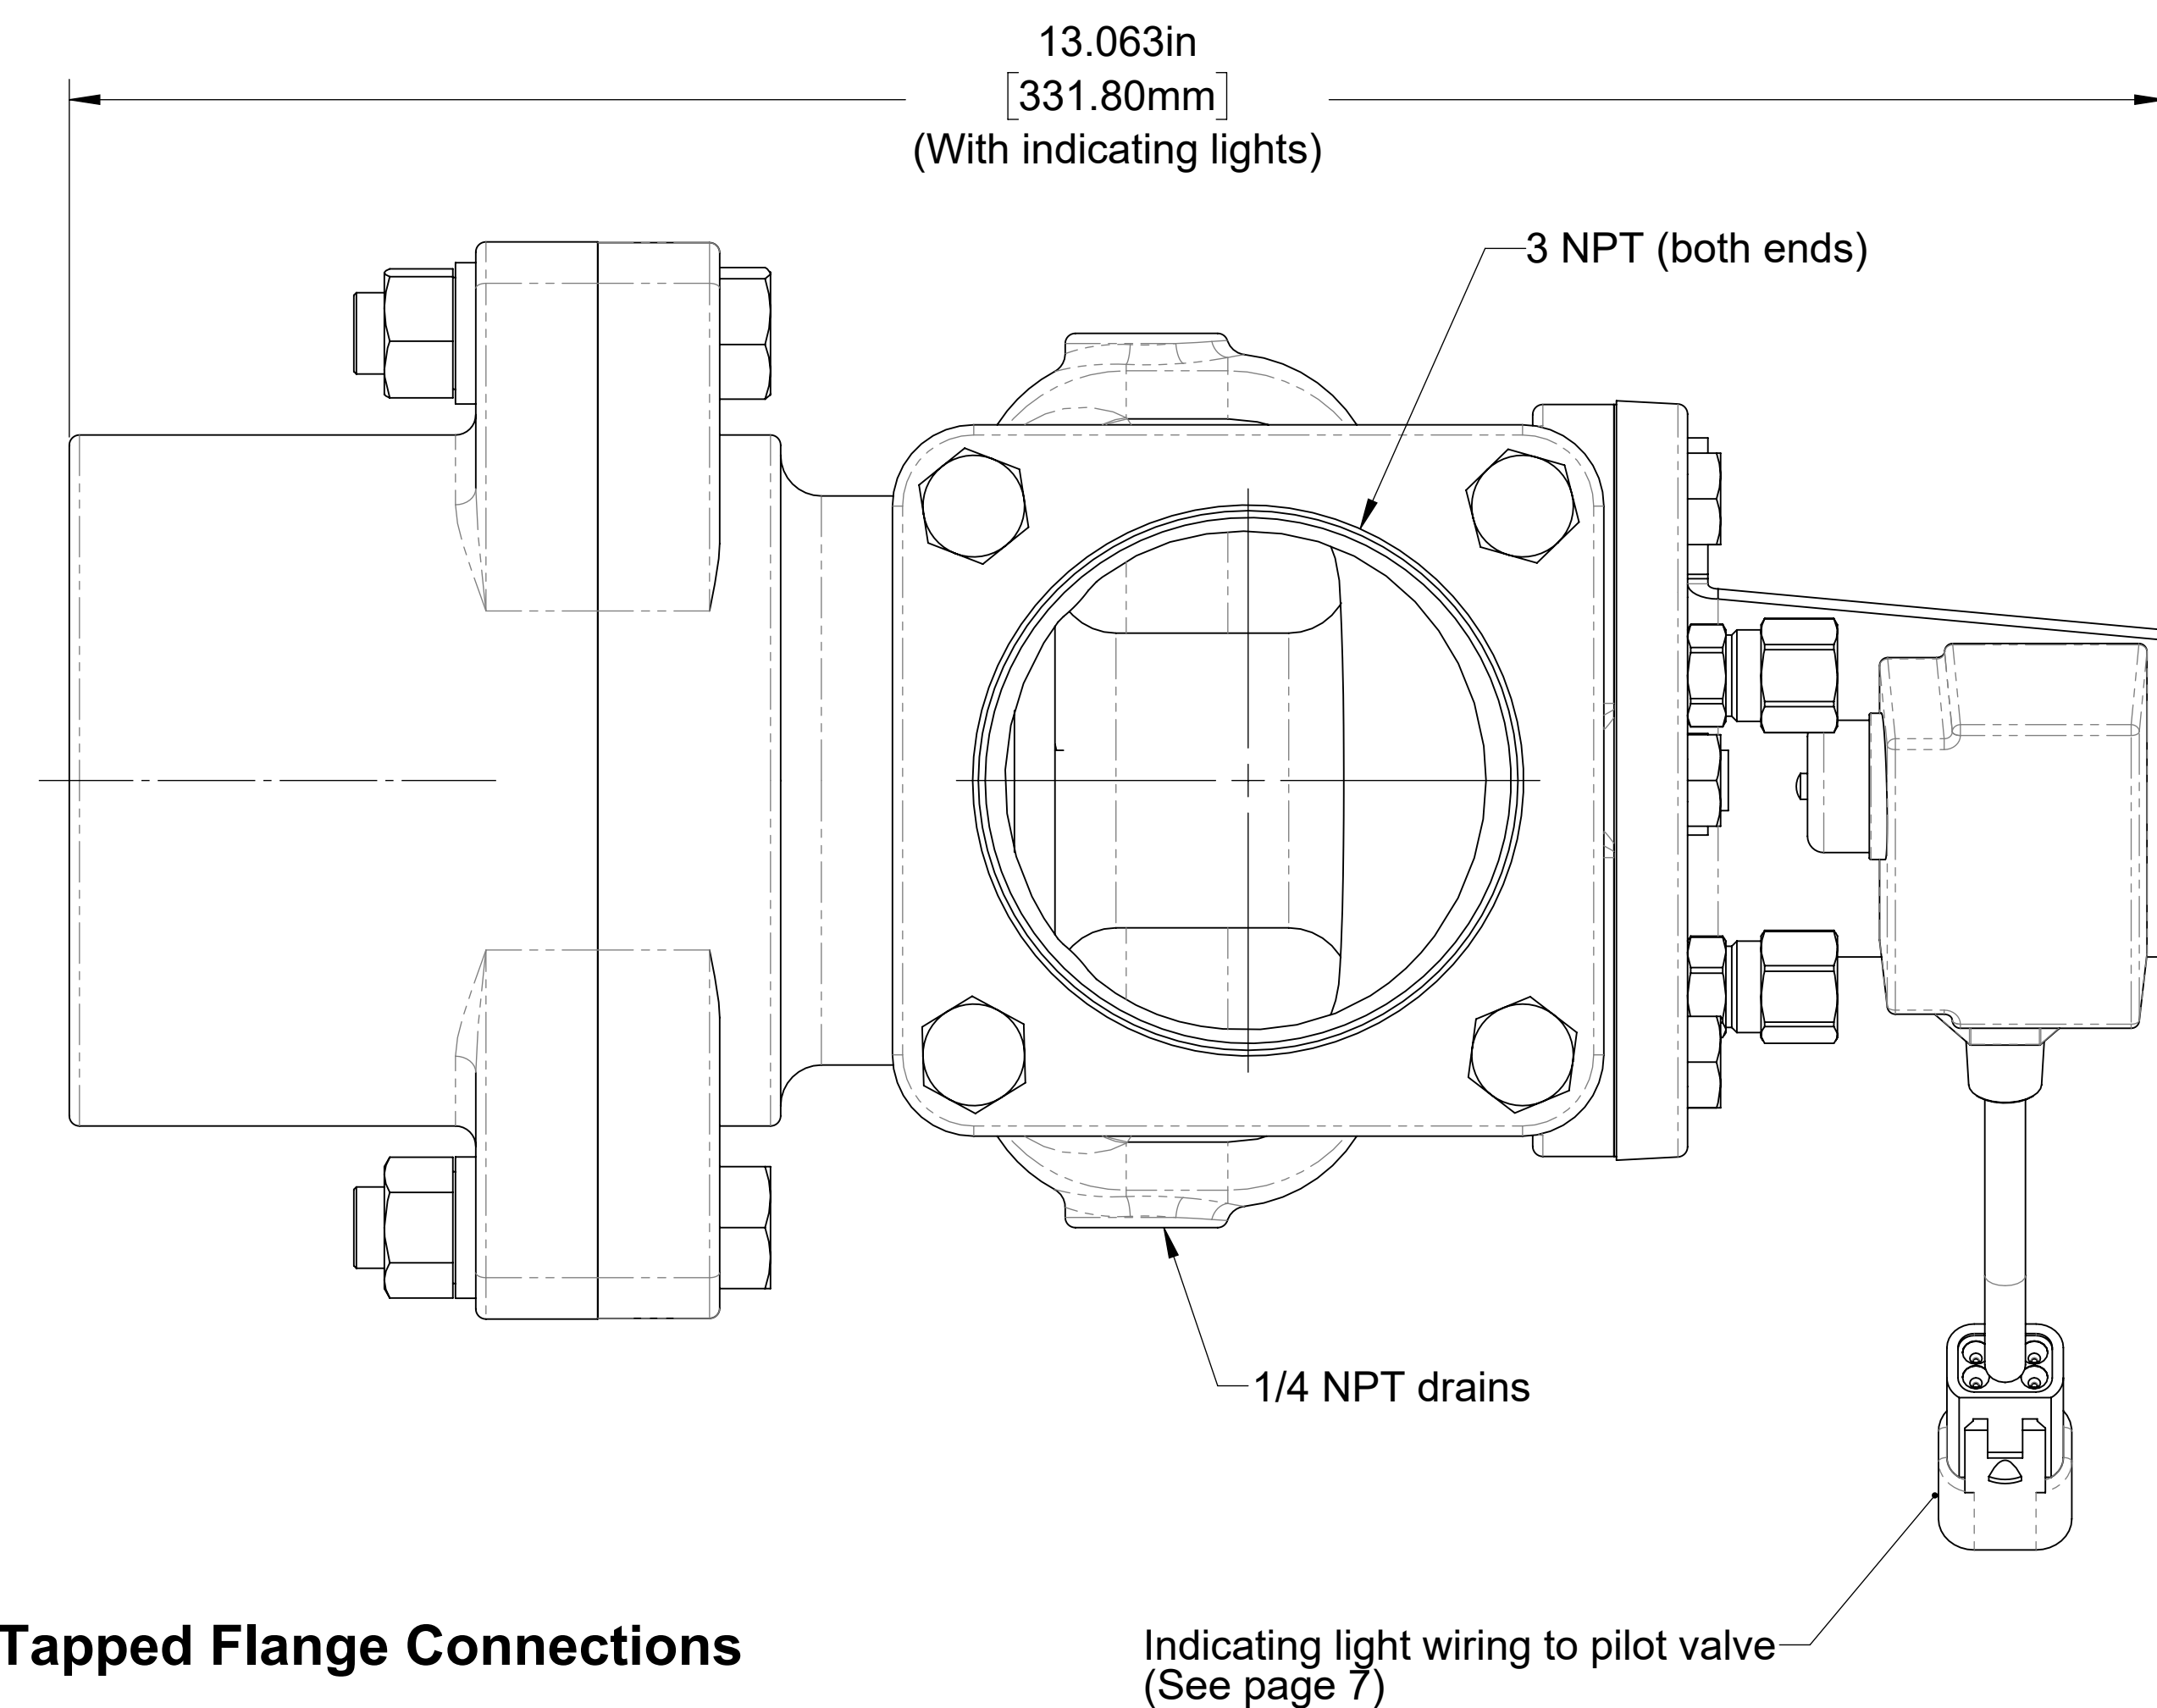

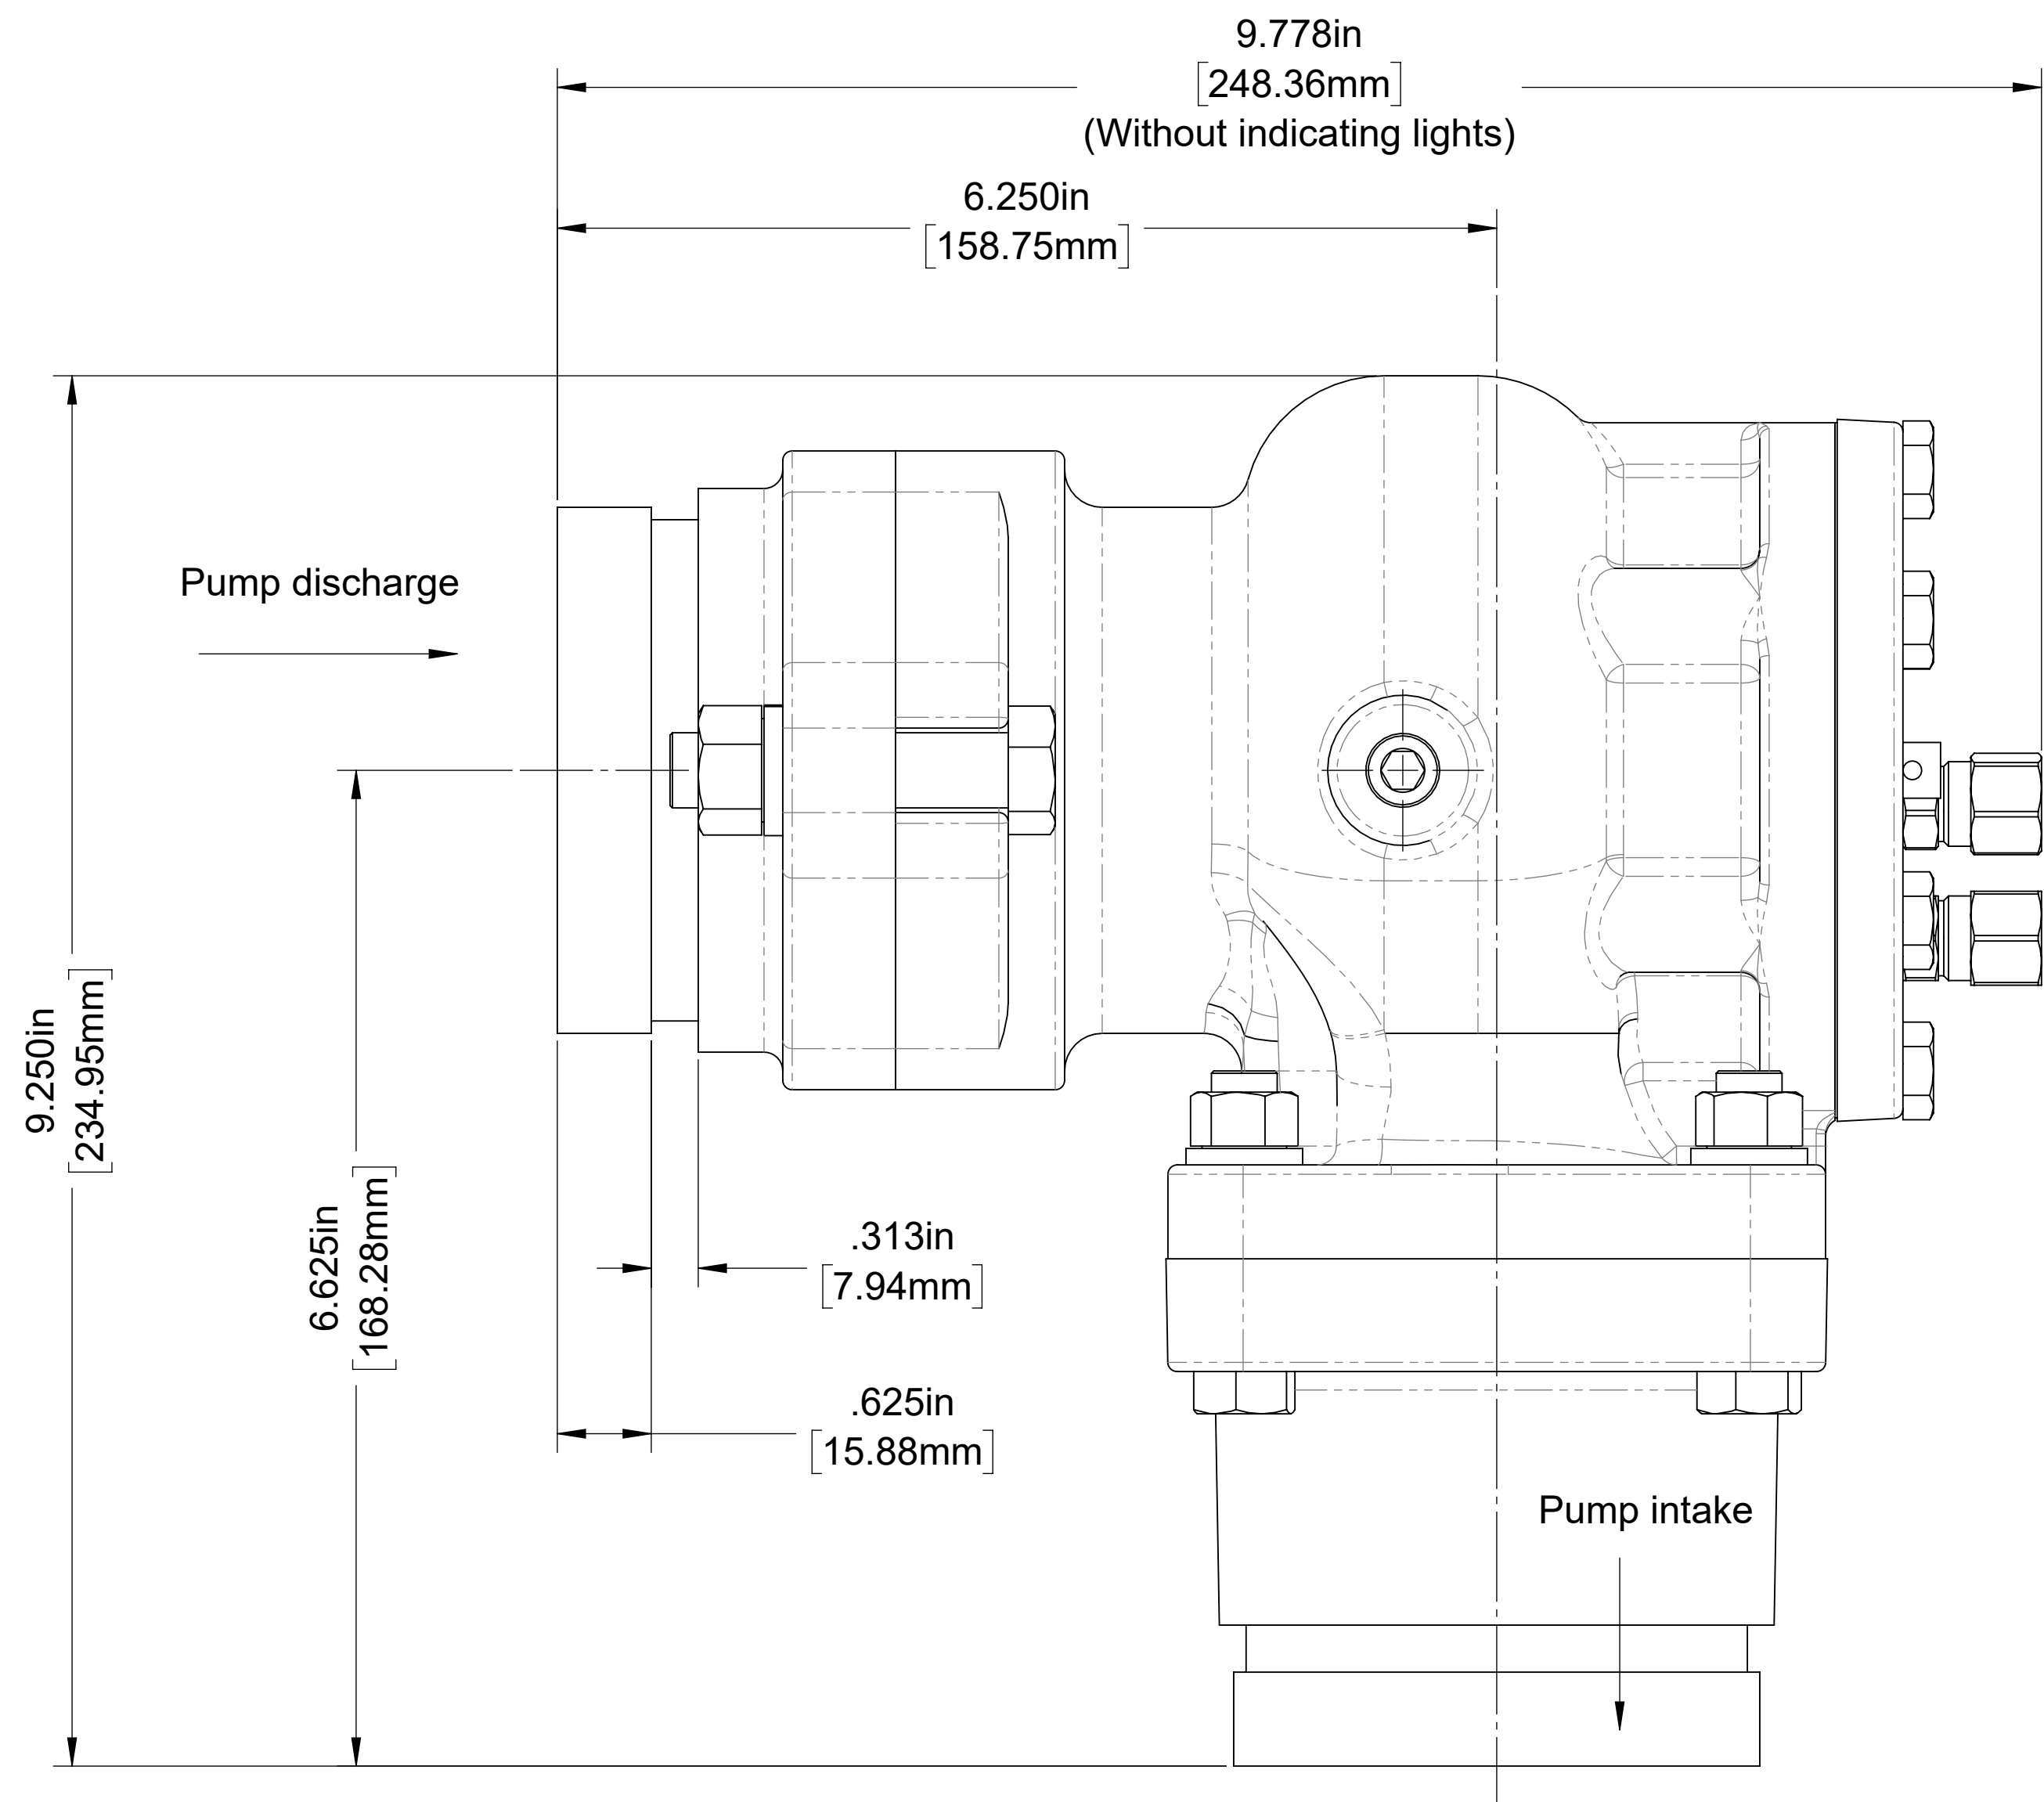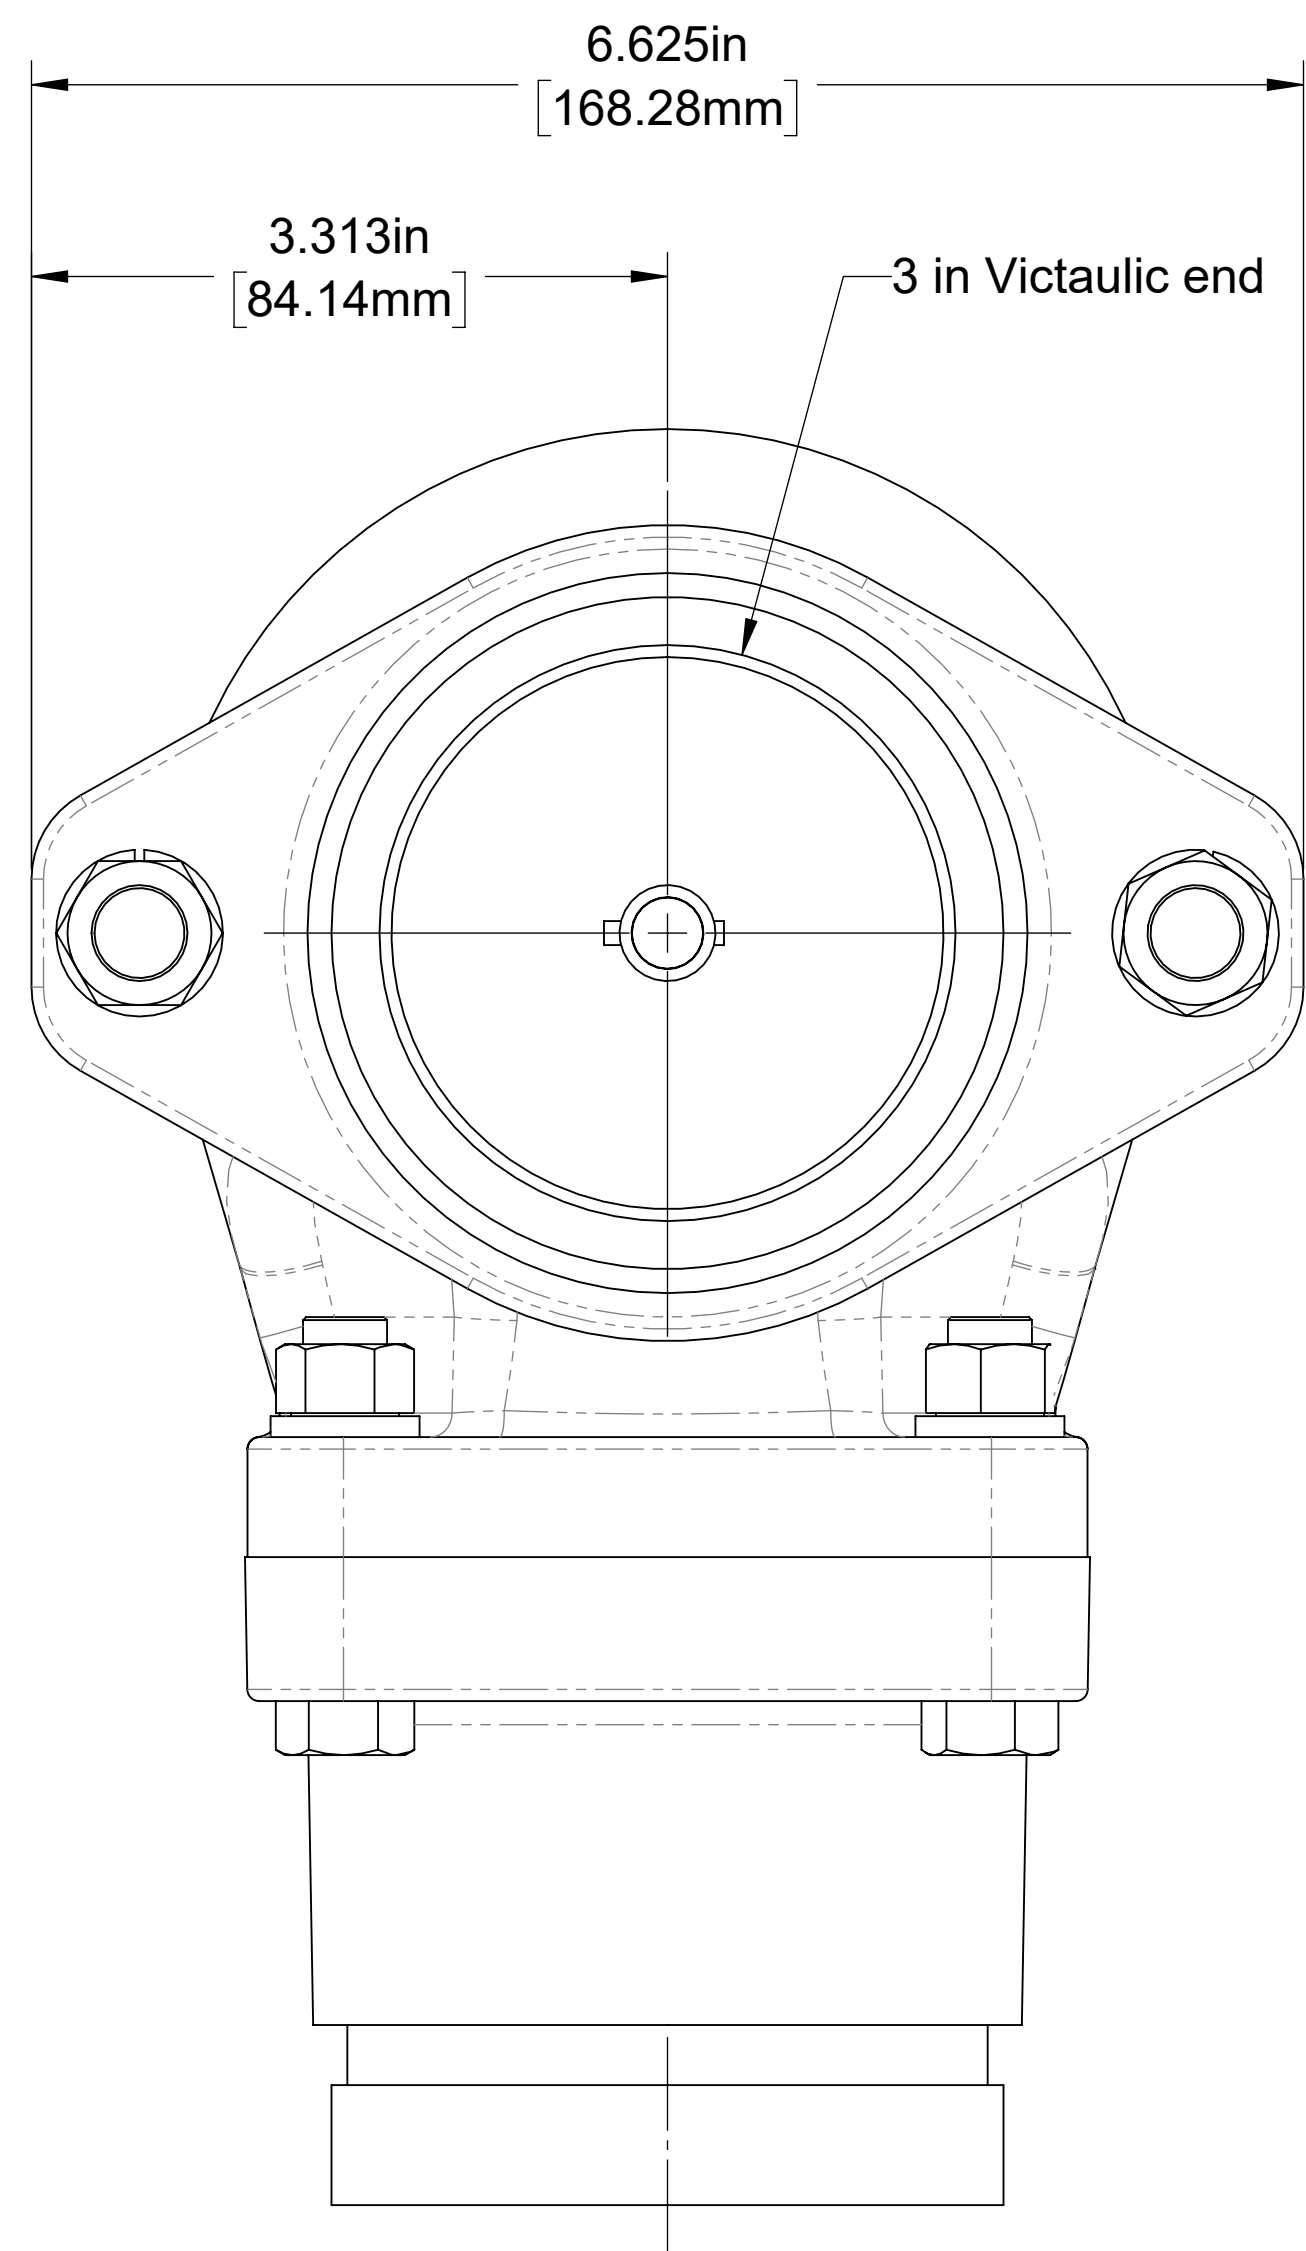


Effective 1/19/97:
Wiring to point upward only for right hand mounting configurations.

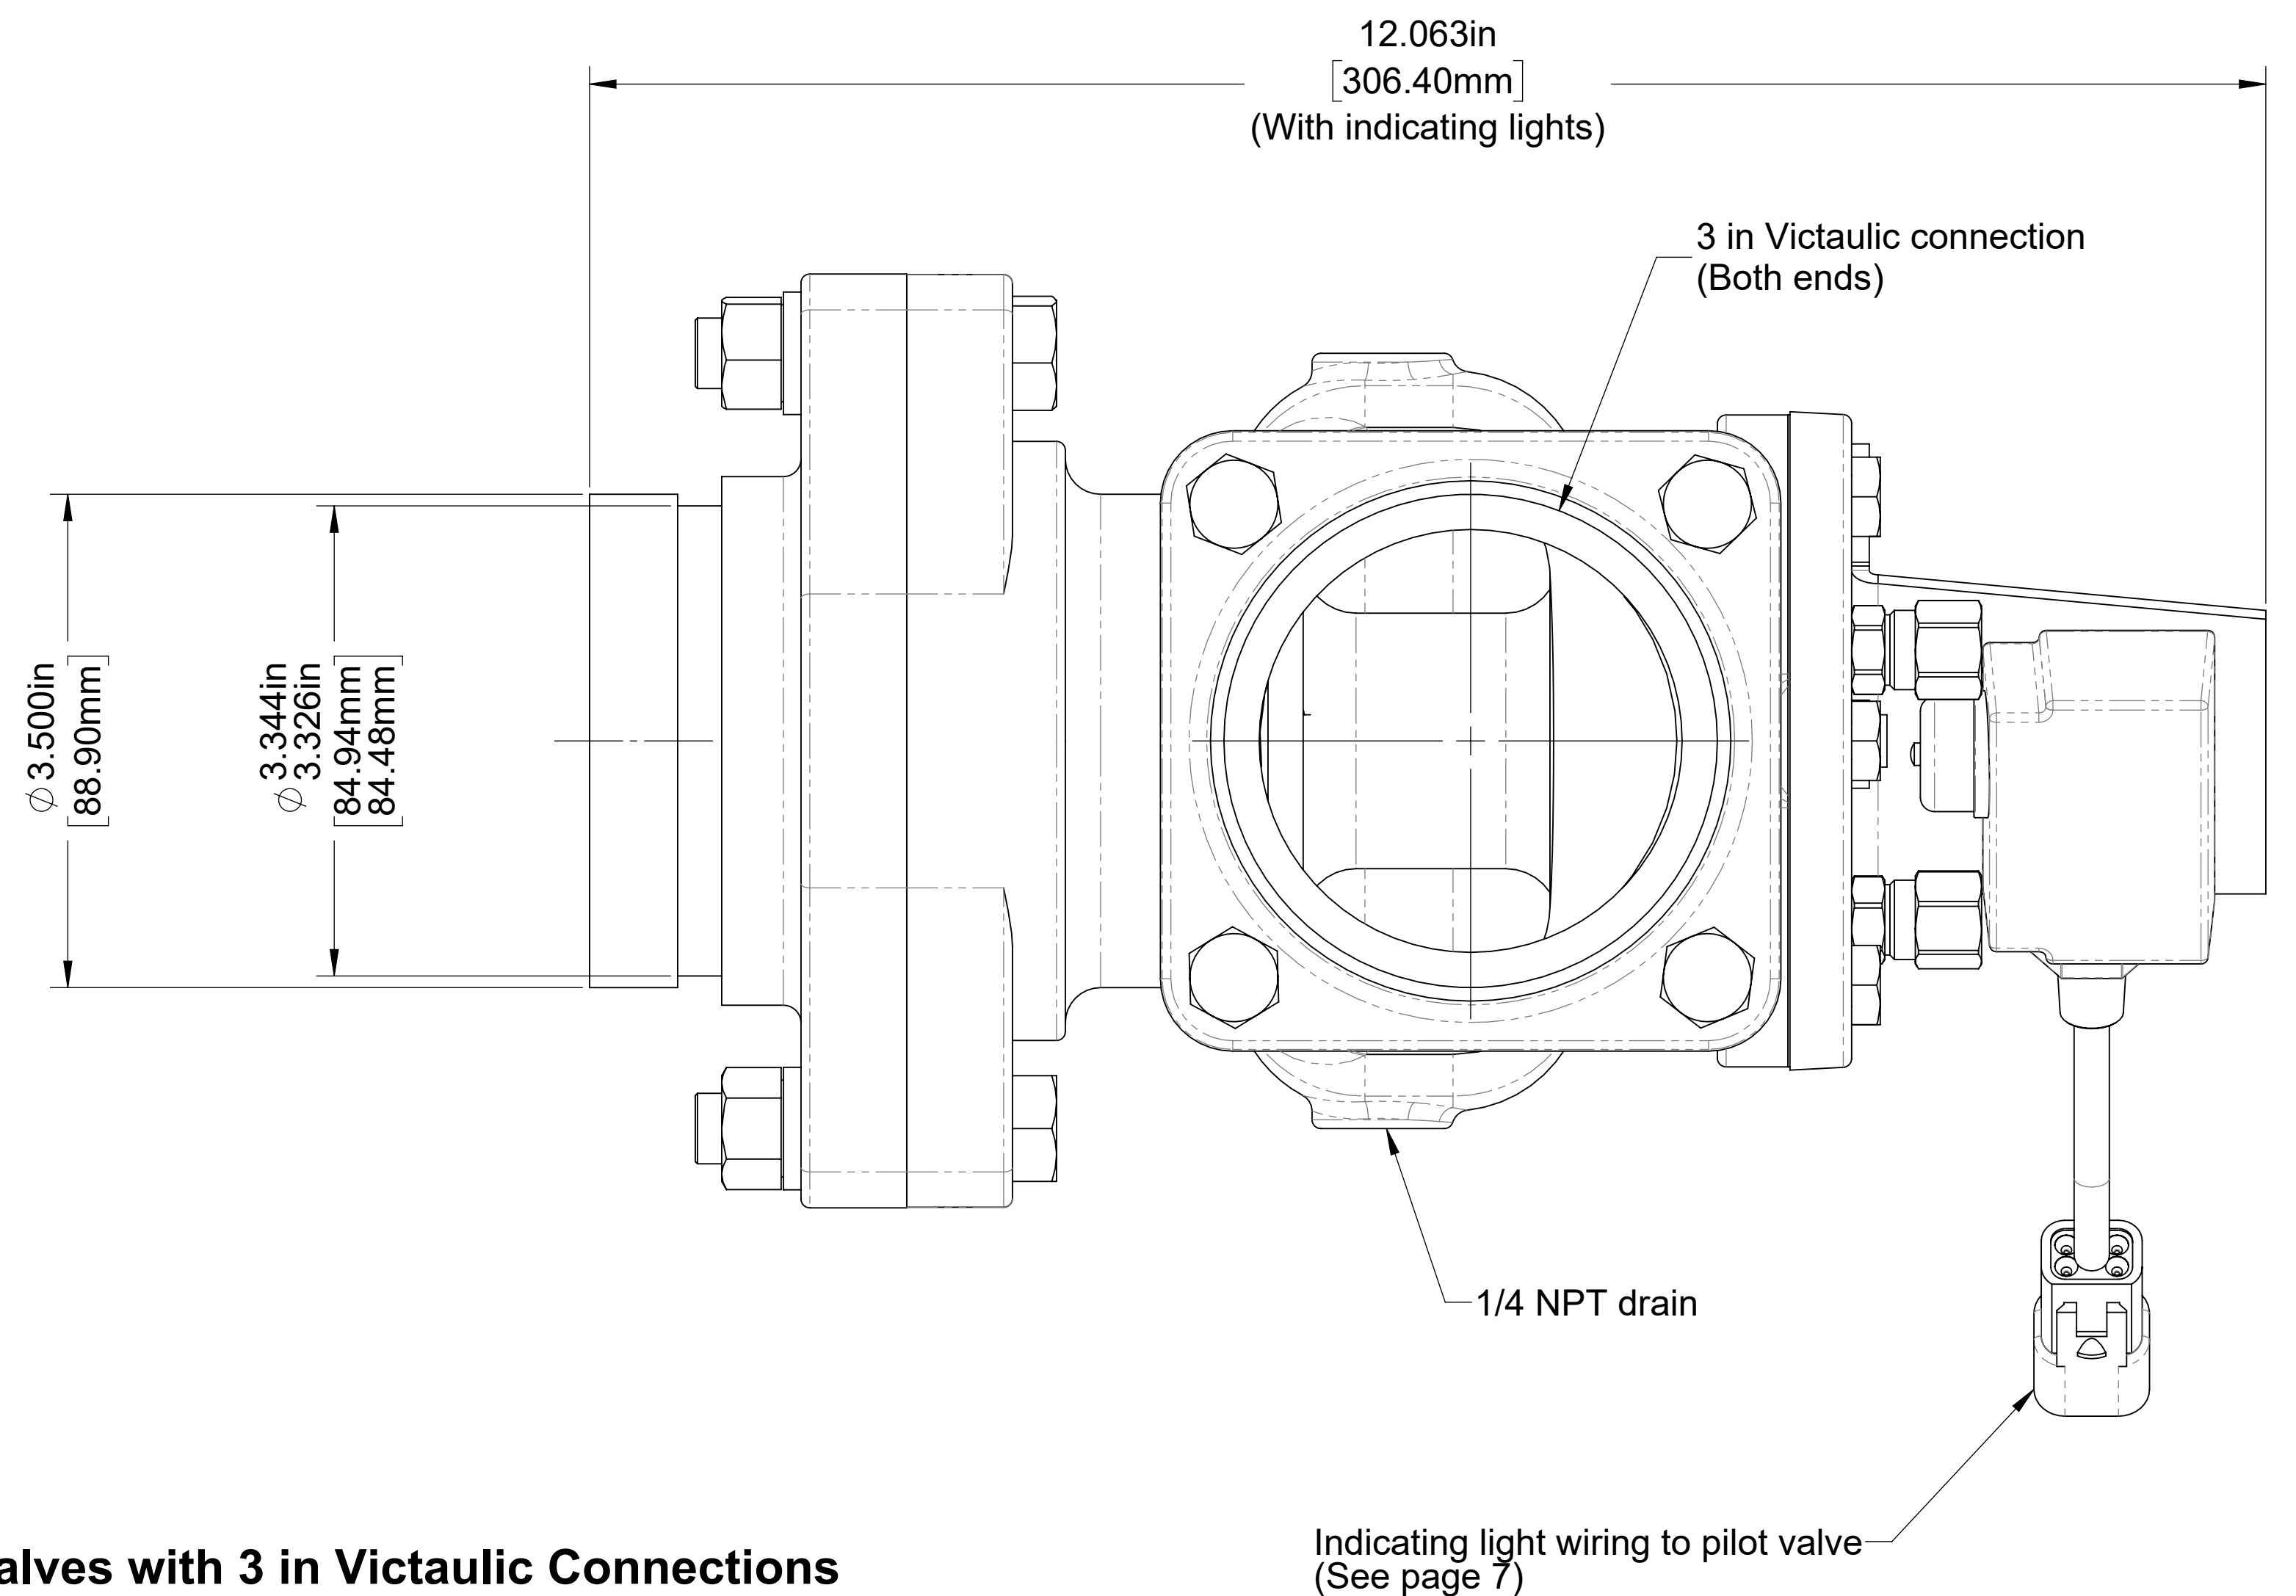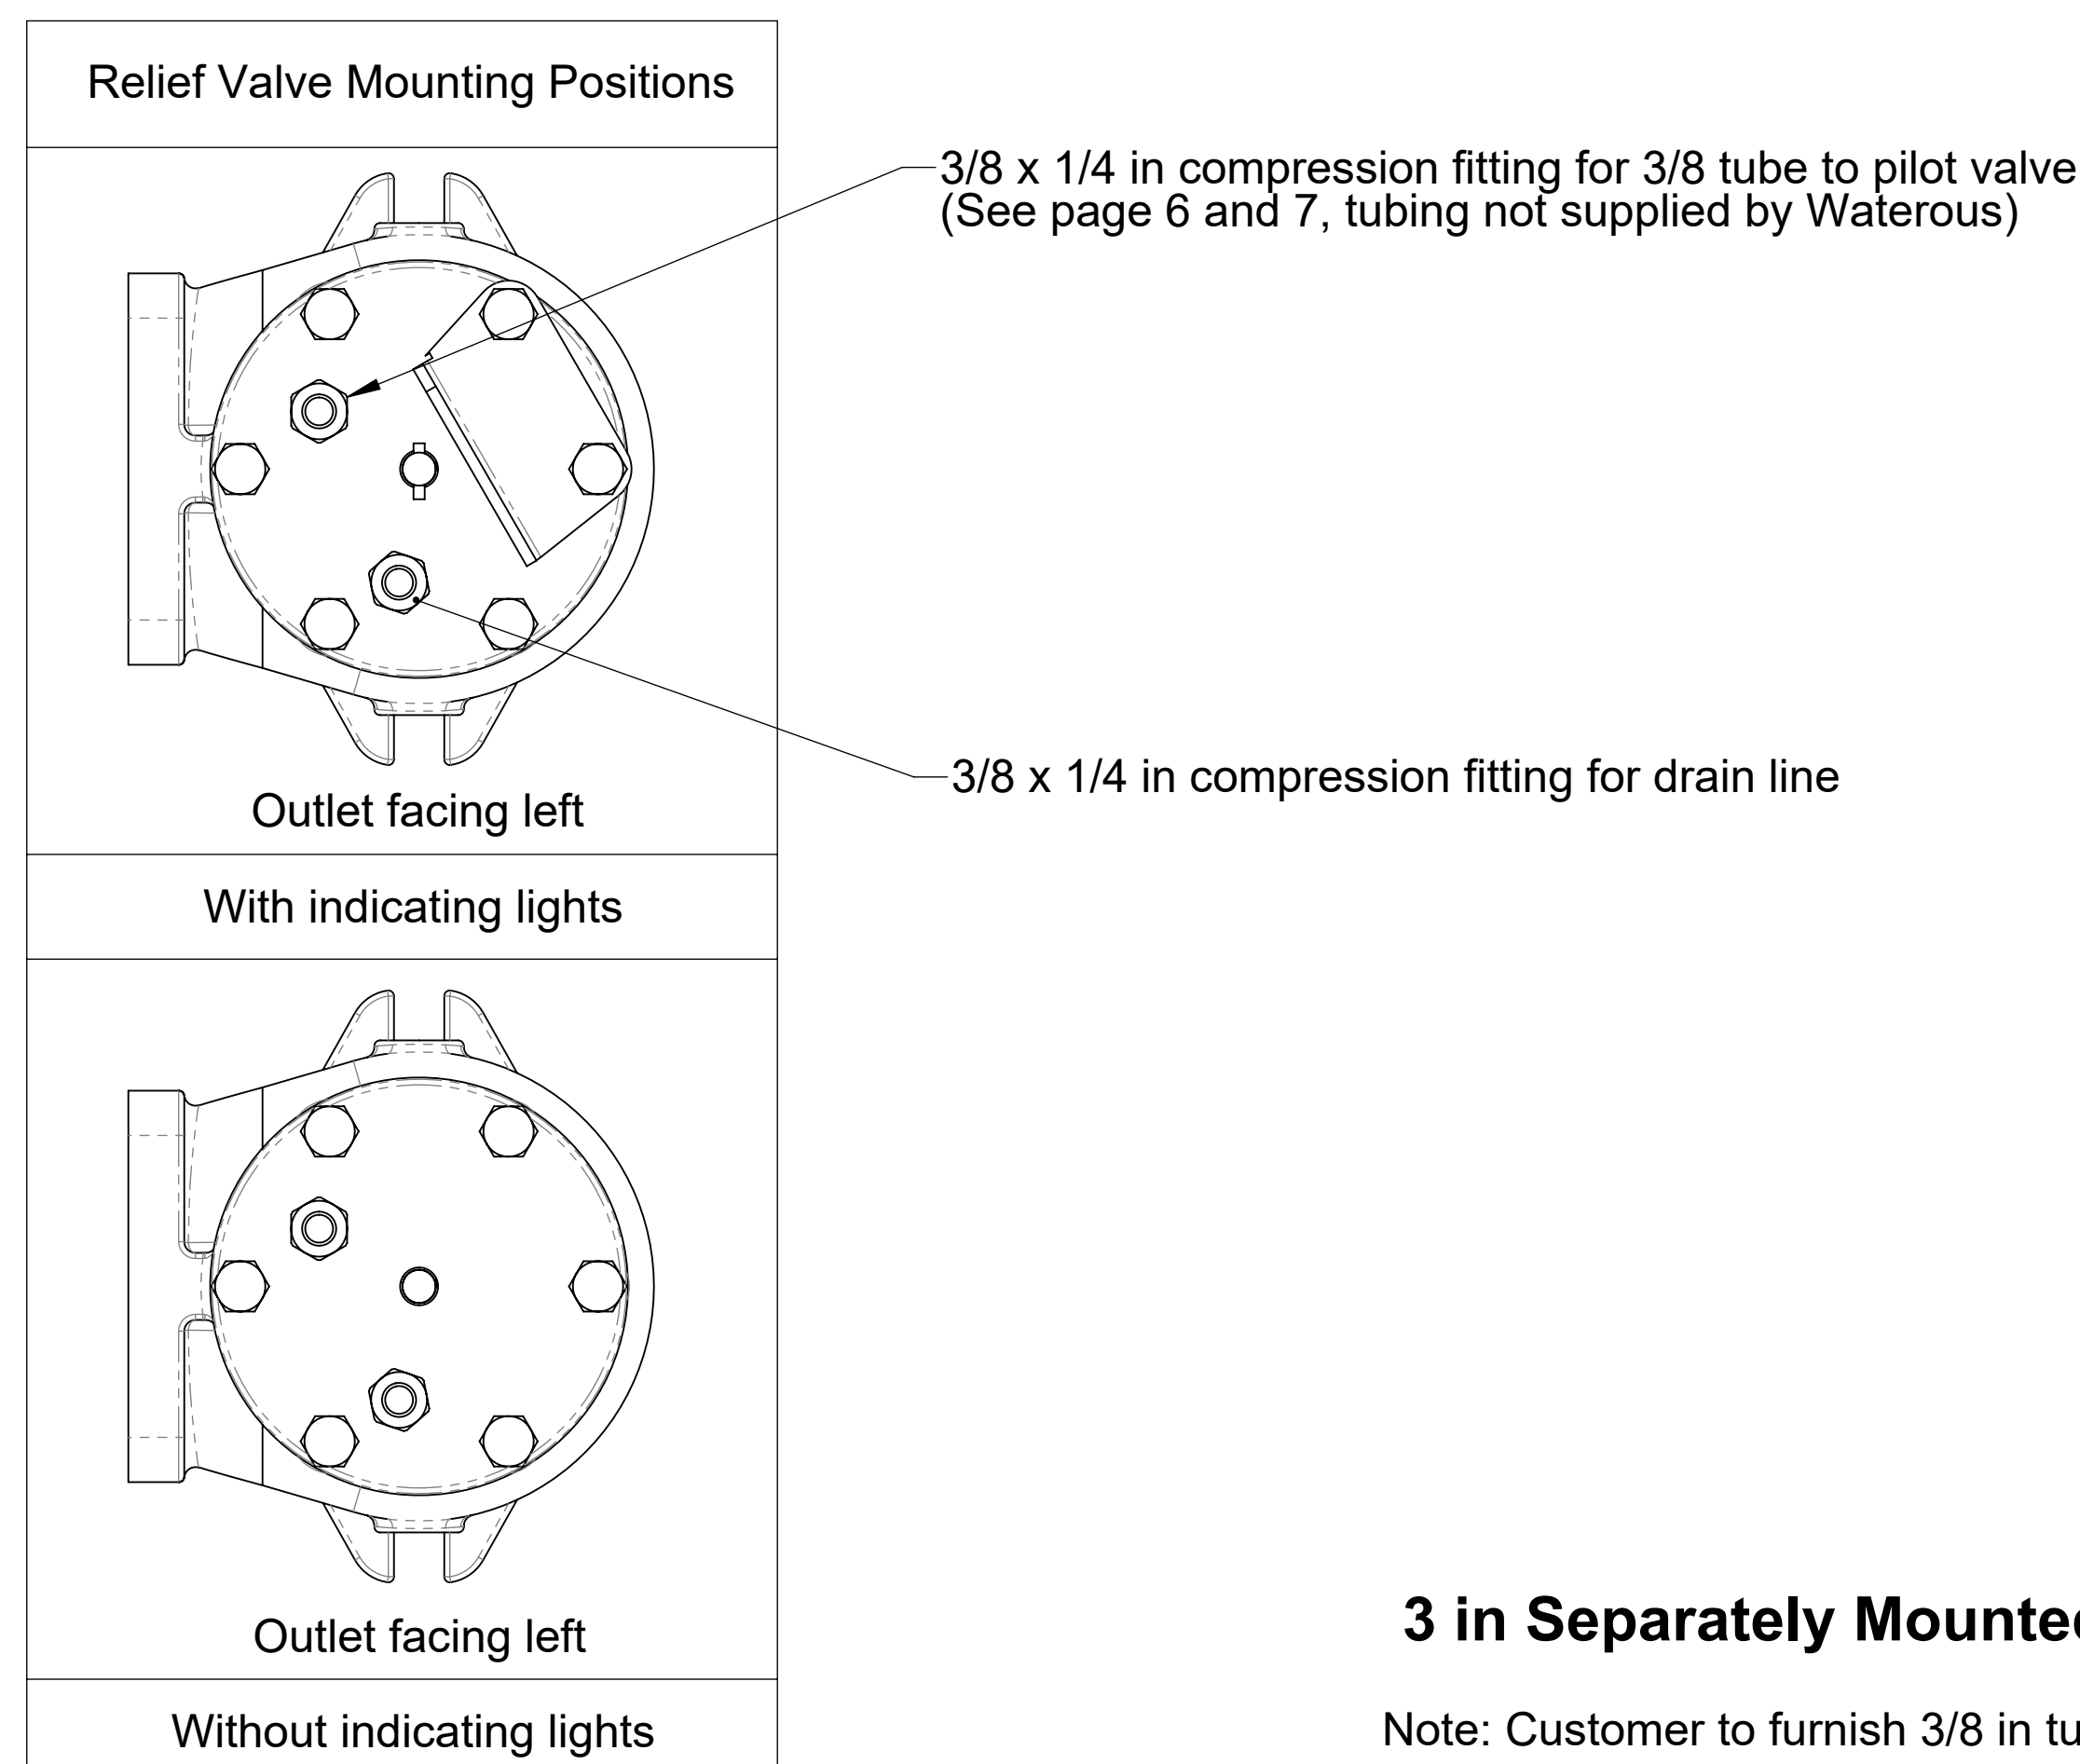

3 in Separately Mounted Relief Valves with 3 in Victaulic Connections

Note: Customer to furnish 3/8 in tubing to pilot valve and furnish piping to discharge and pump intake.

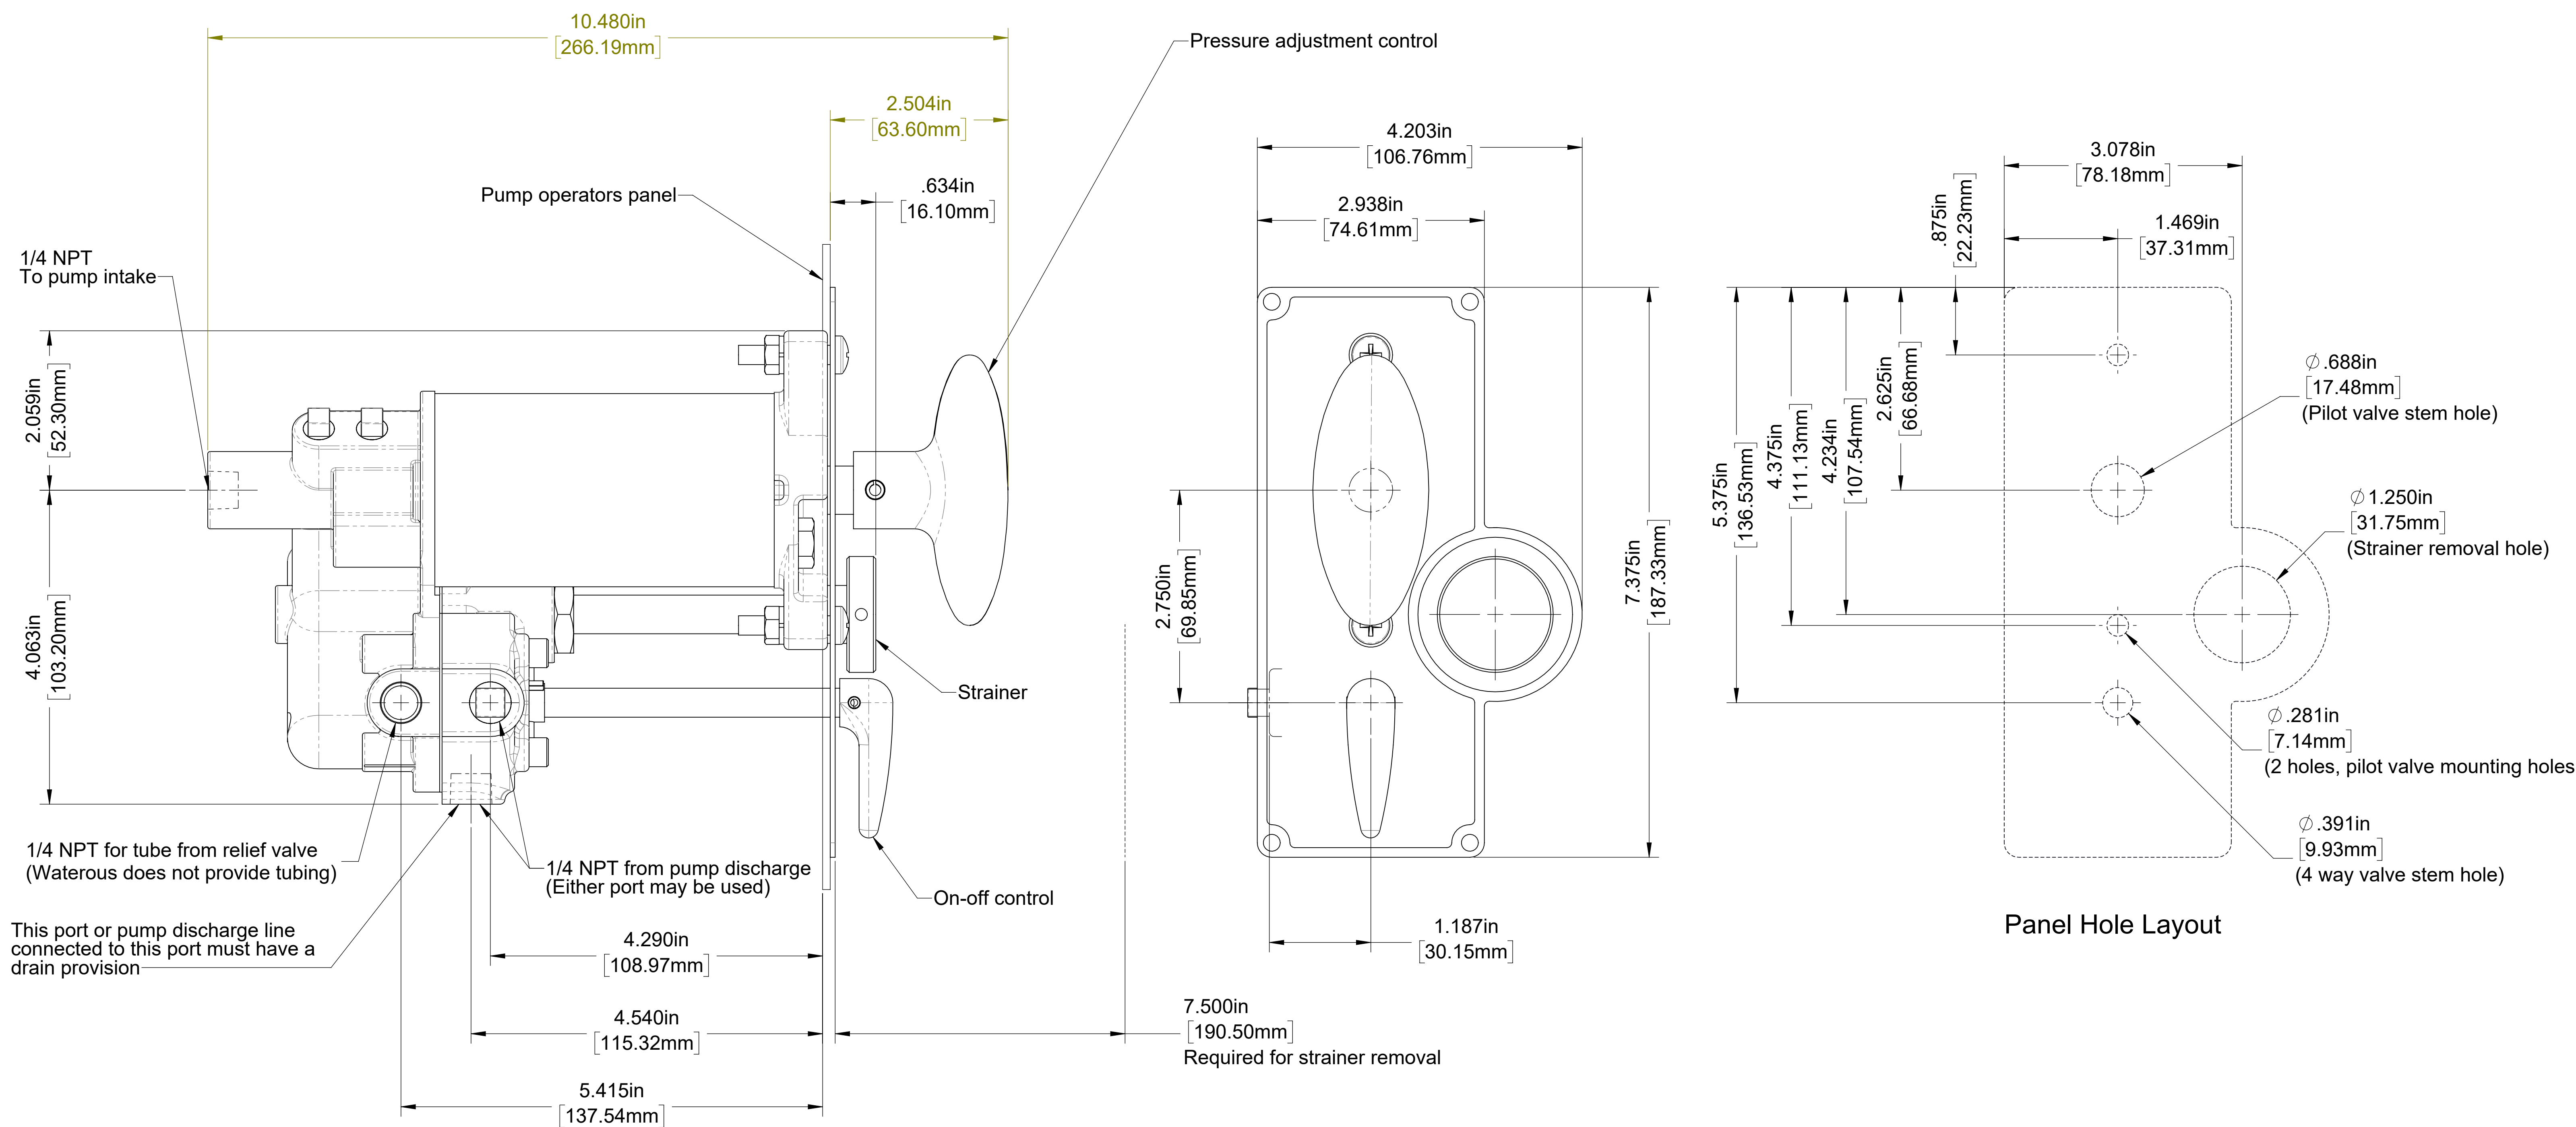

Pilot Valve without Indicating Lights

