



HL400 Series Pump Dimensional Drawings




Pump Model	Drive			Impeller Rotation (2)	See Page										
	Type	Input Shaft	Input Rotation (1)		Pump and Transmission			Available			Optional				
					Pump	Transmission Mounting Positions	Priming Isolation Valve (PIV) Solenoid Valve	Intake Connections	Discharge Manifold	Auxiliary Fittings	RTP Foam System		Control Panels		Gauges and Monitors
											Mounted on Pump	Remotely Mounted	Panels	Wiring Schematic	
HL400D	Direct Drive	1410 Series Companion Flange	CW	CCW	2	--	7	Standard (8) Short (9)	10	11, 12	13	See DPL83197	14	15	16
			CCW	CW	3										
HL400K	Heavy Duty K Series Transmission	1-3/8-10 SAE Spline	CW	CW	4	6									
			CCW	CCW	5	6									

Notes:
1. Drive input rotation defined as viewed looking directly at direct drive or transmission input shaft.
2. Impeller rotation defined as viewed looking directly into impeller eye from intake end of pump.

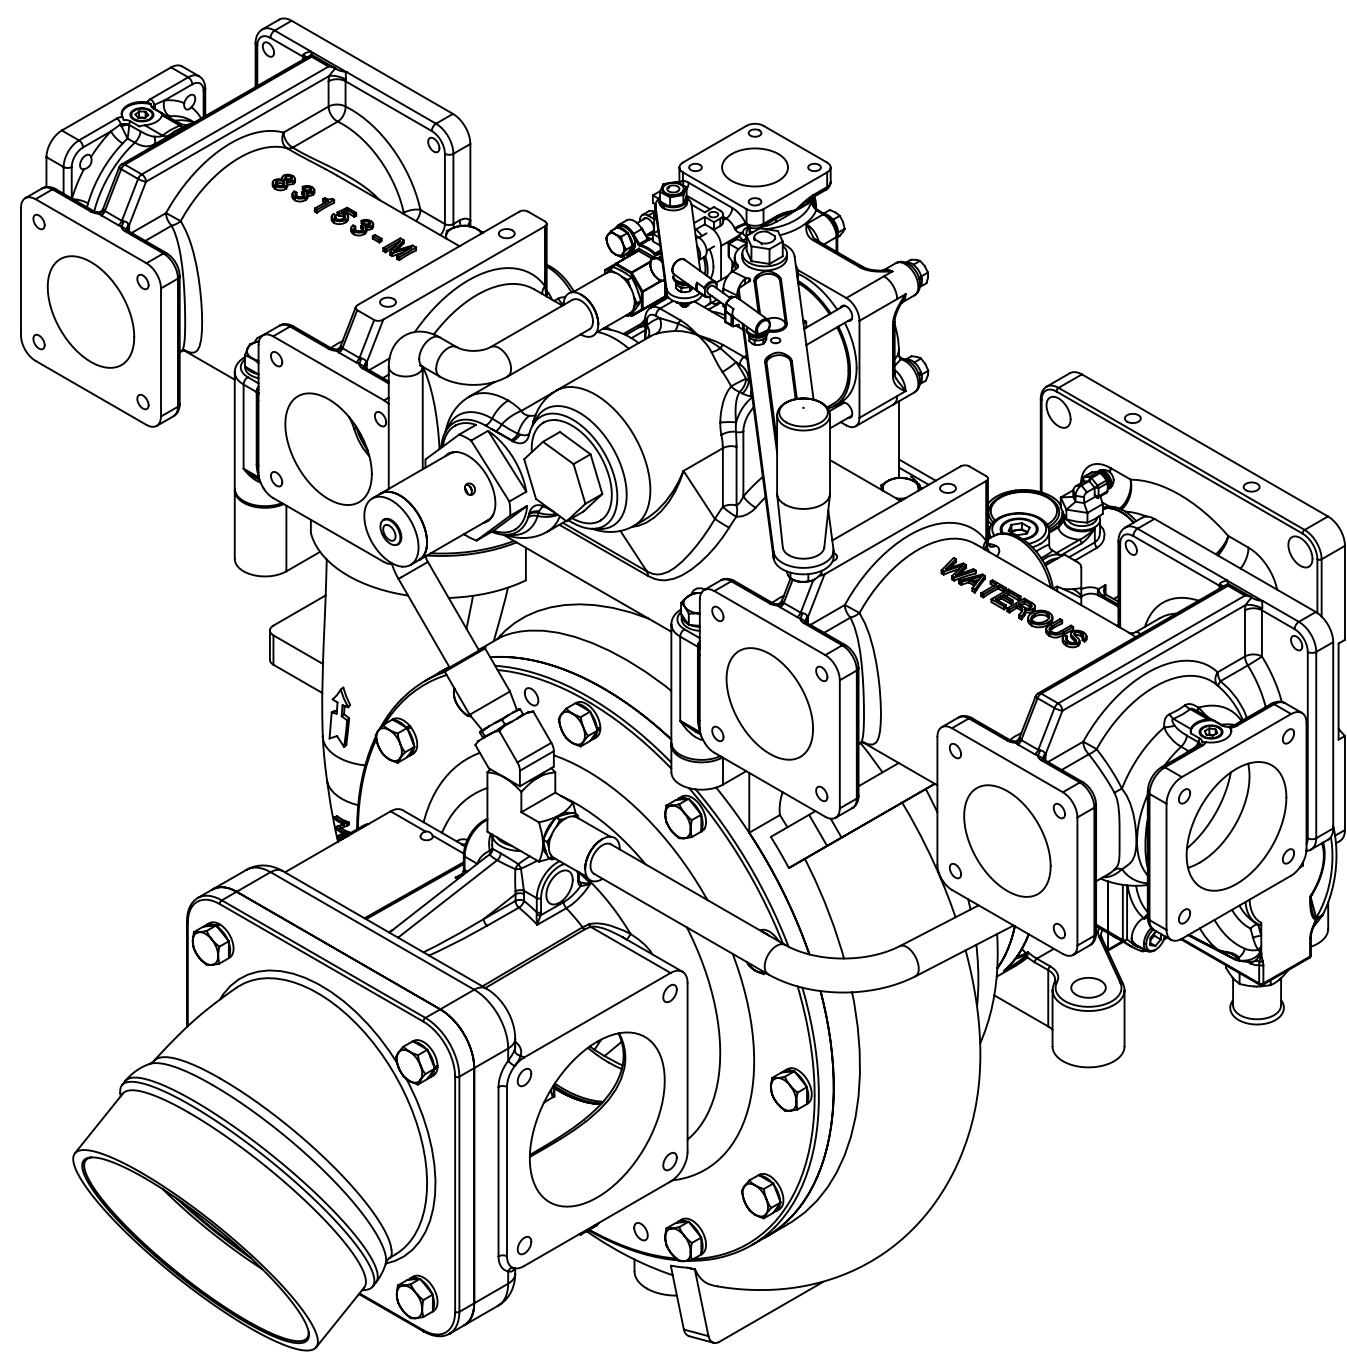


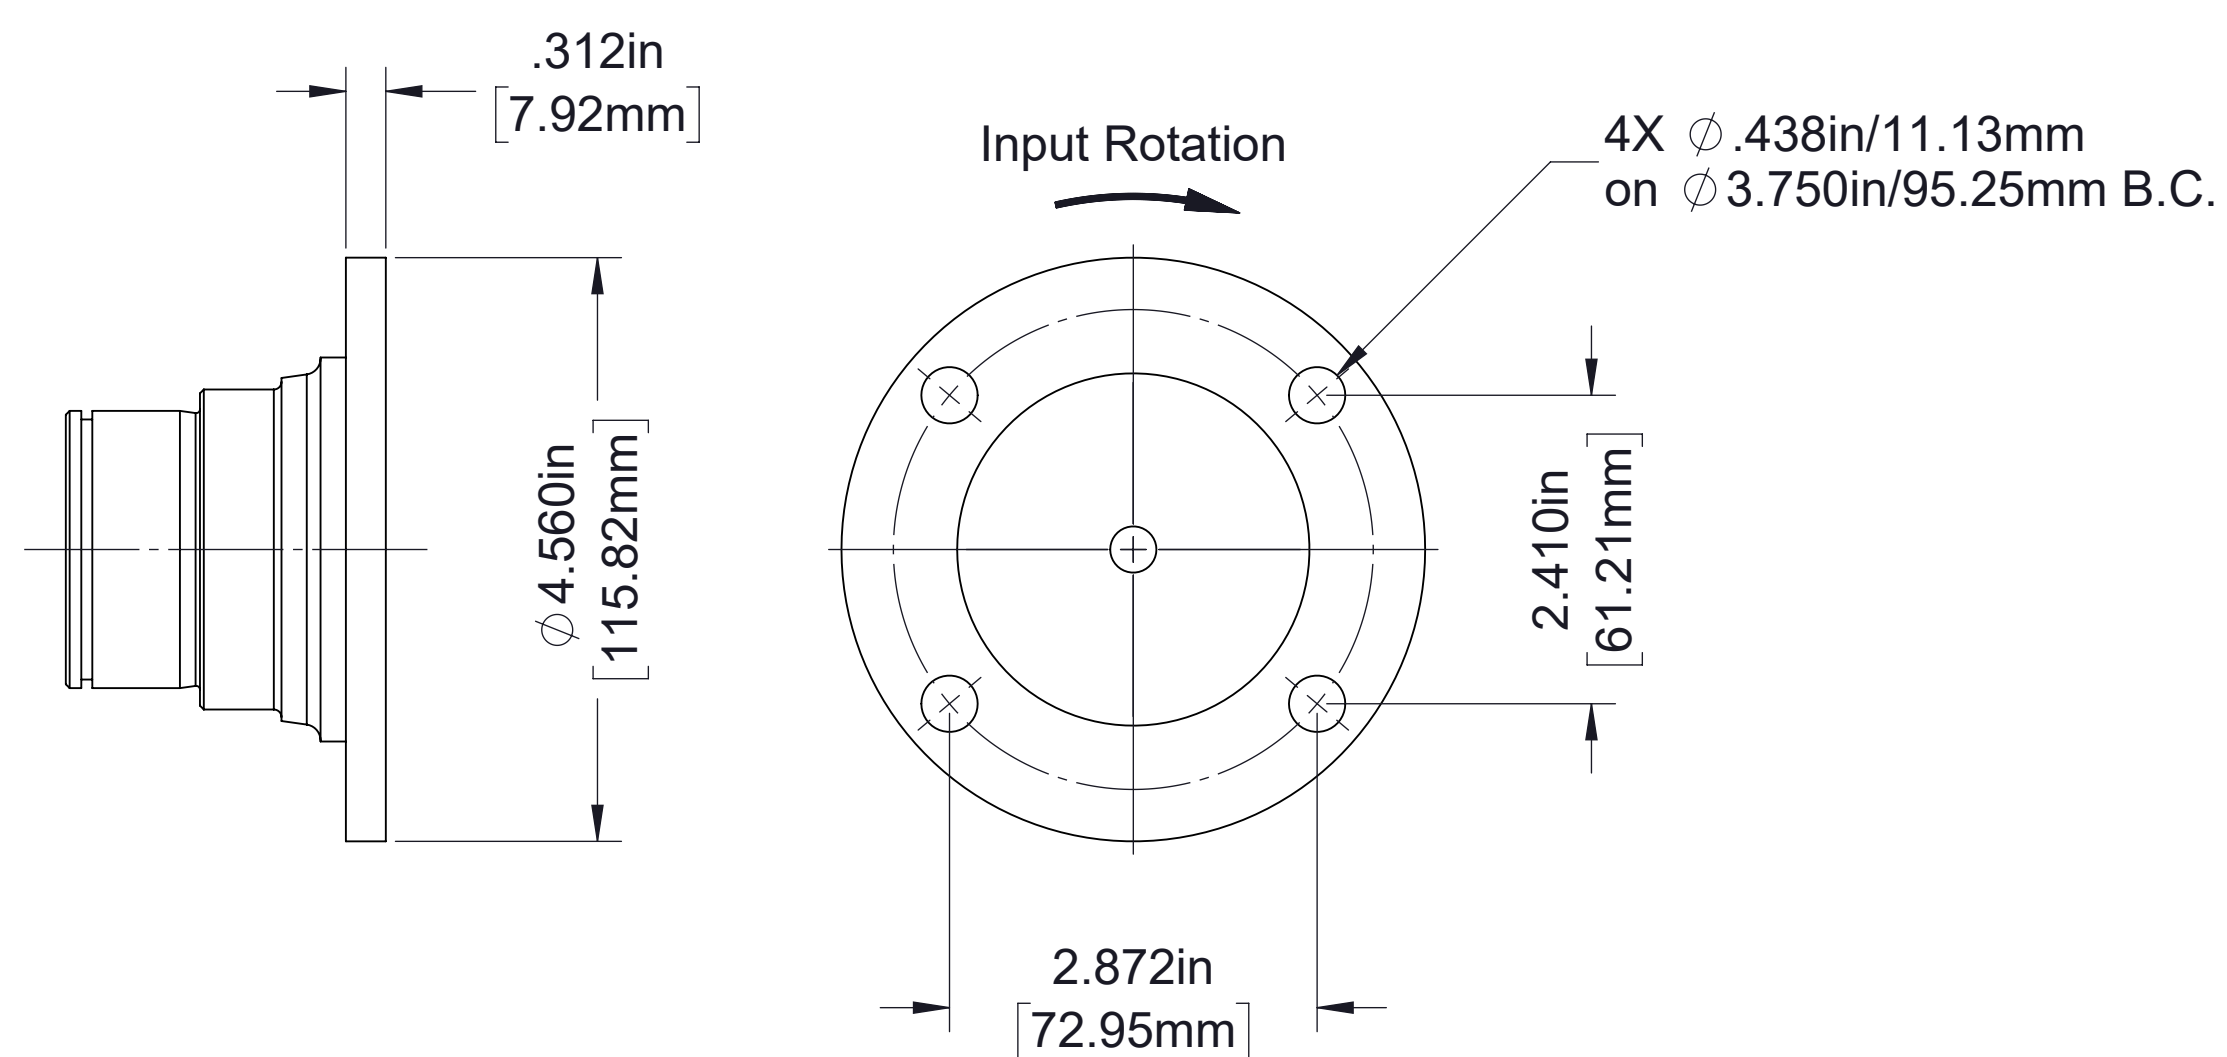




1410 Series Companion Flange Detail

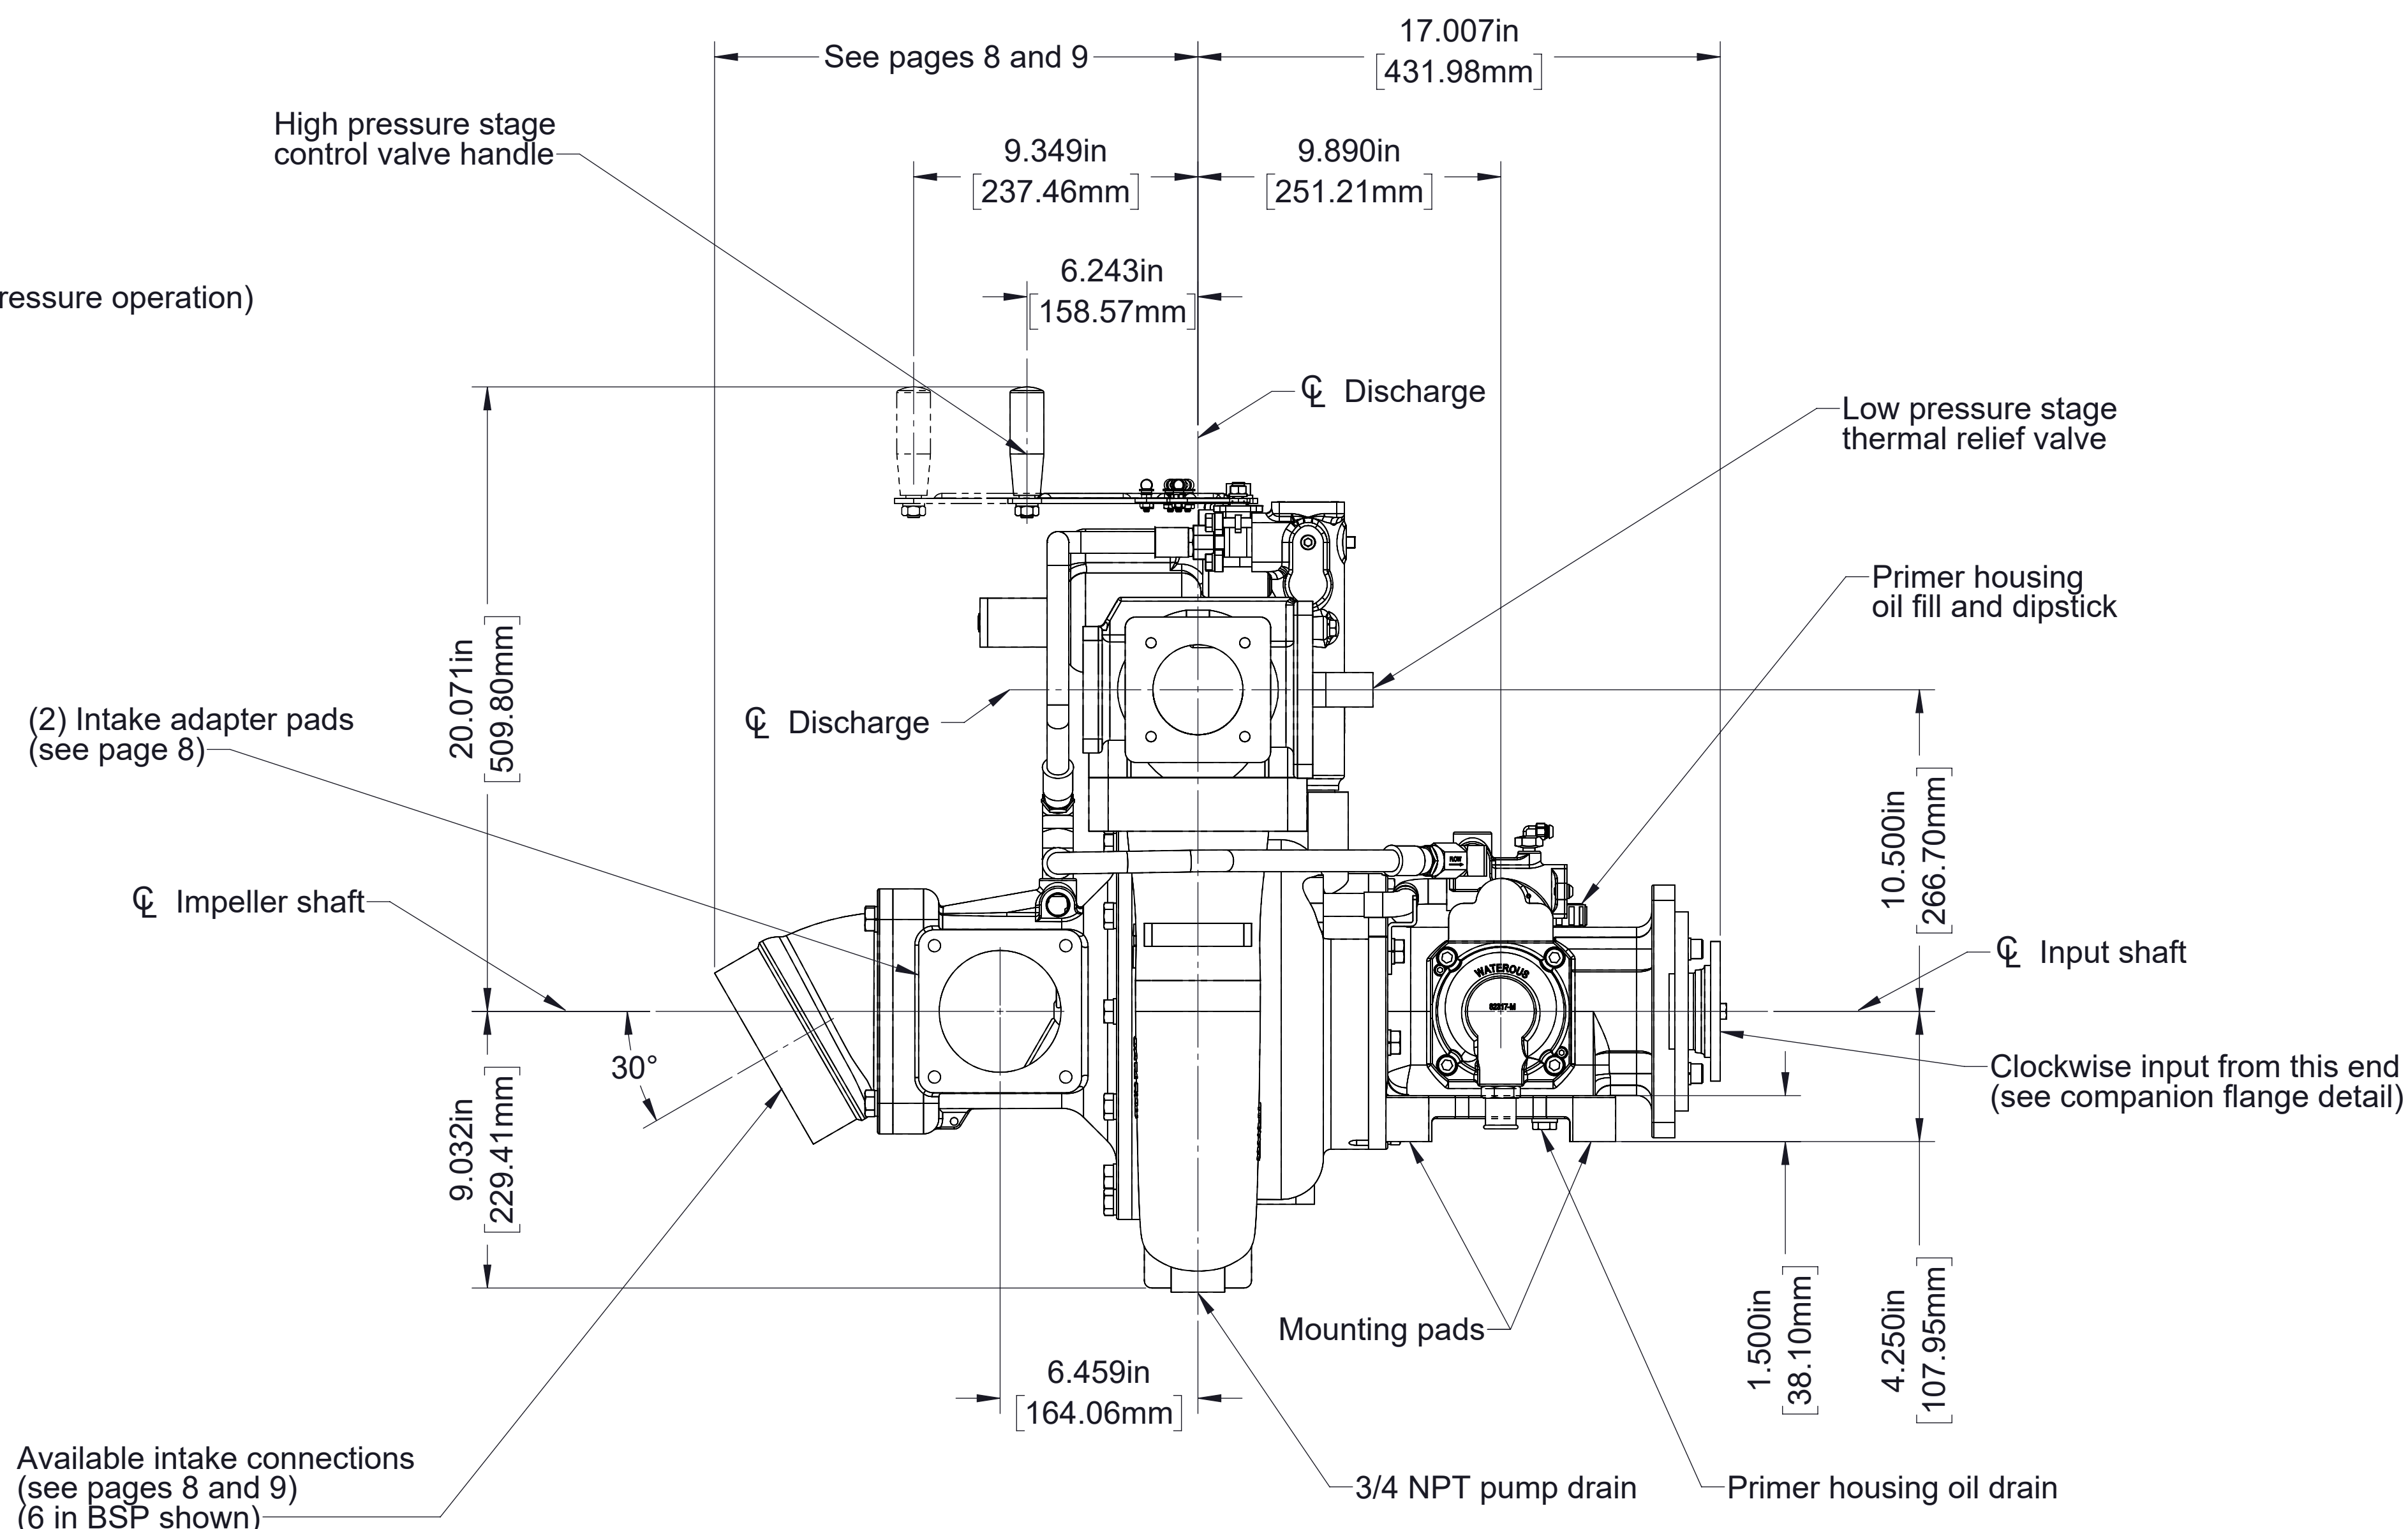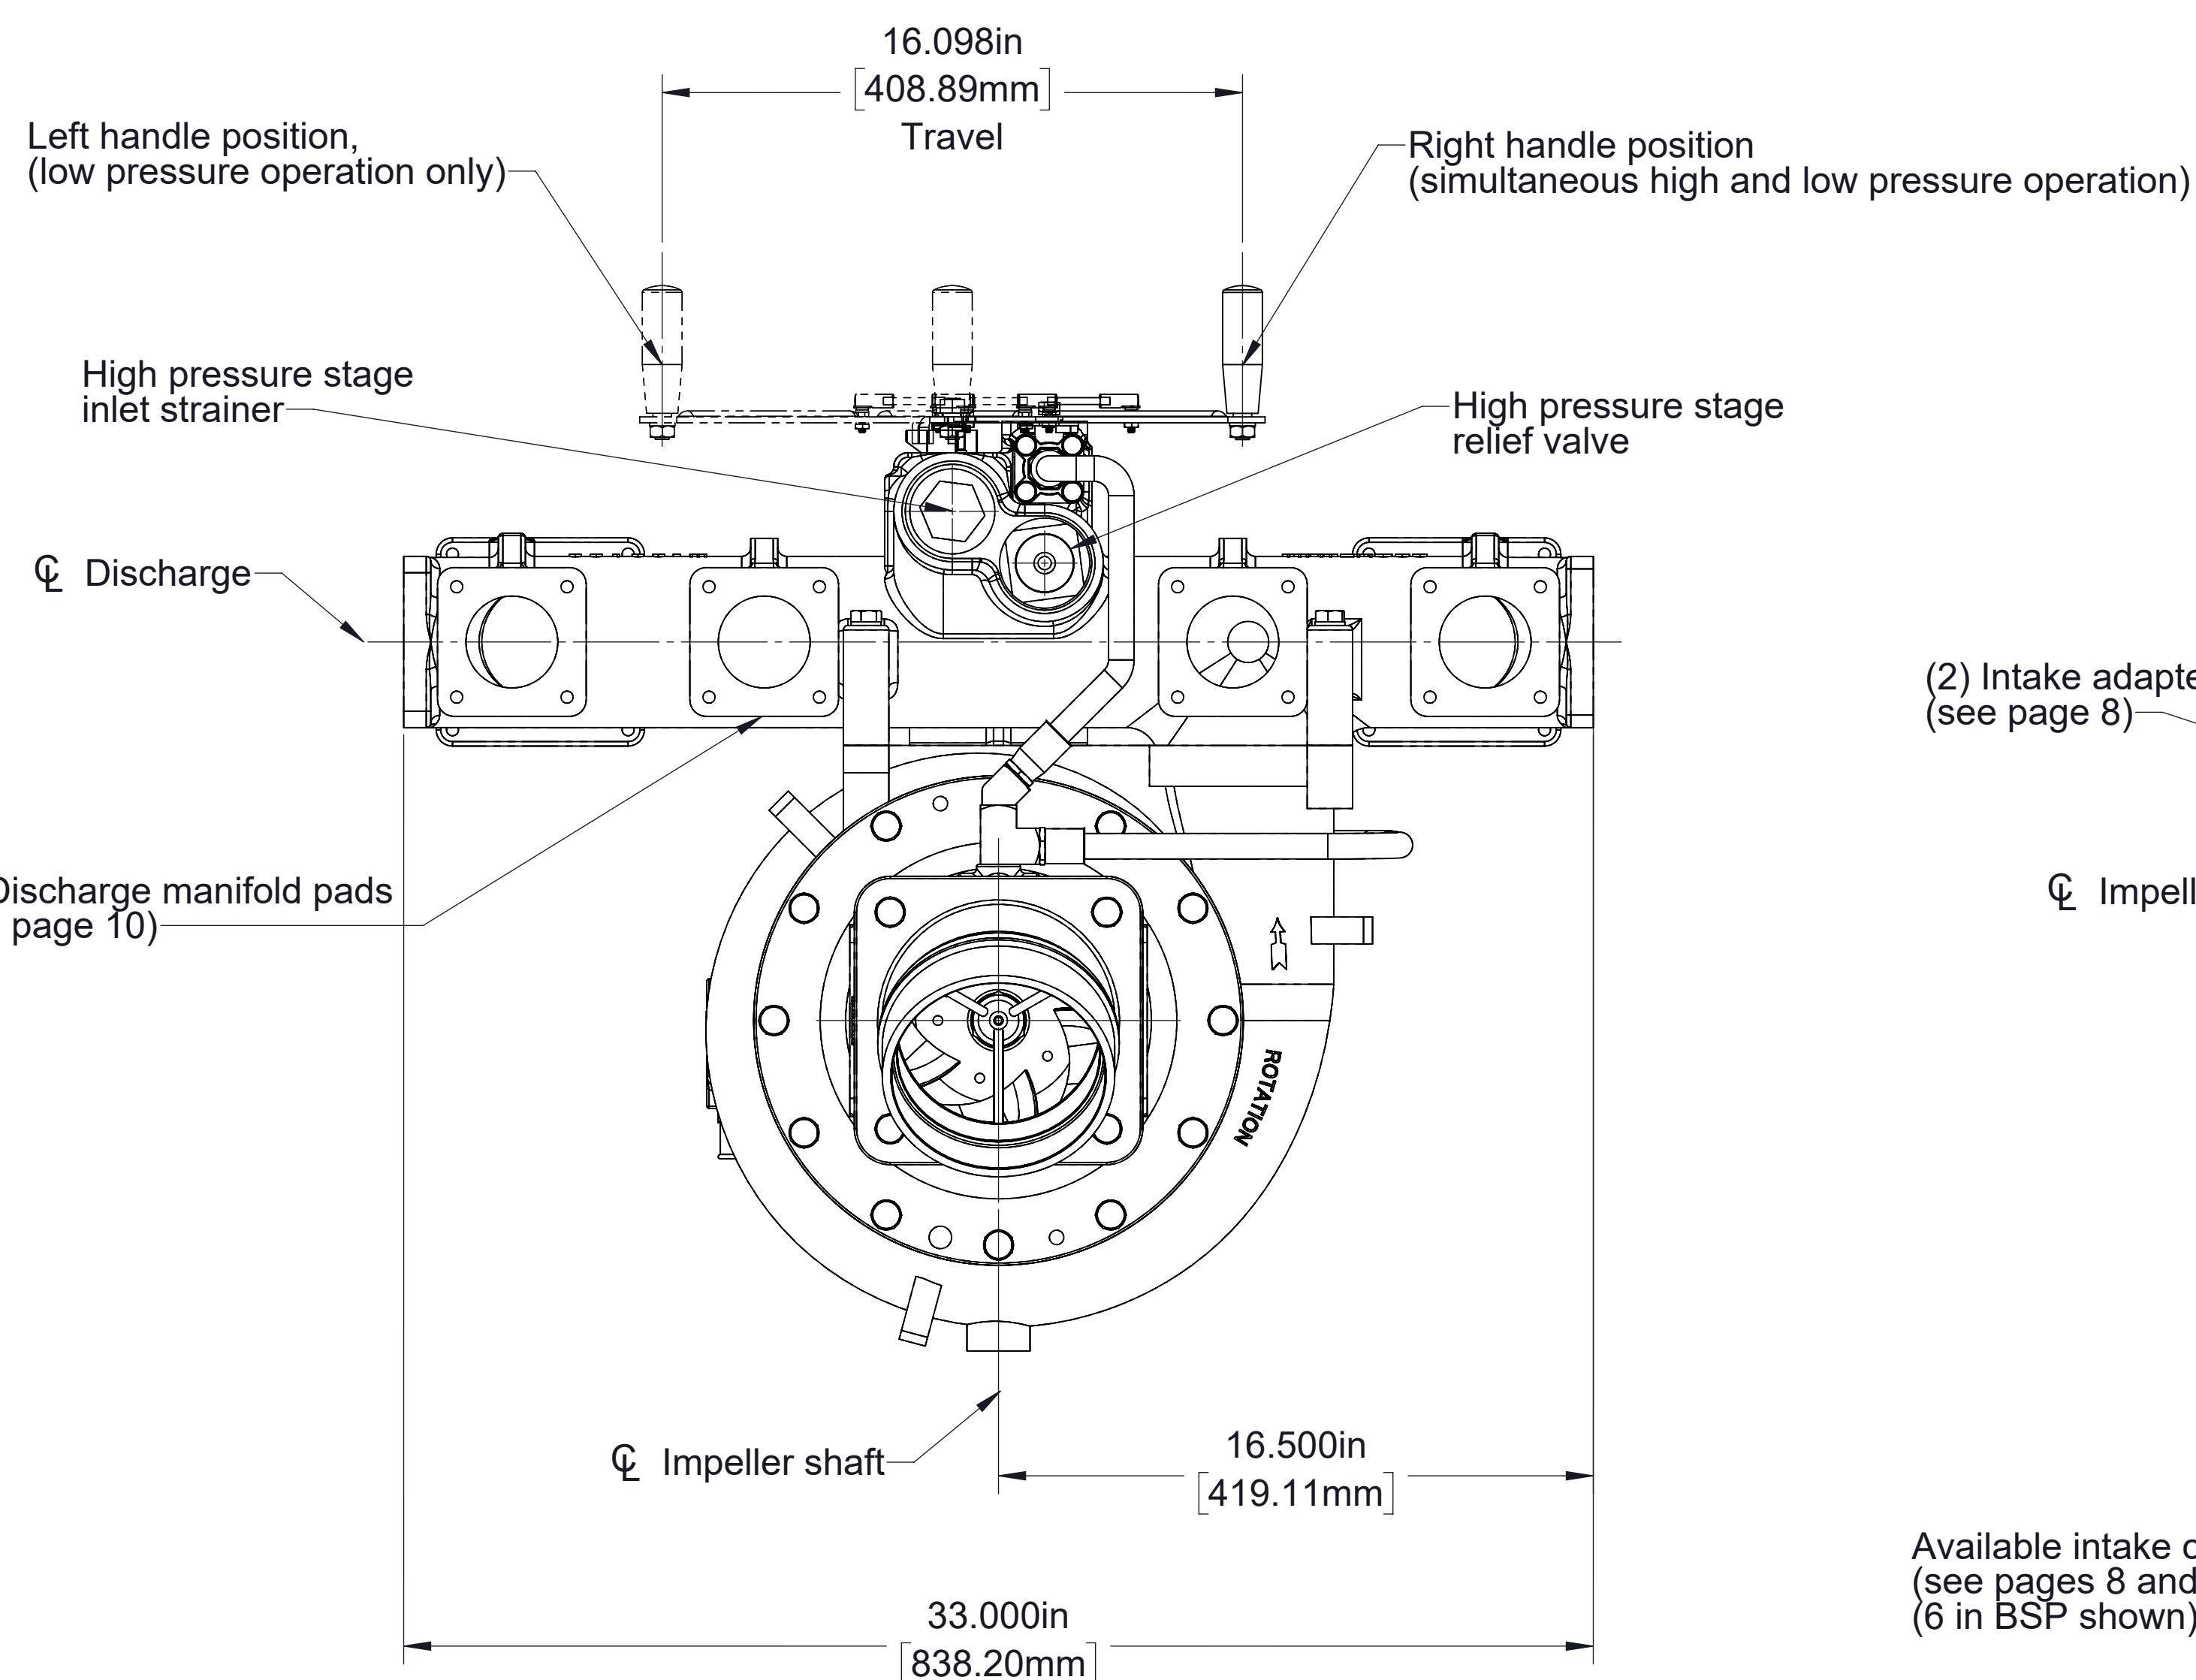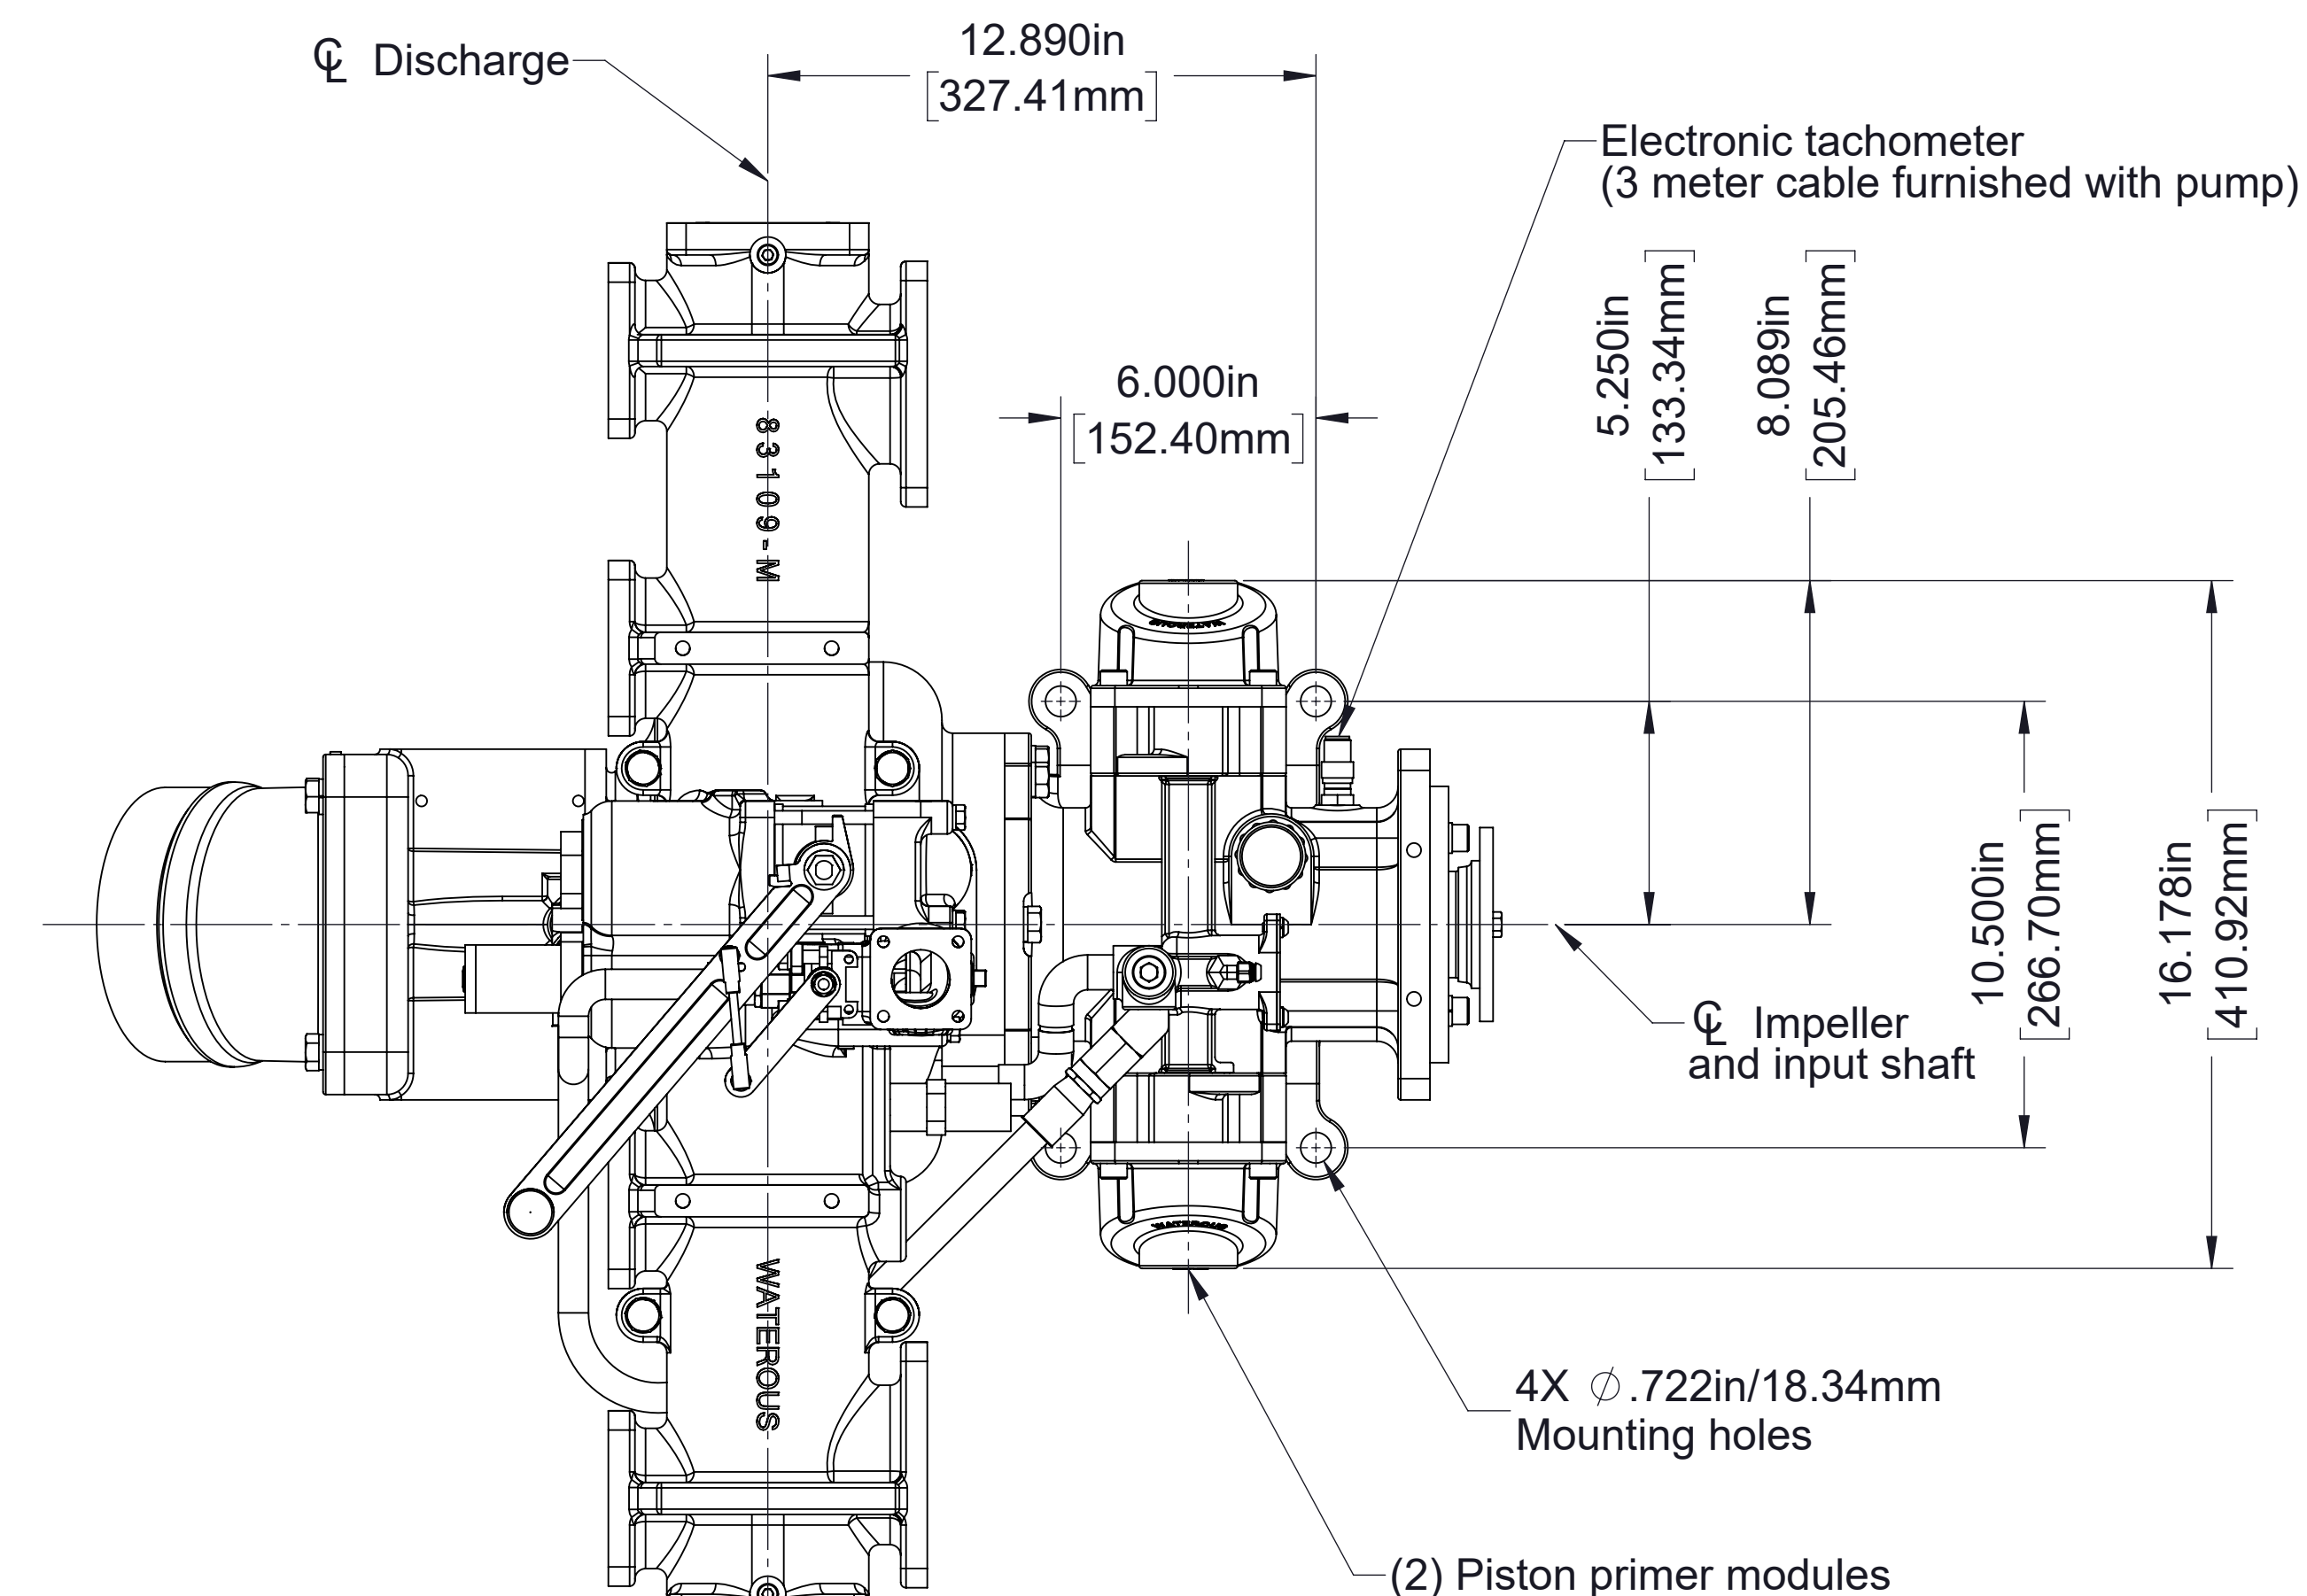


**HL400D Pump
Clockwise Input Rotation**

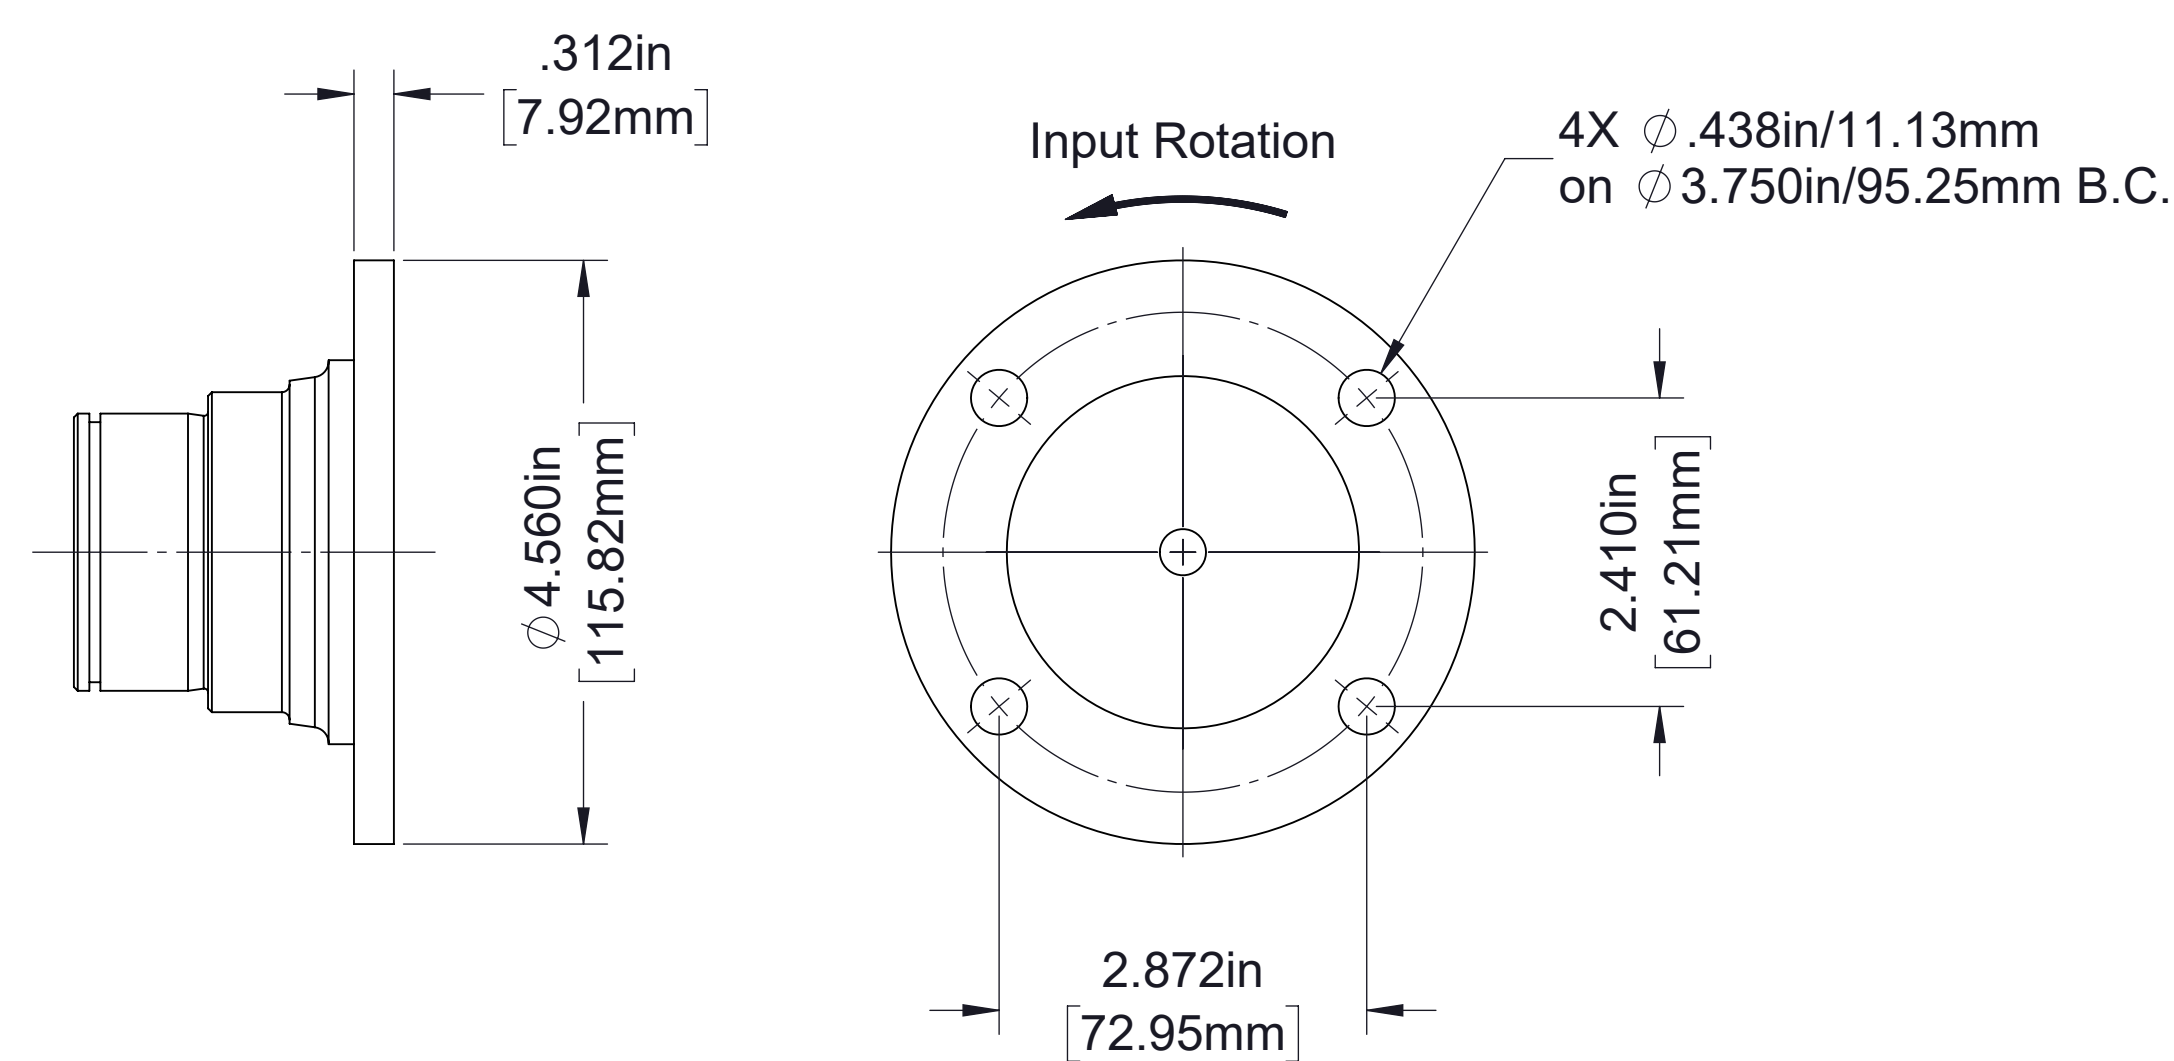




1410 Series Companion Flange Detail

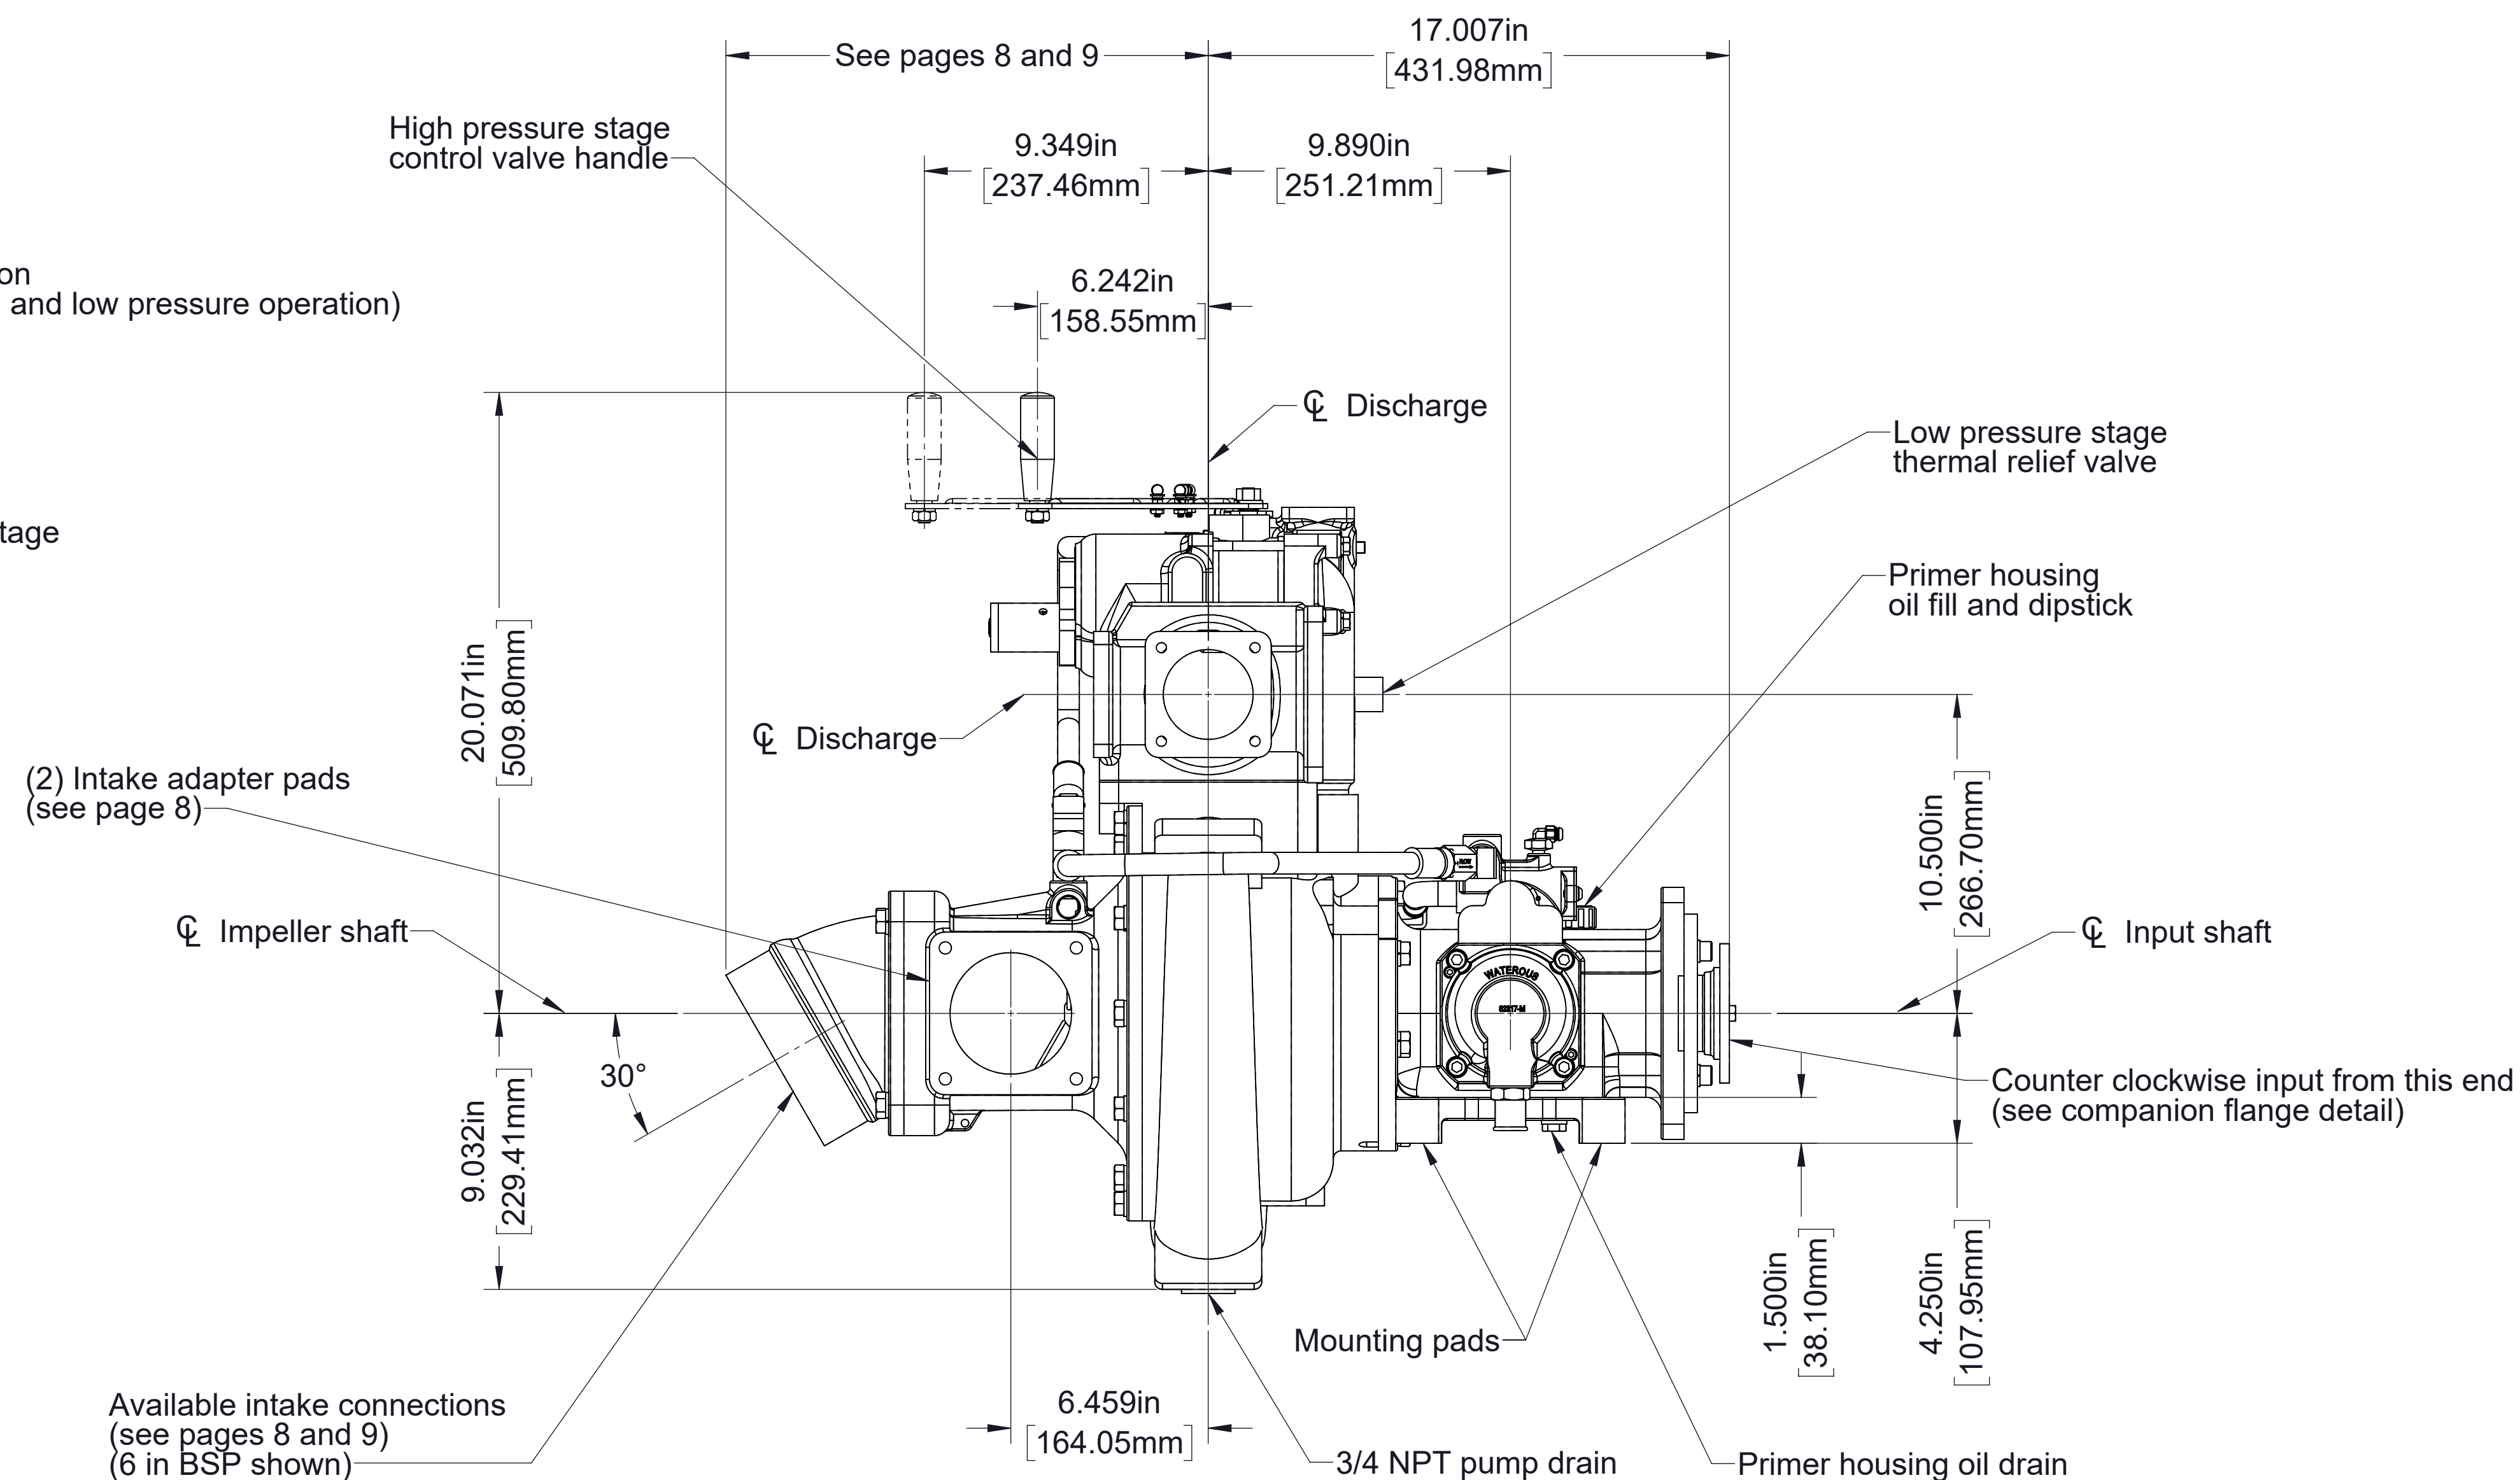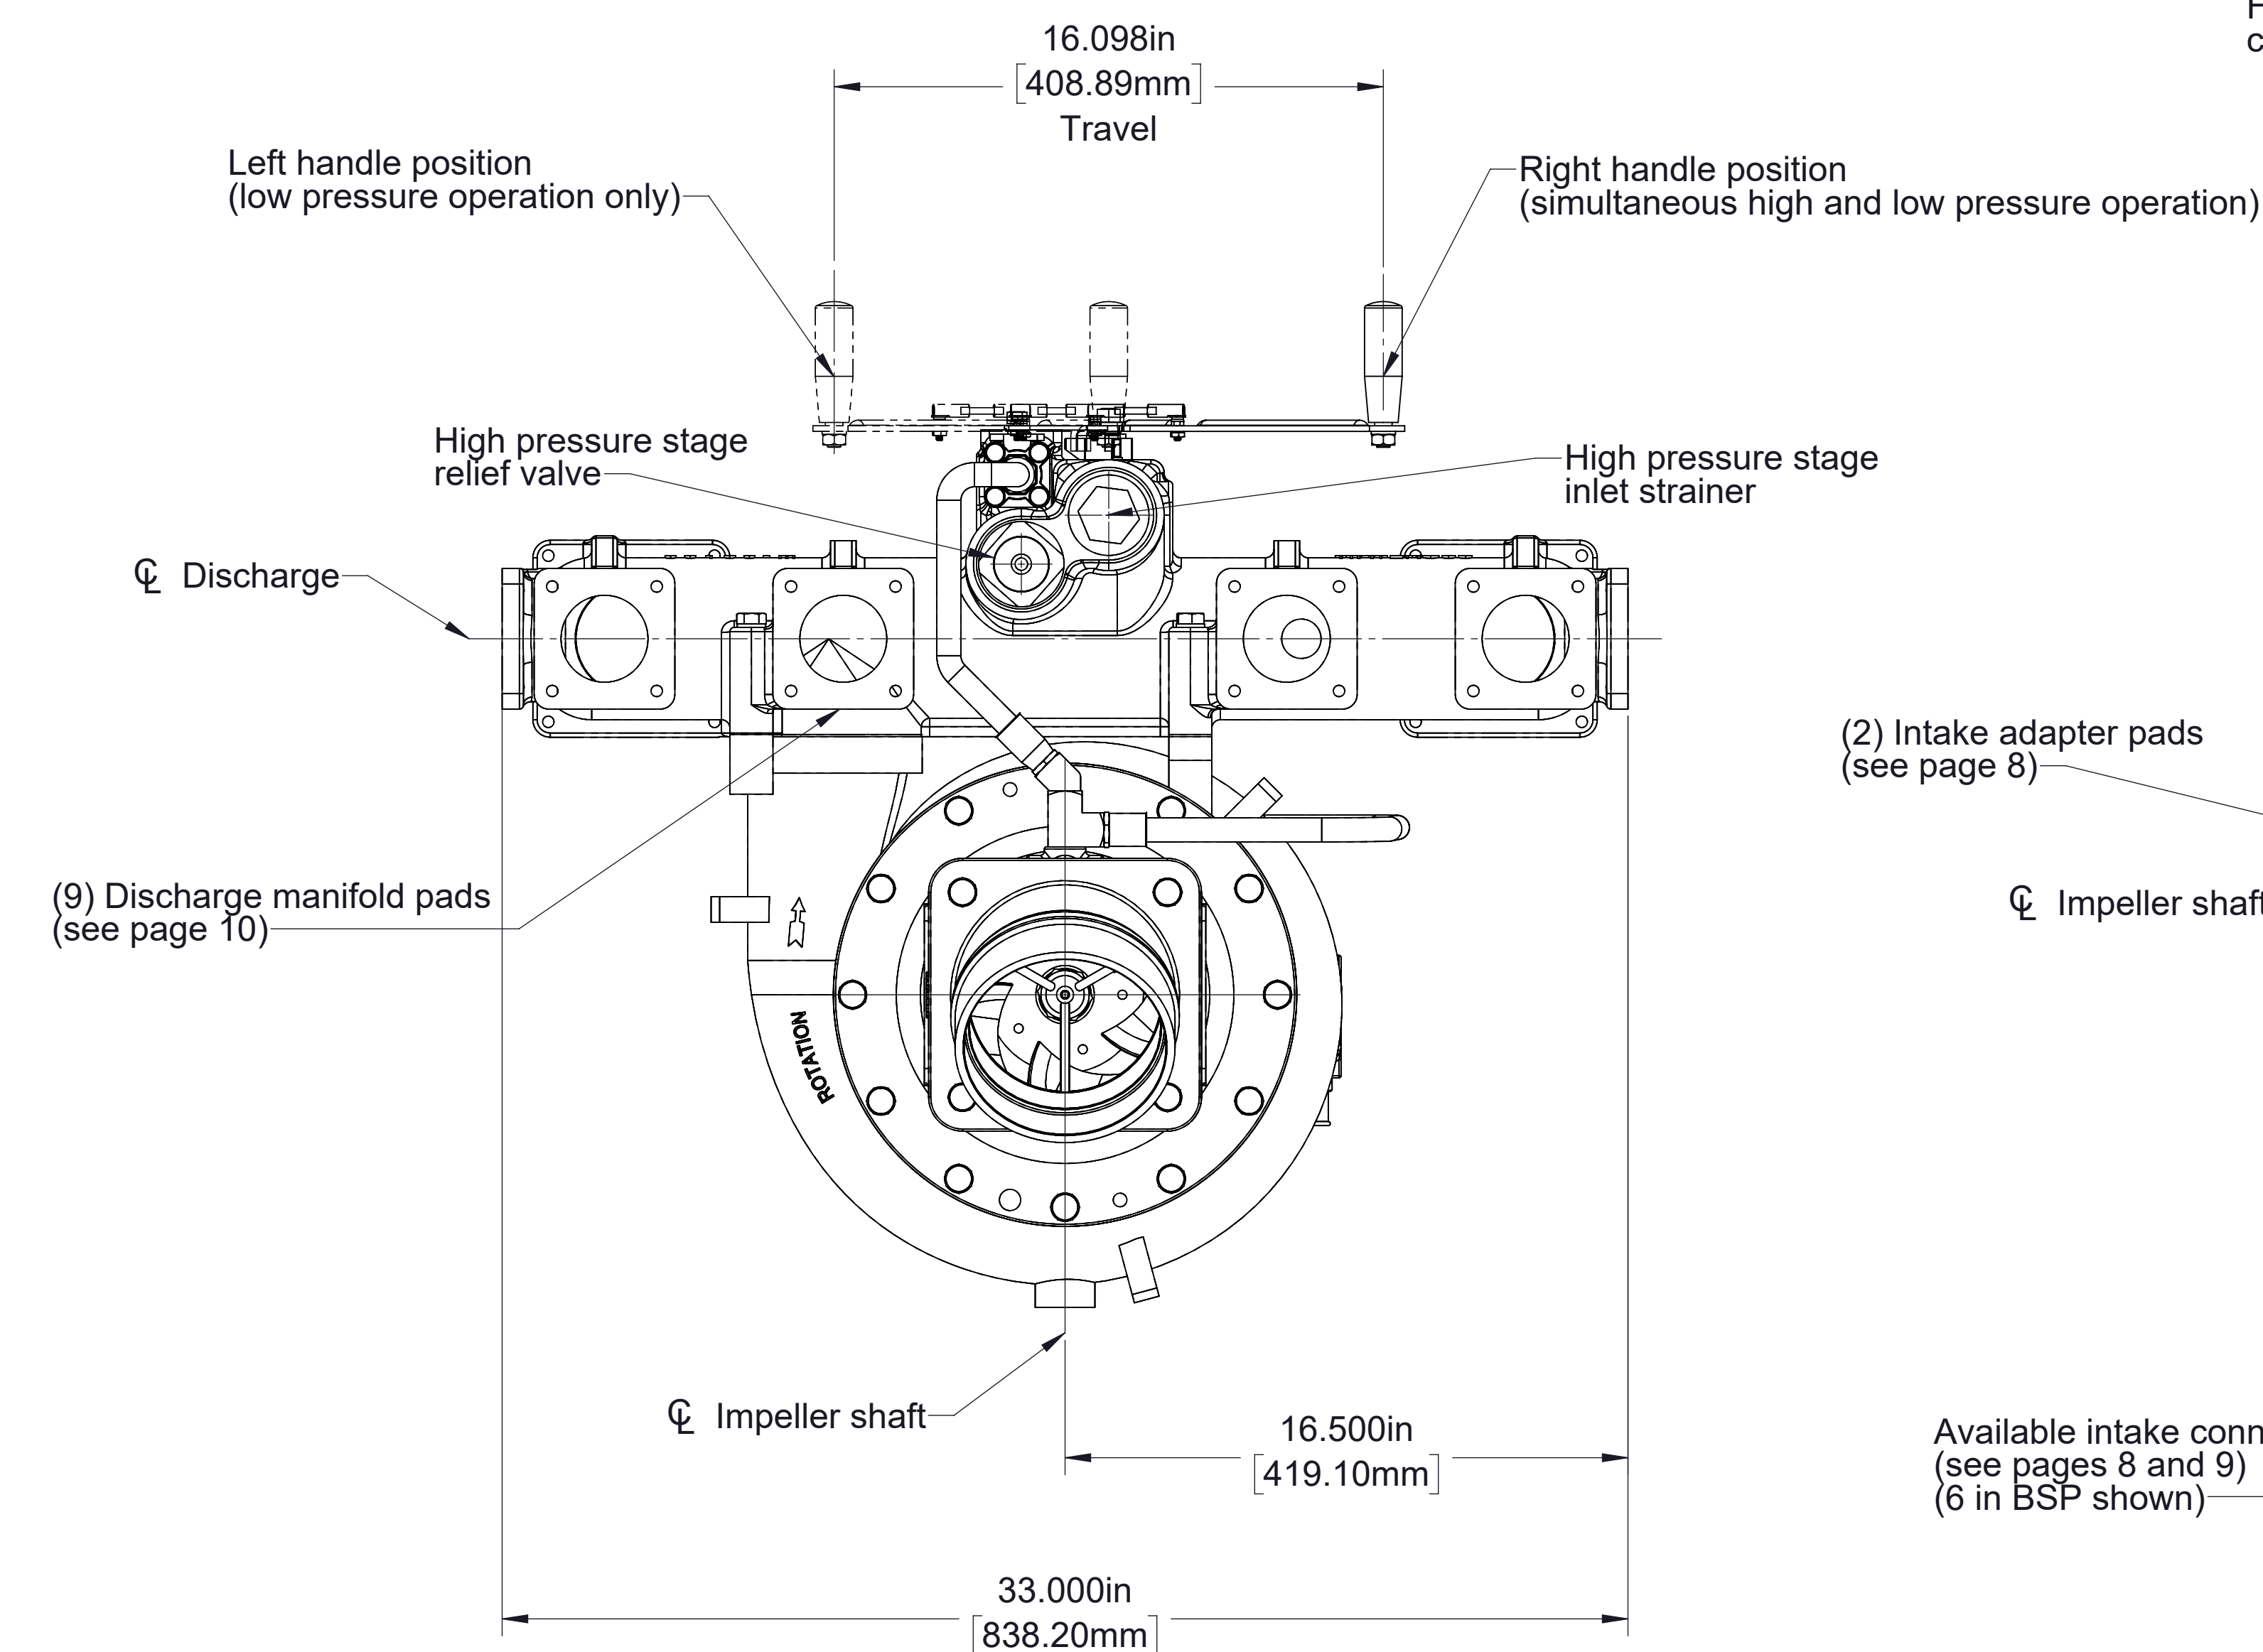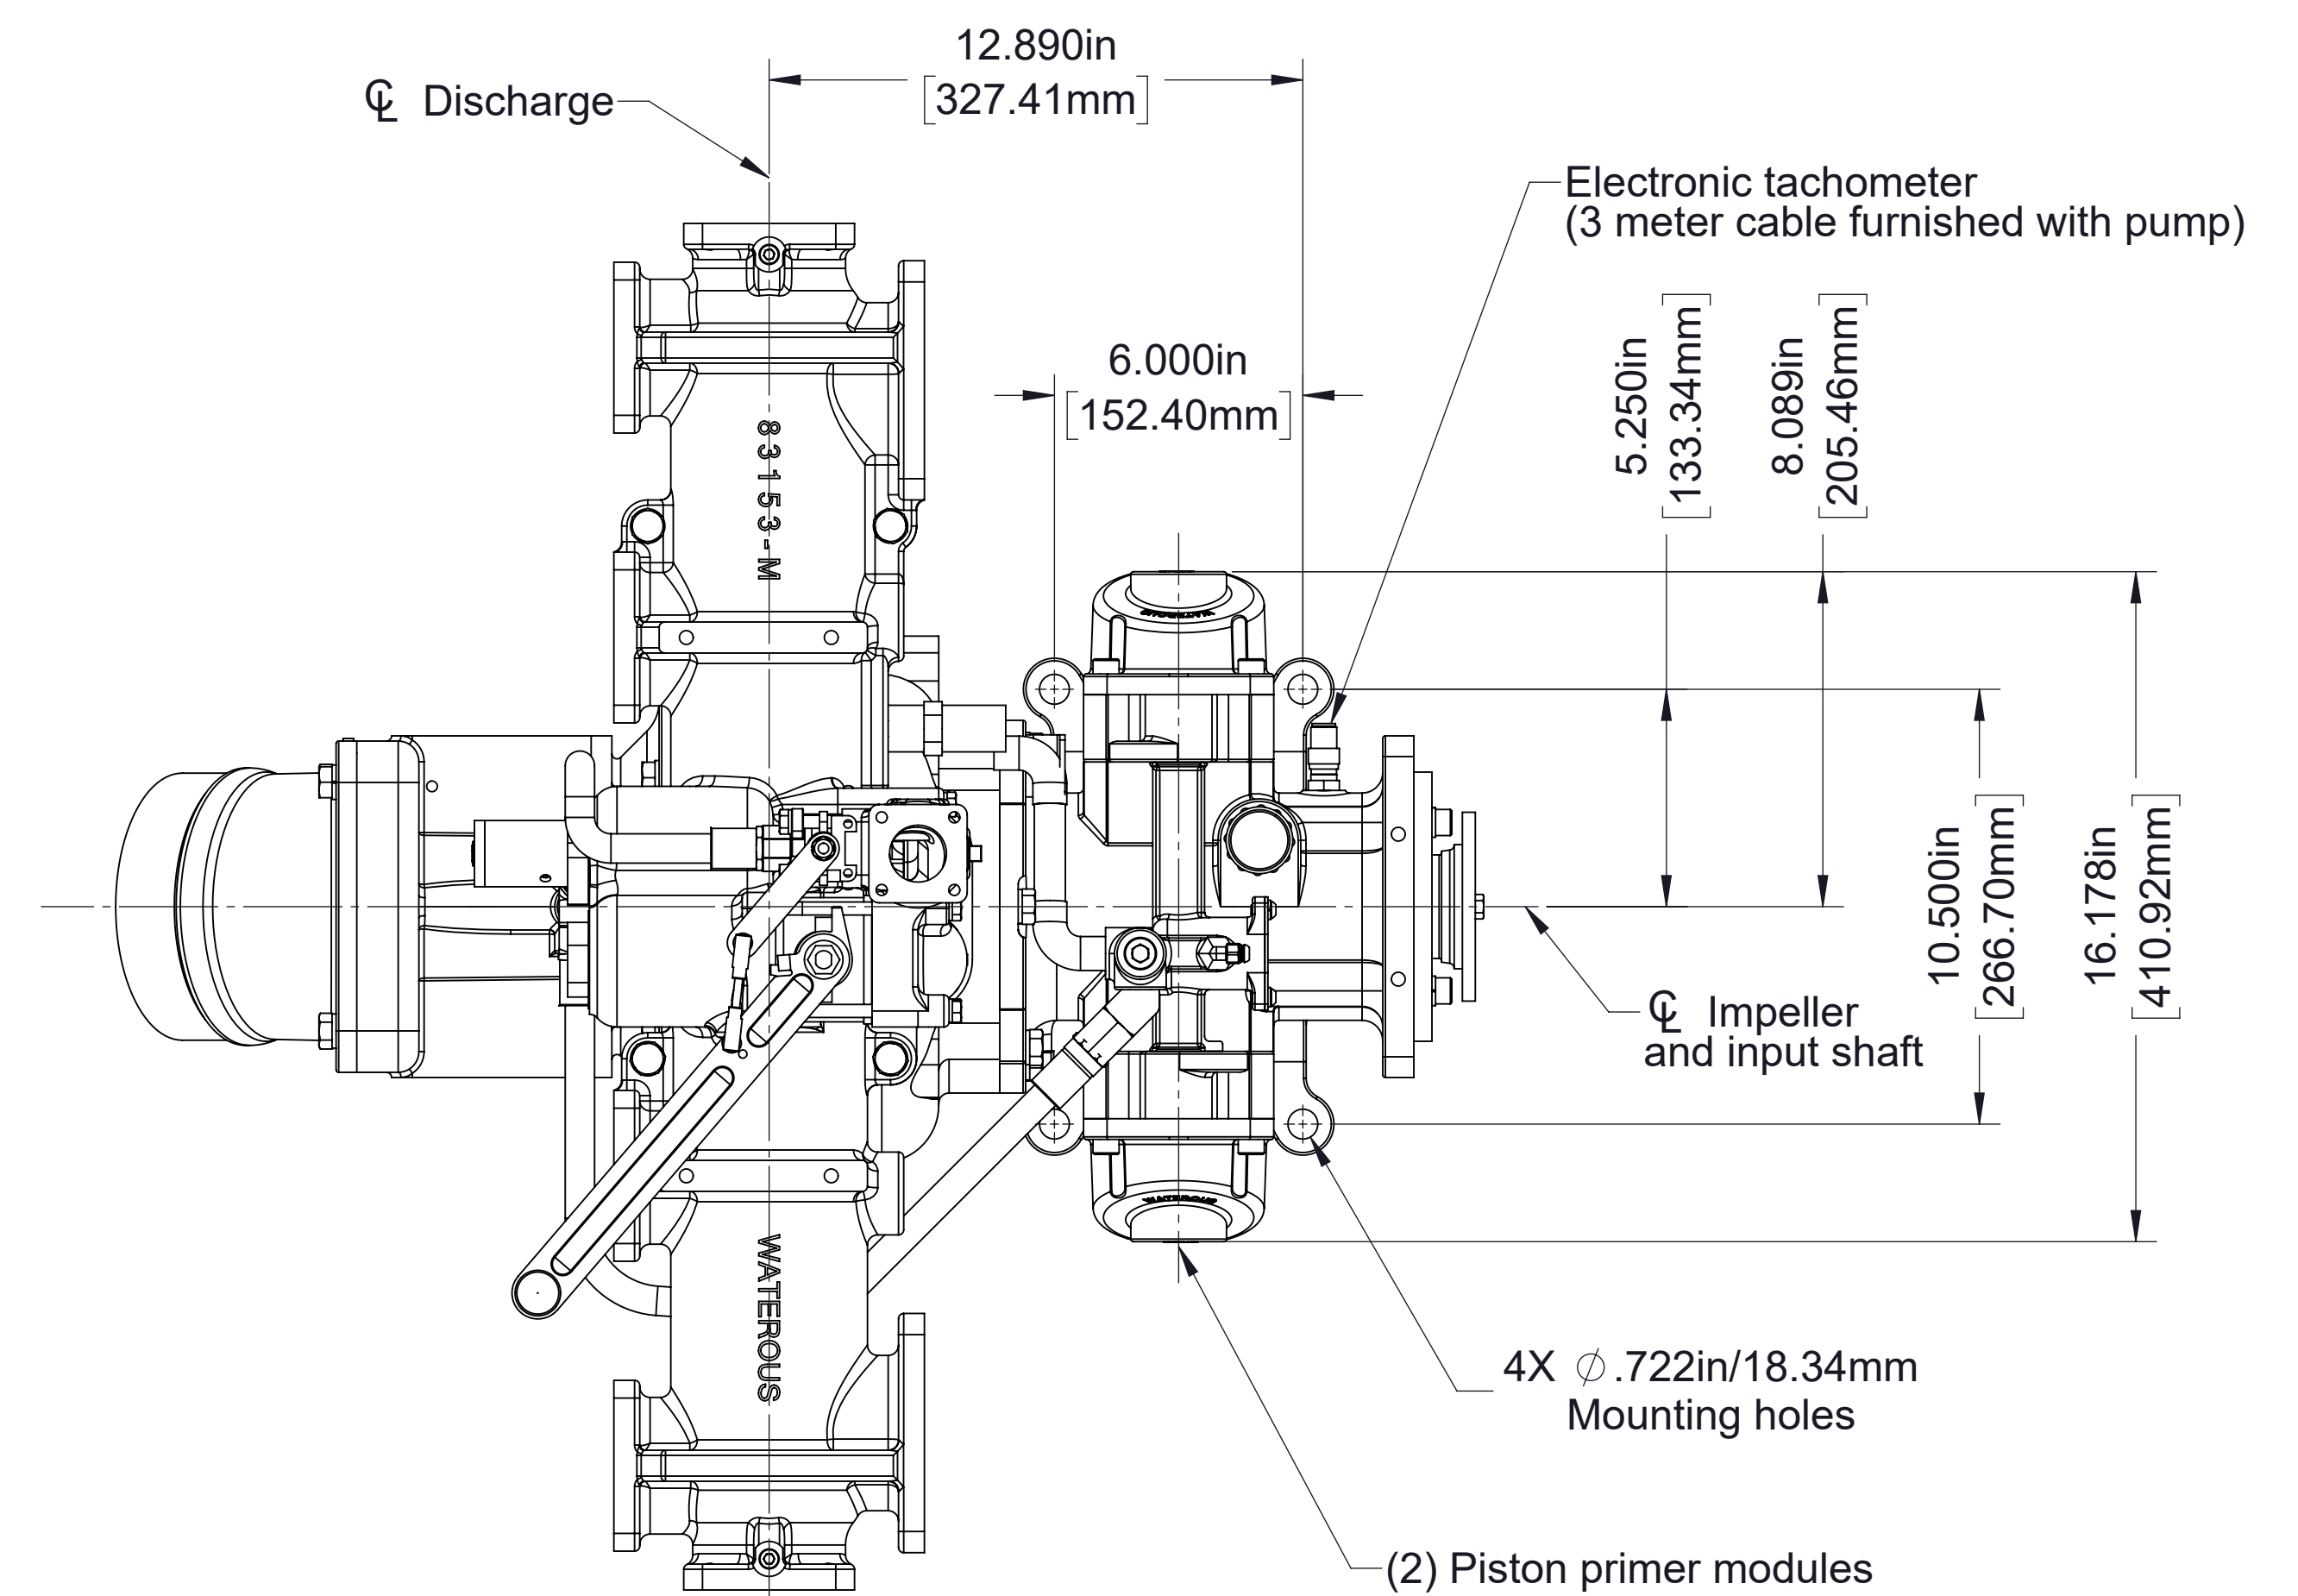


**HL400D Pump
Counter Clockwise Input Rotation**

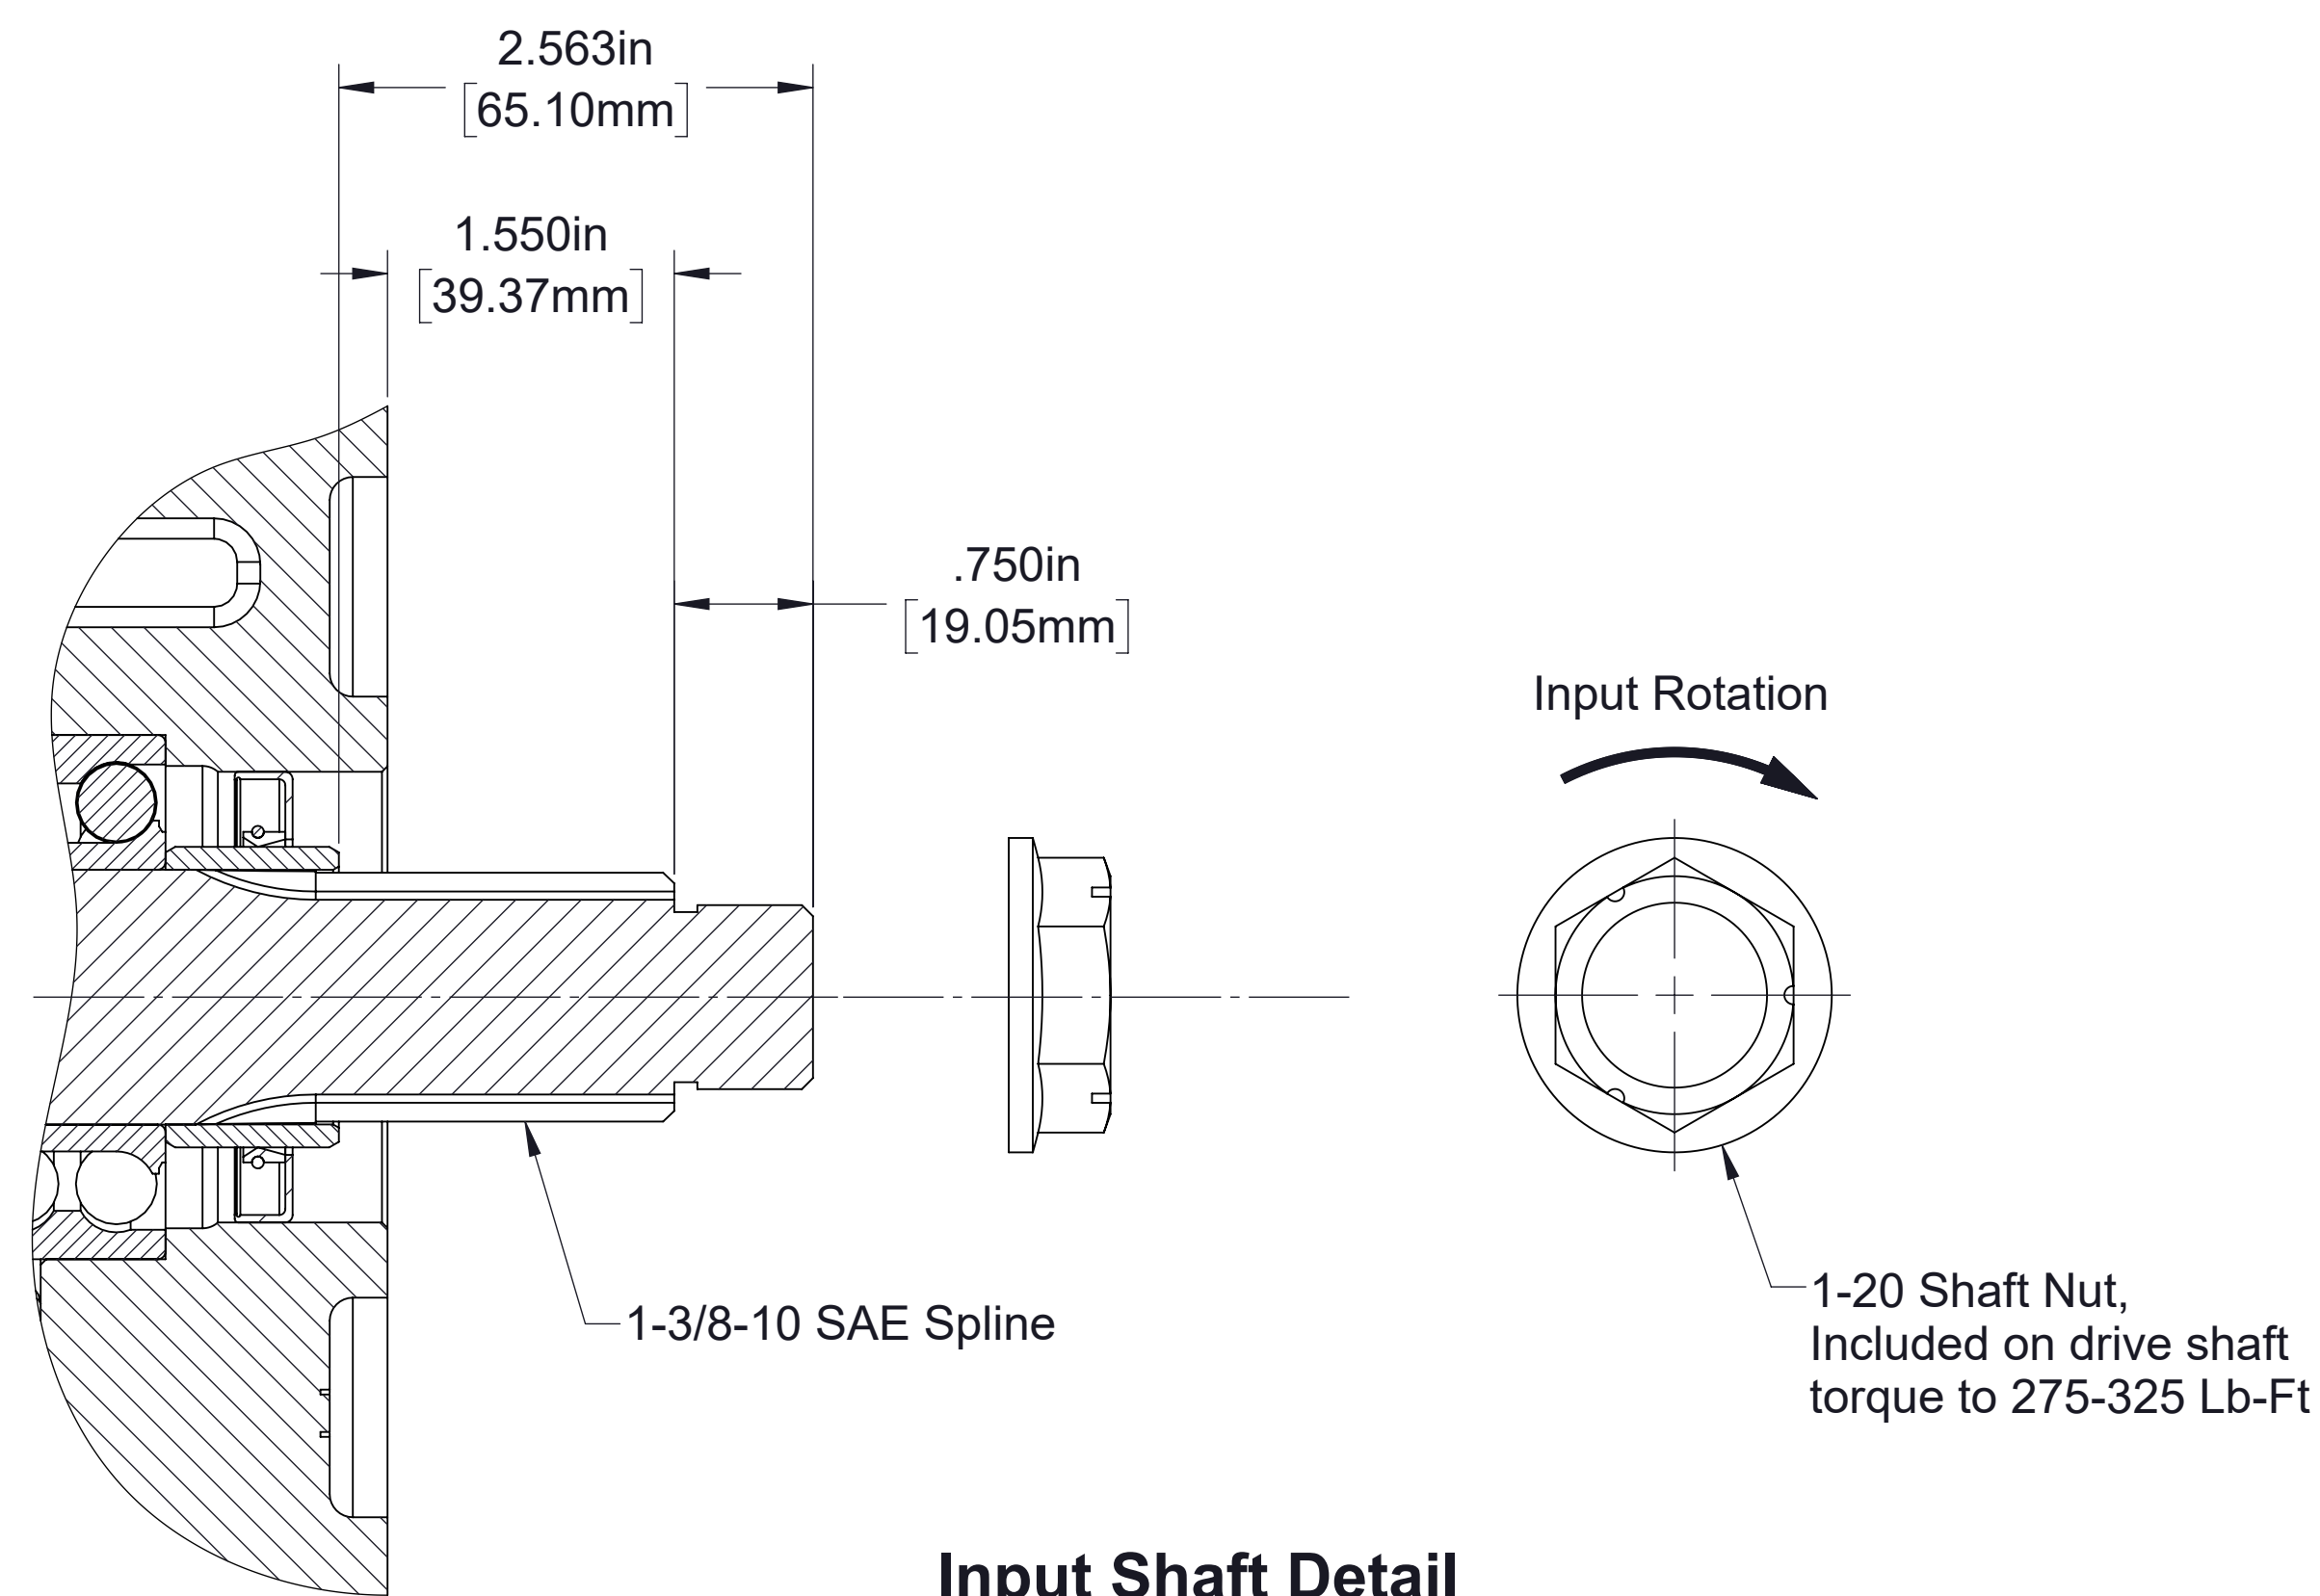




Input Shaft Detail

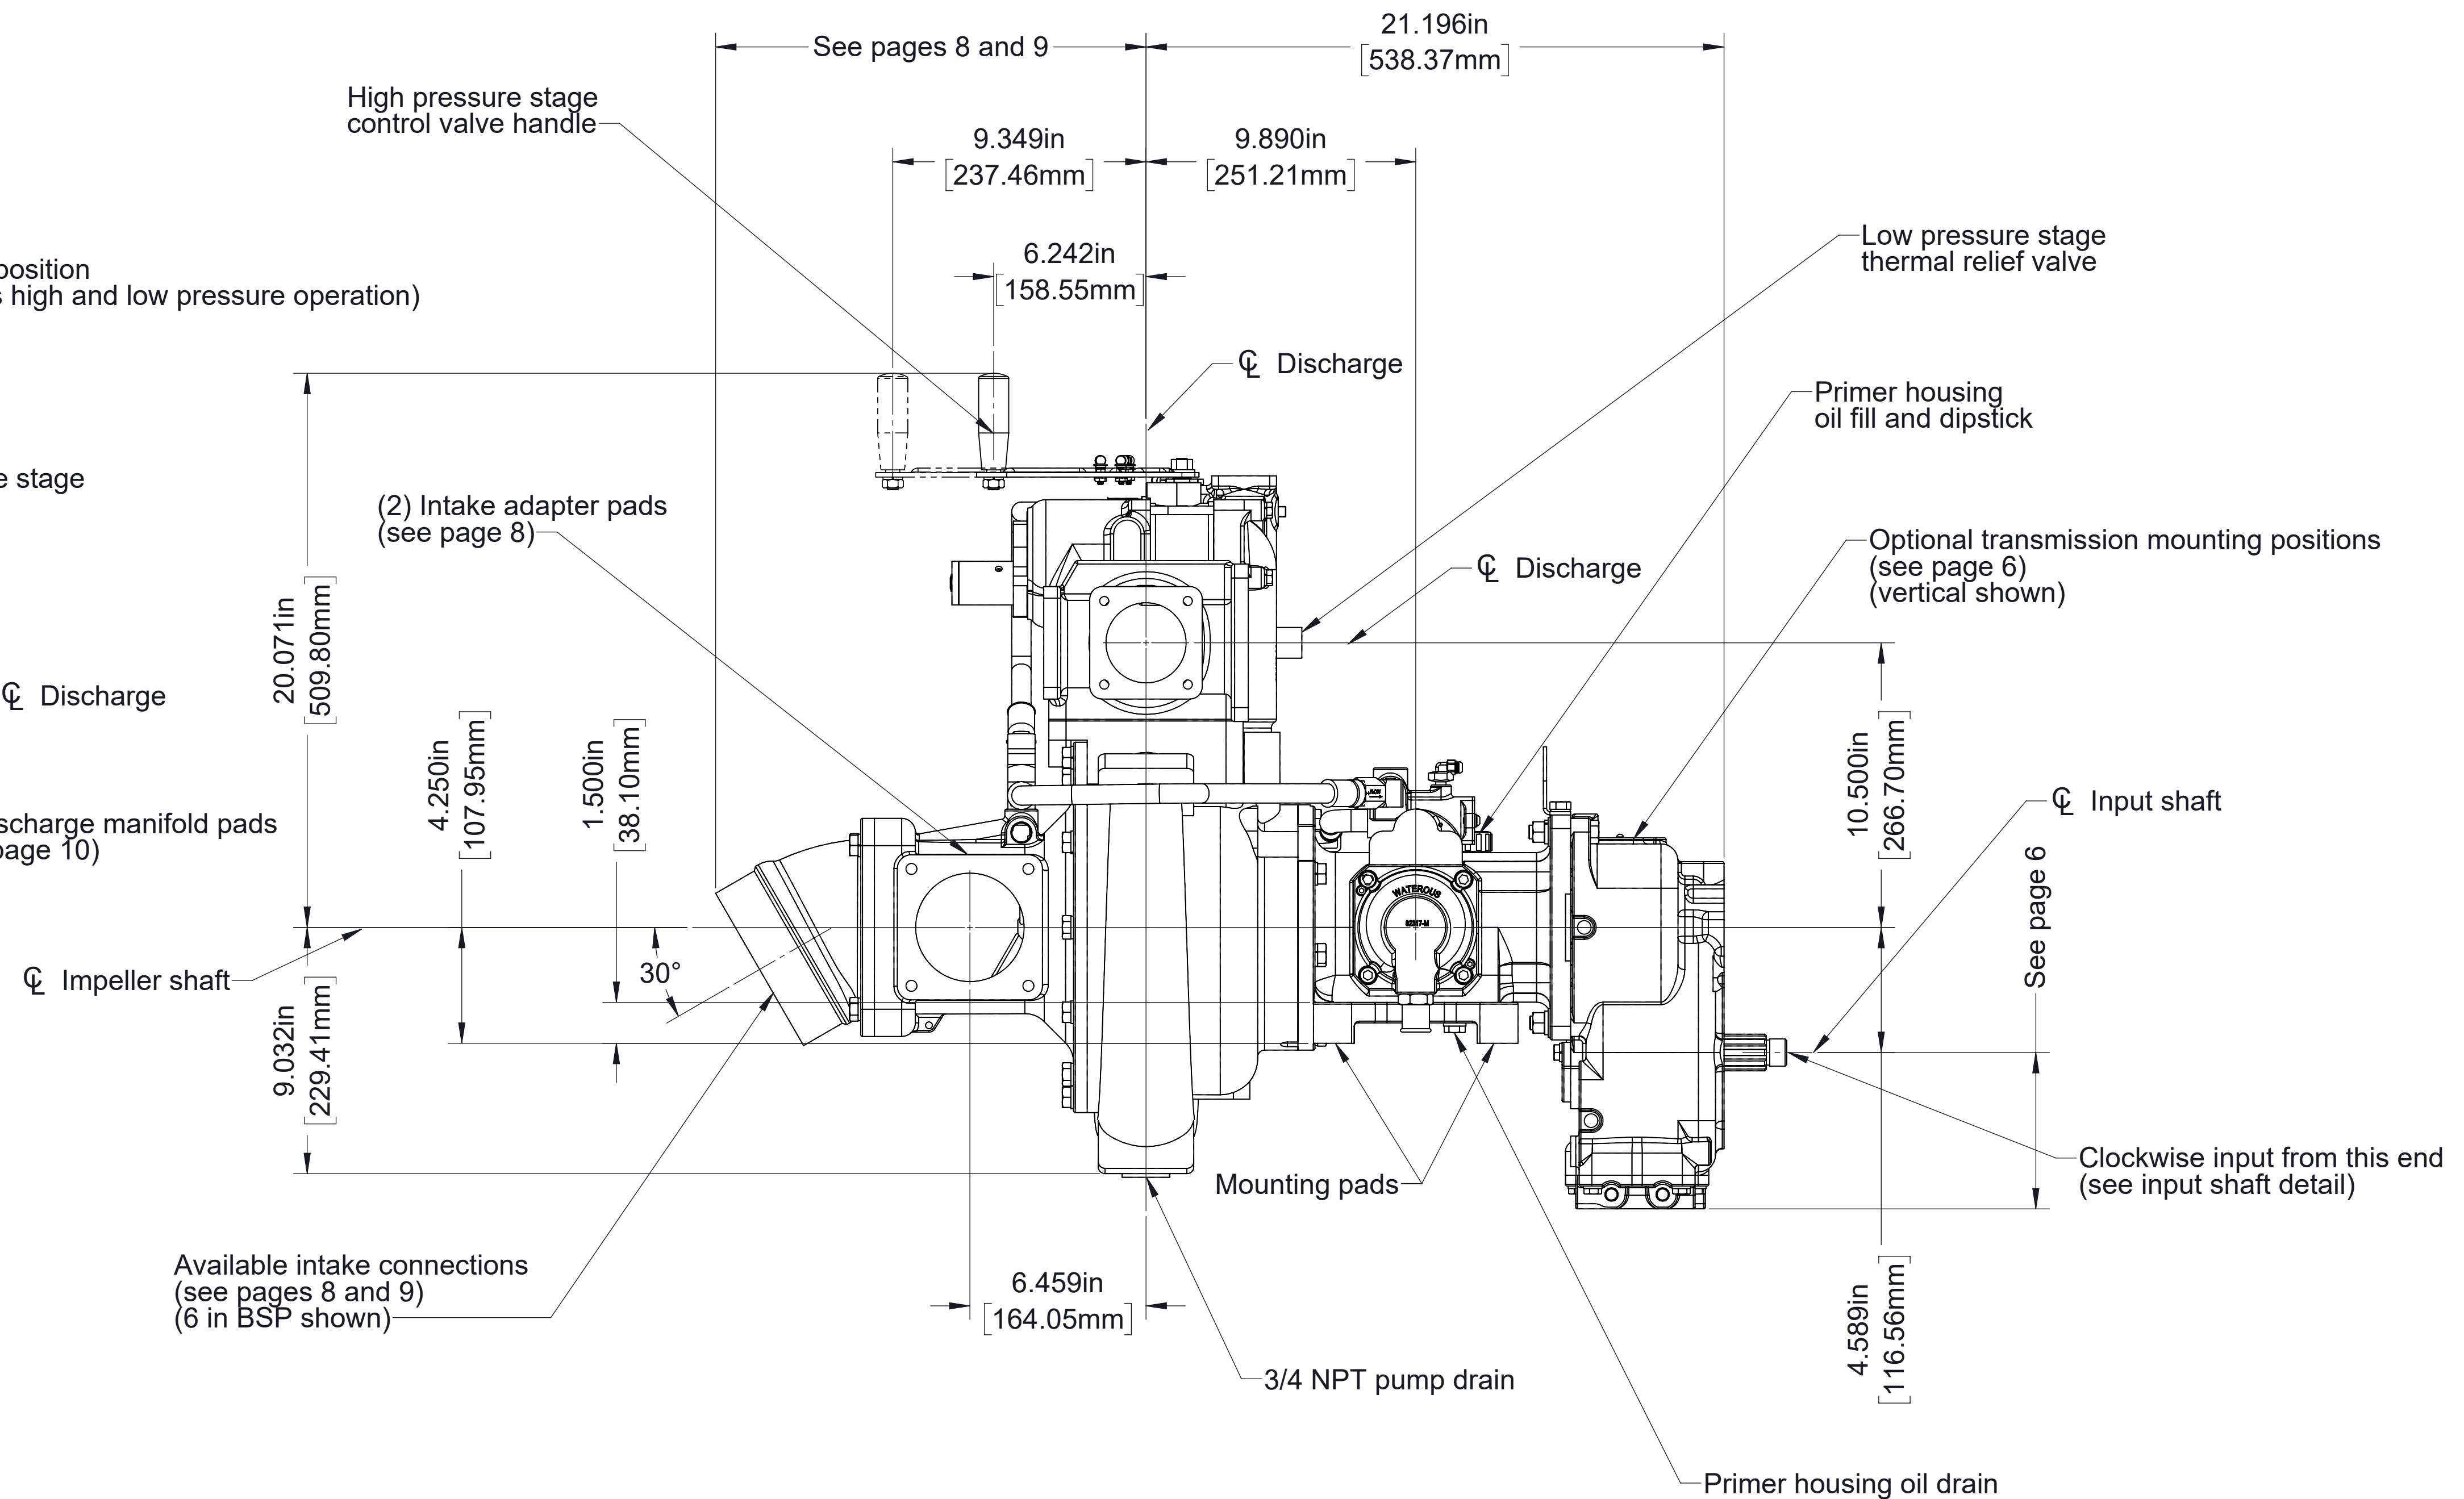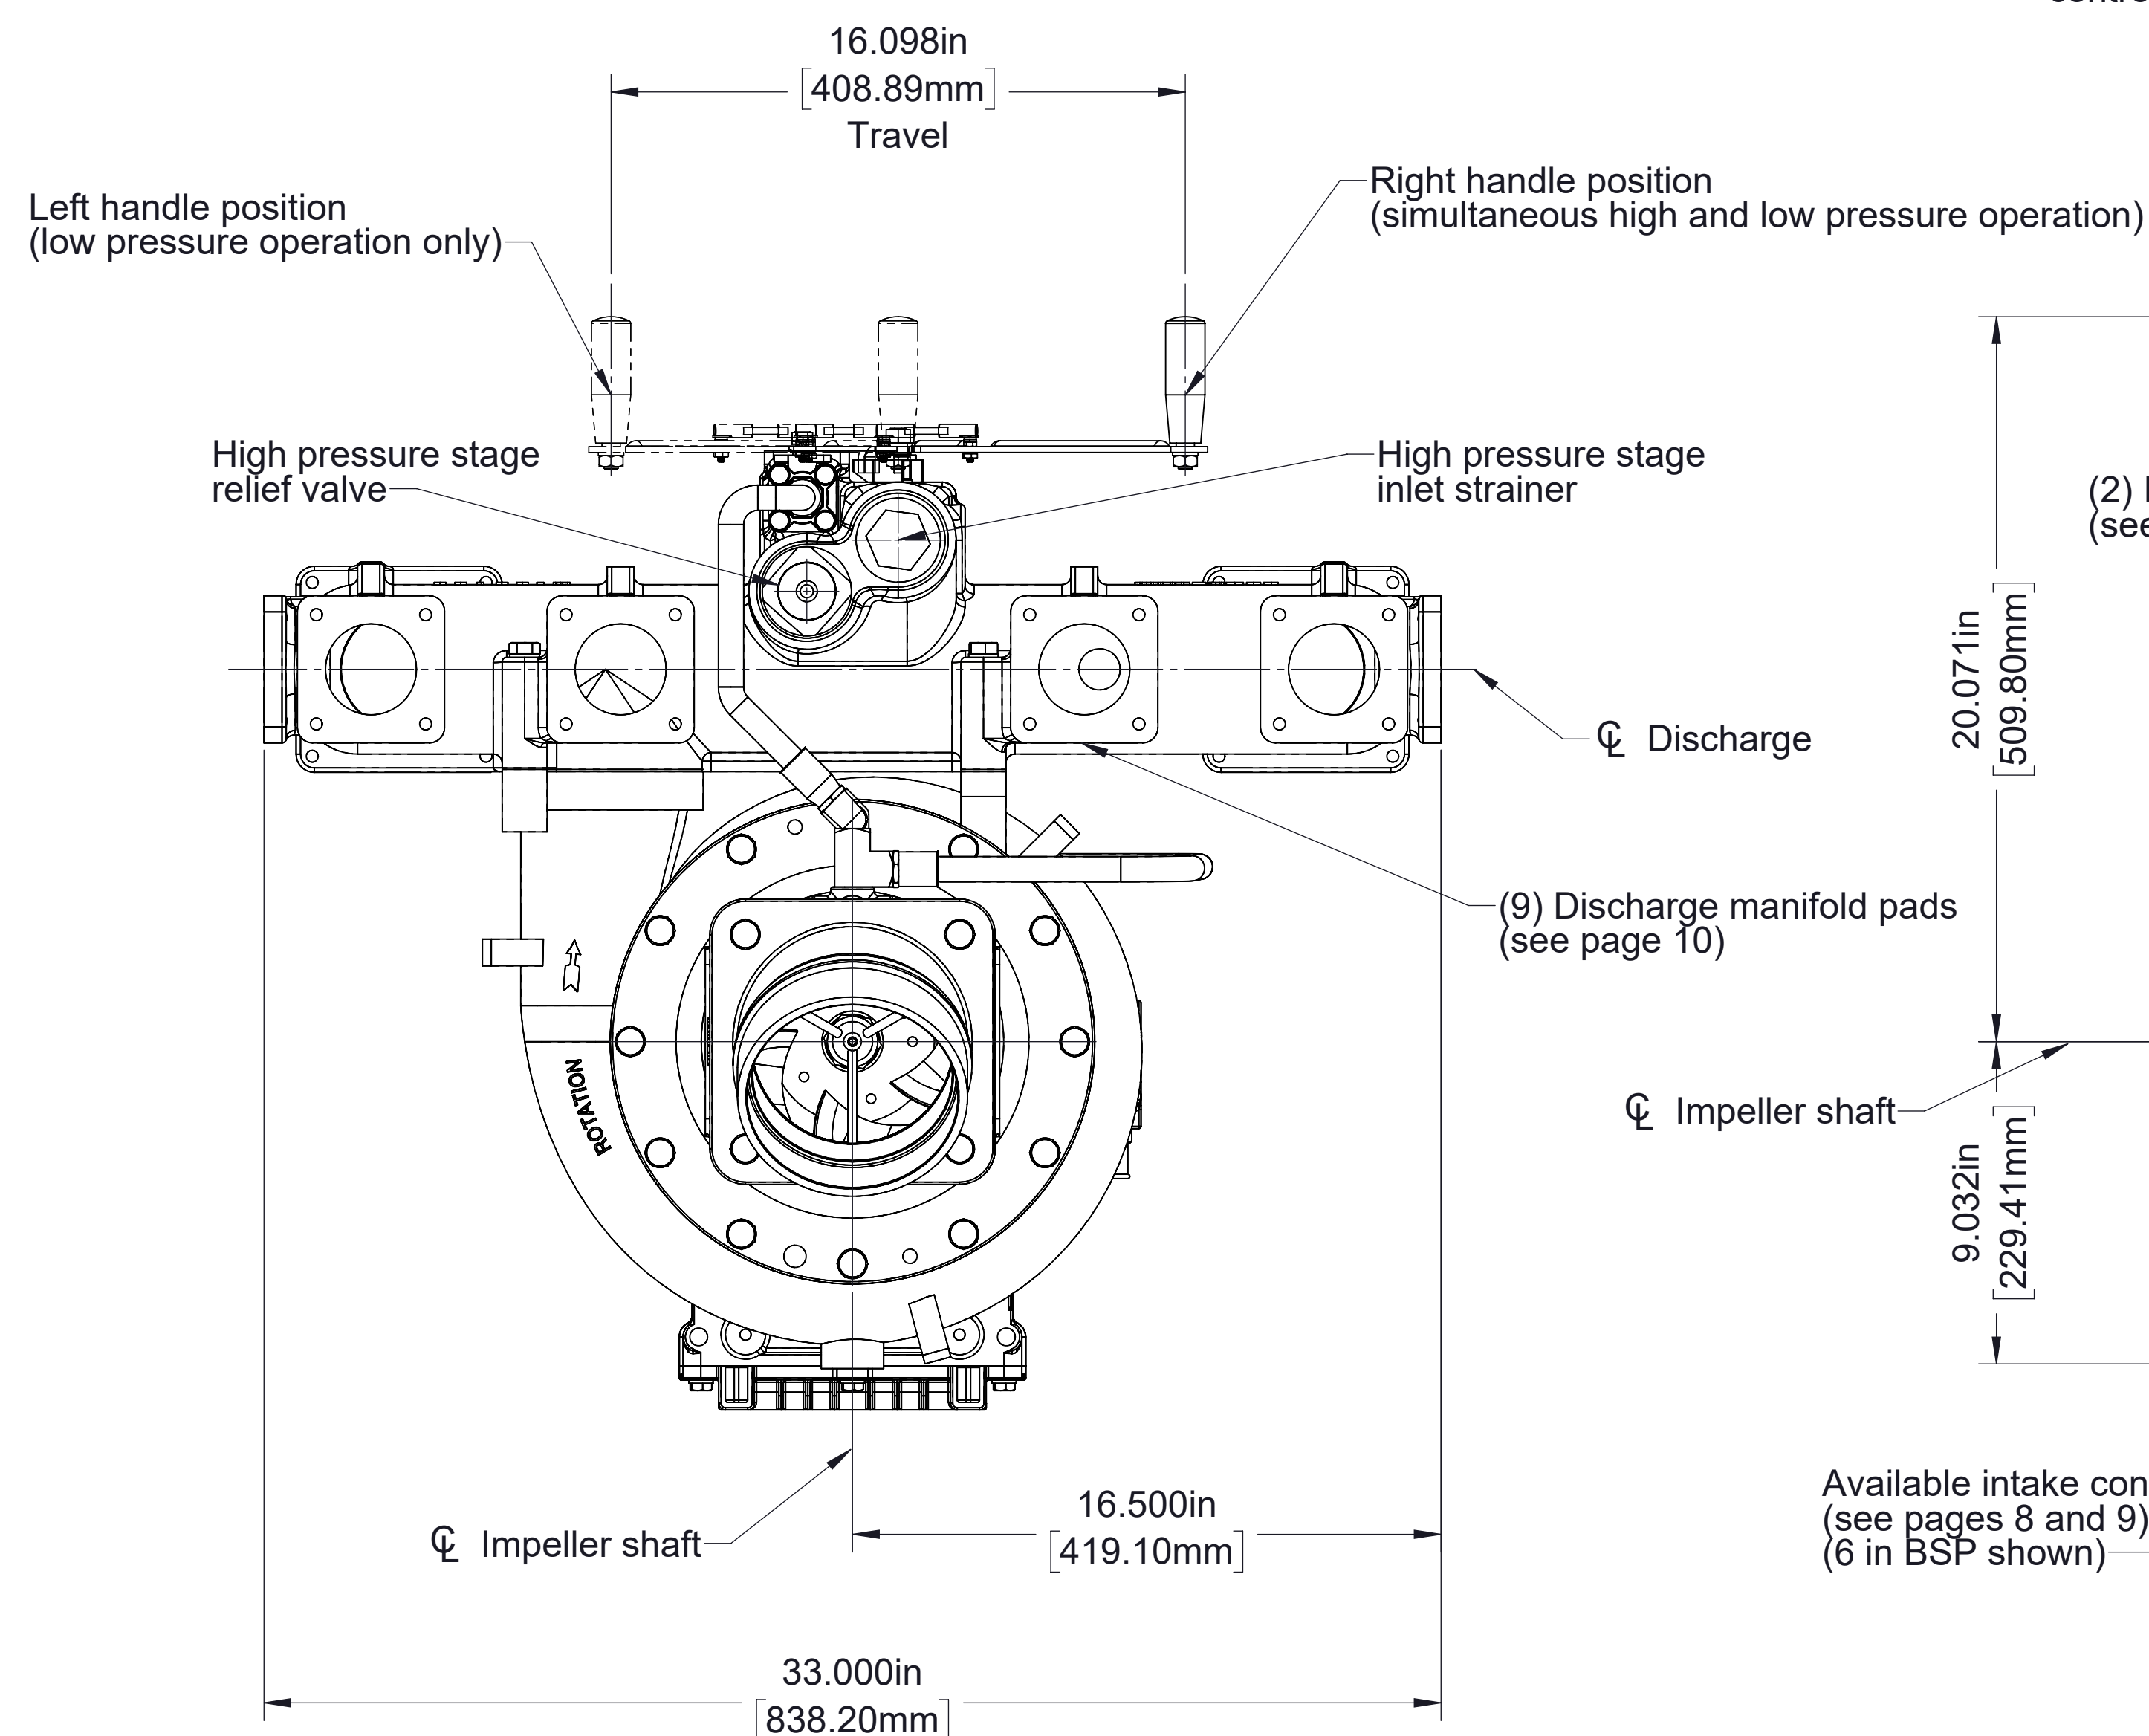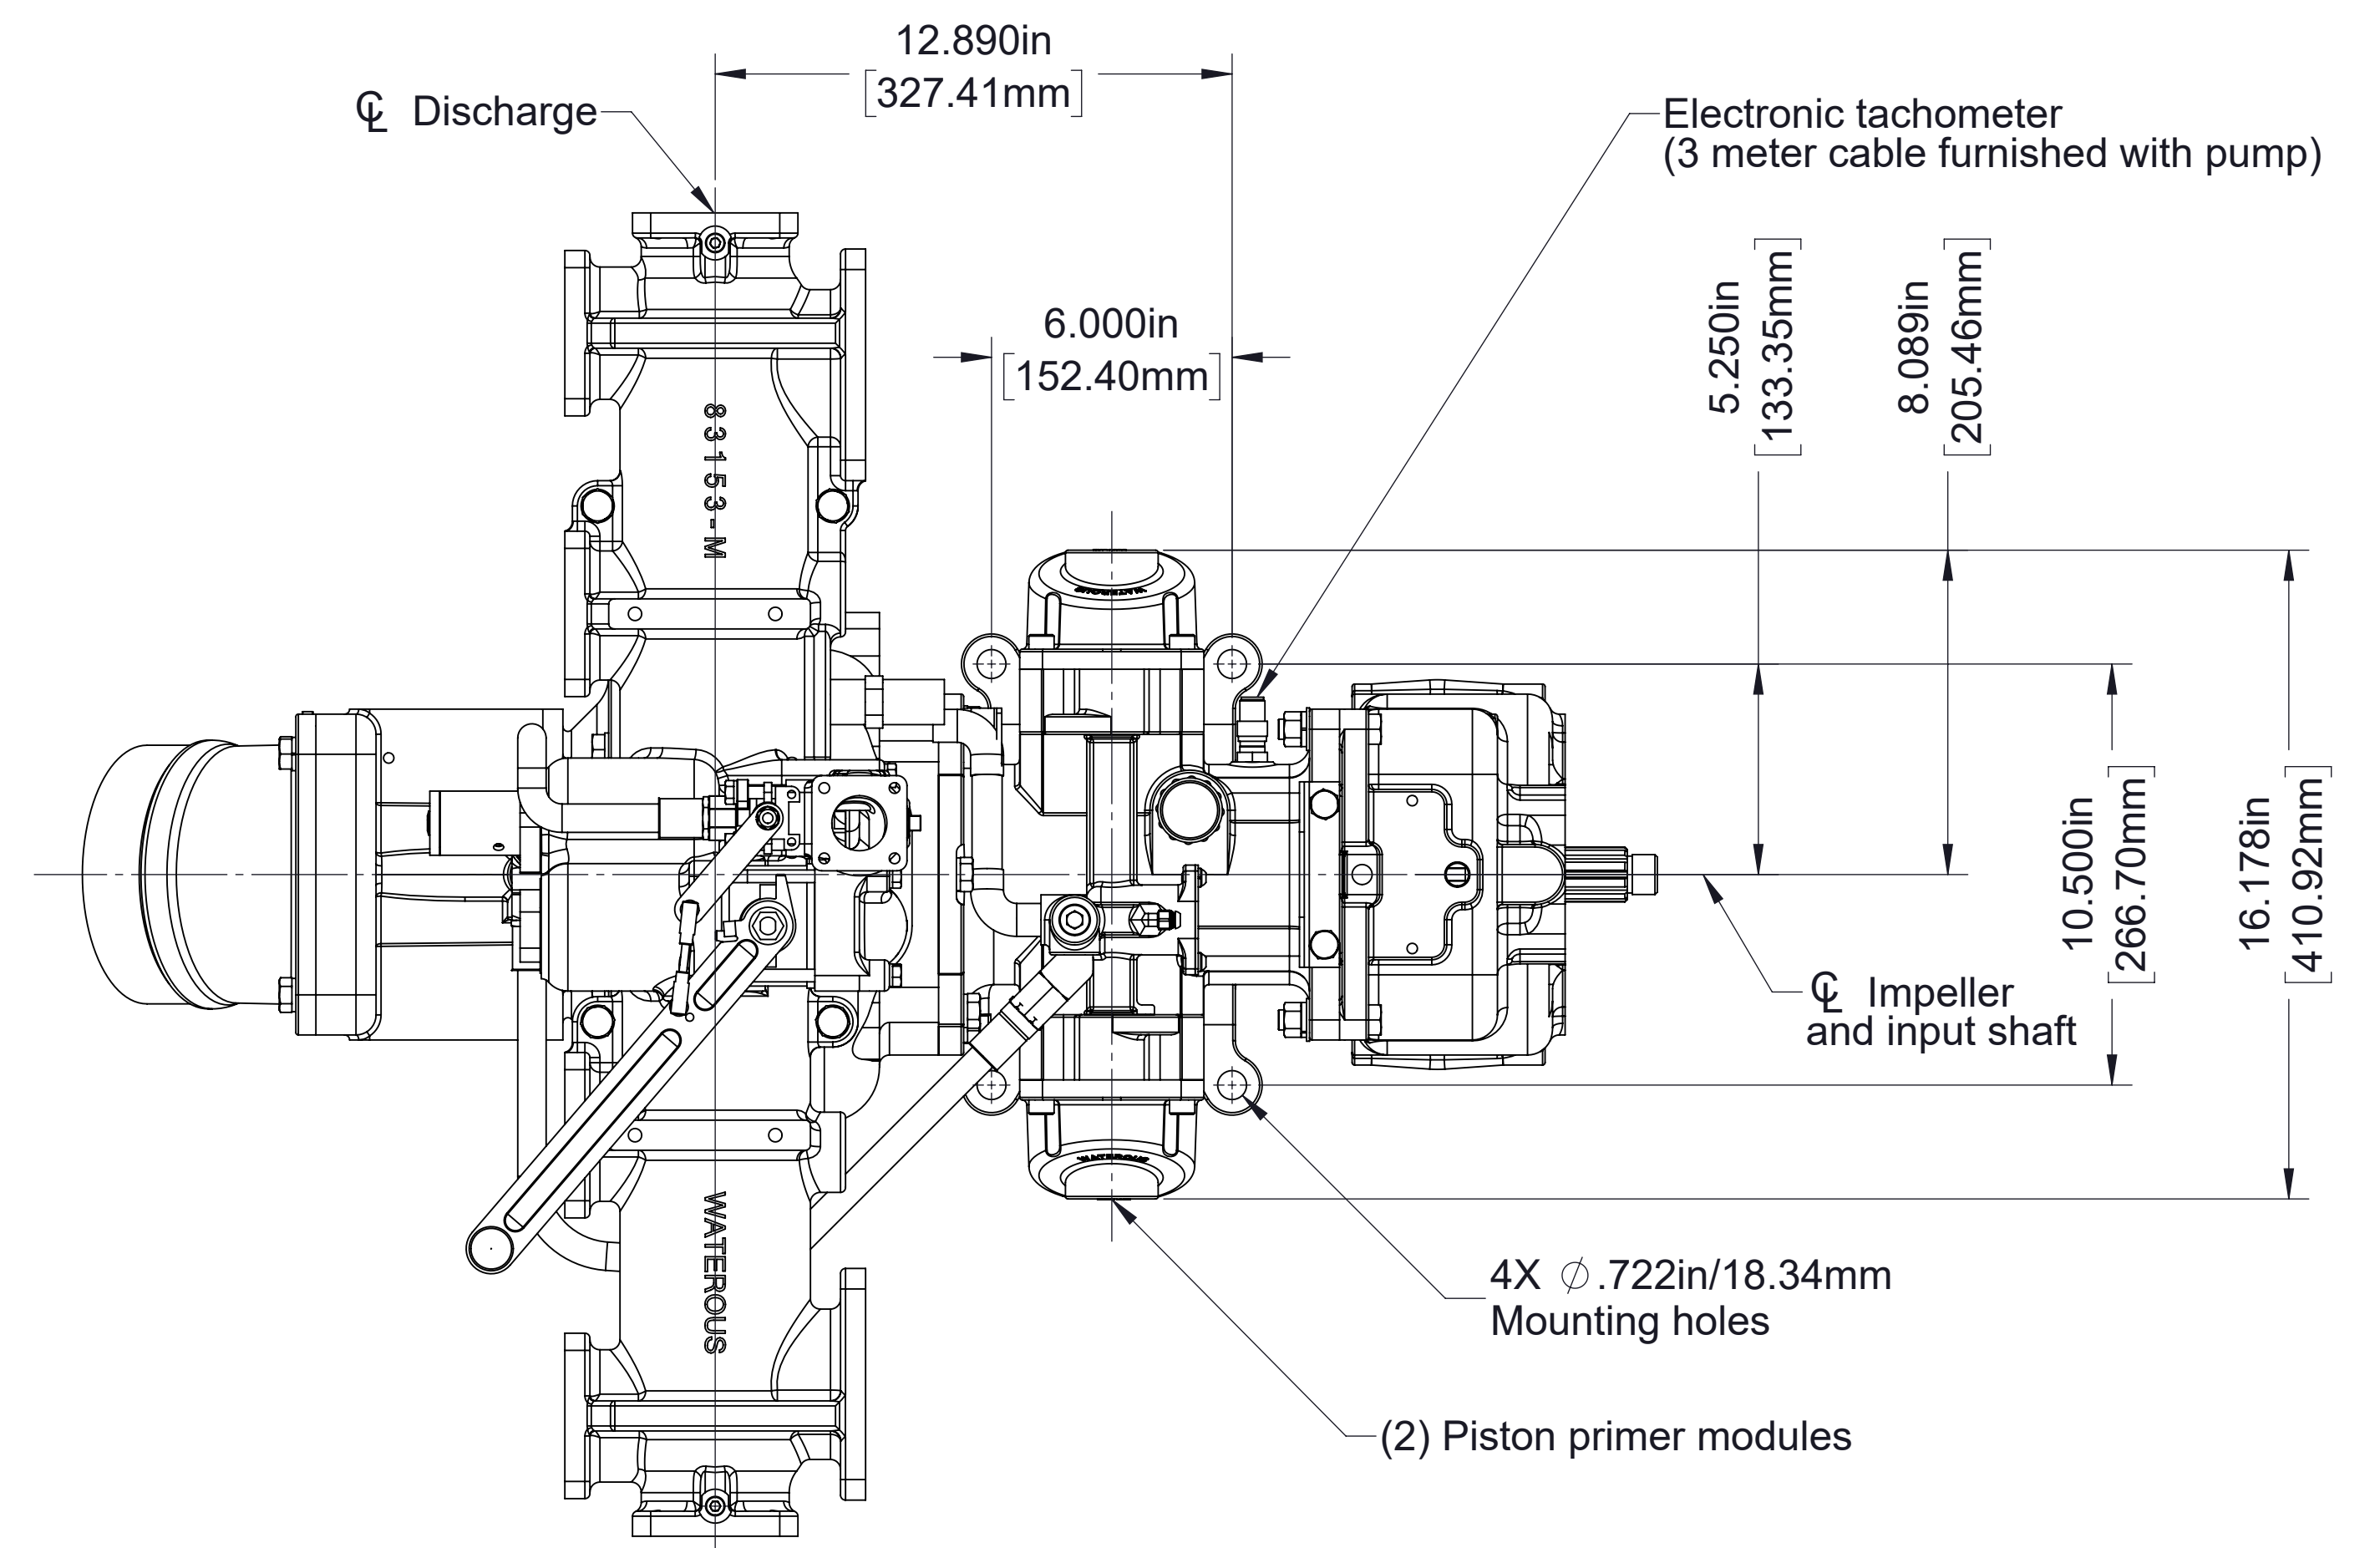


**HL400K Pump
Clockwise Input Rotation**

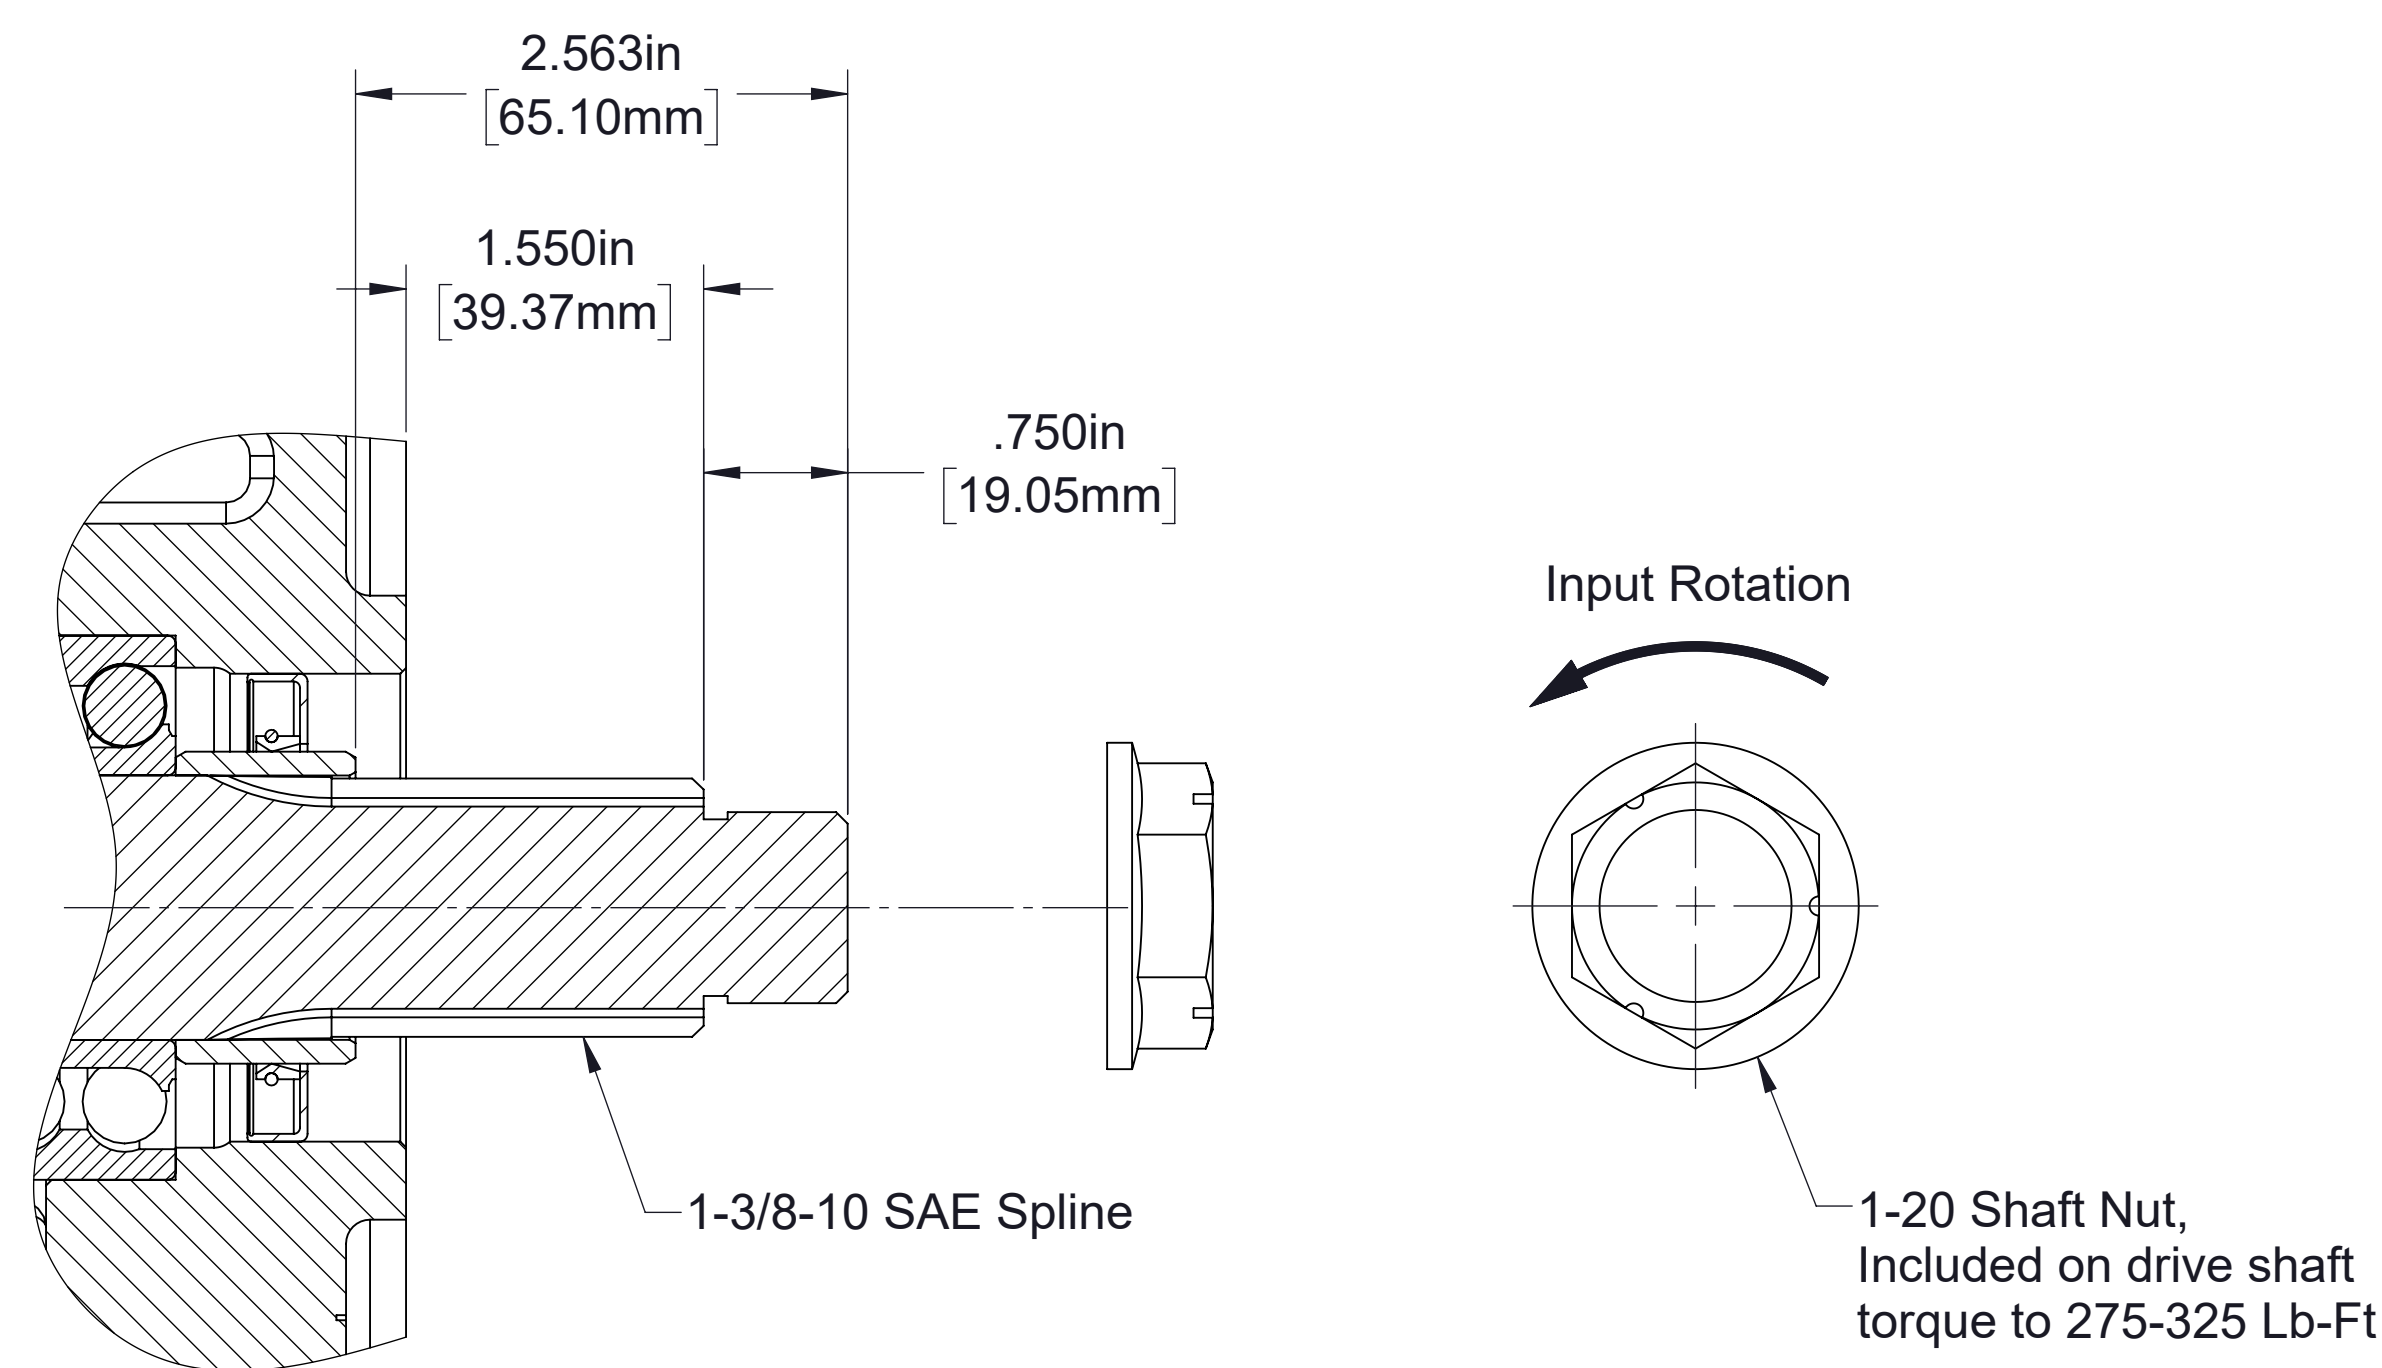


Input Shaft Detail

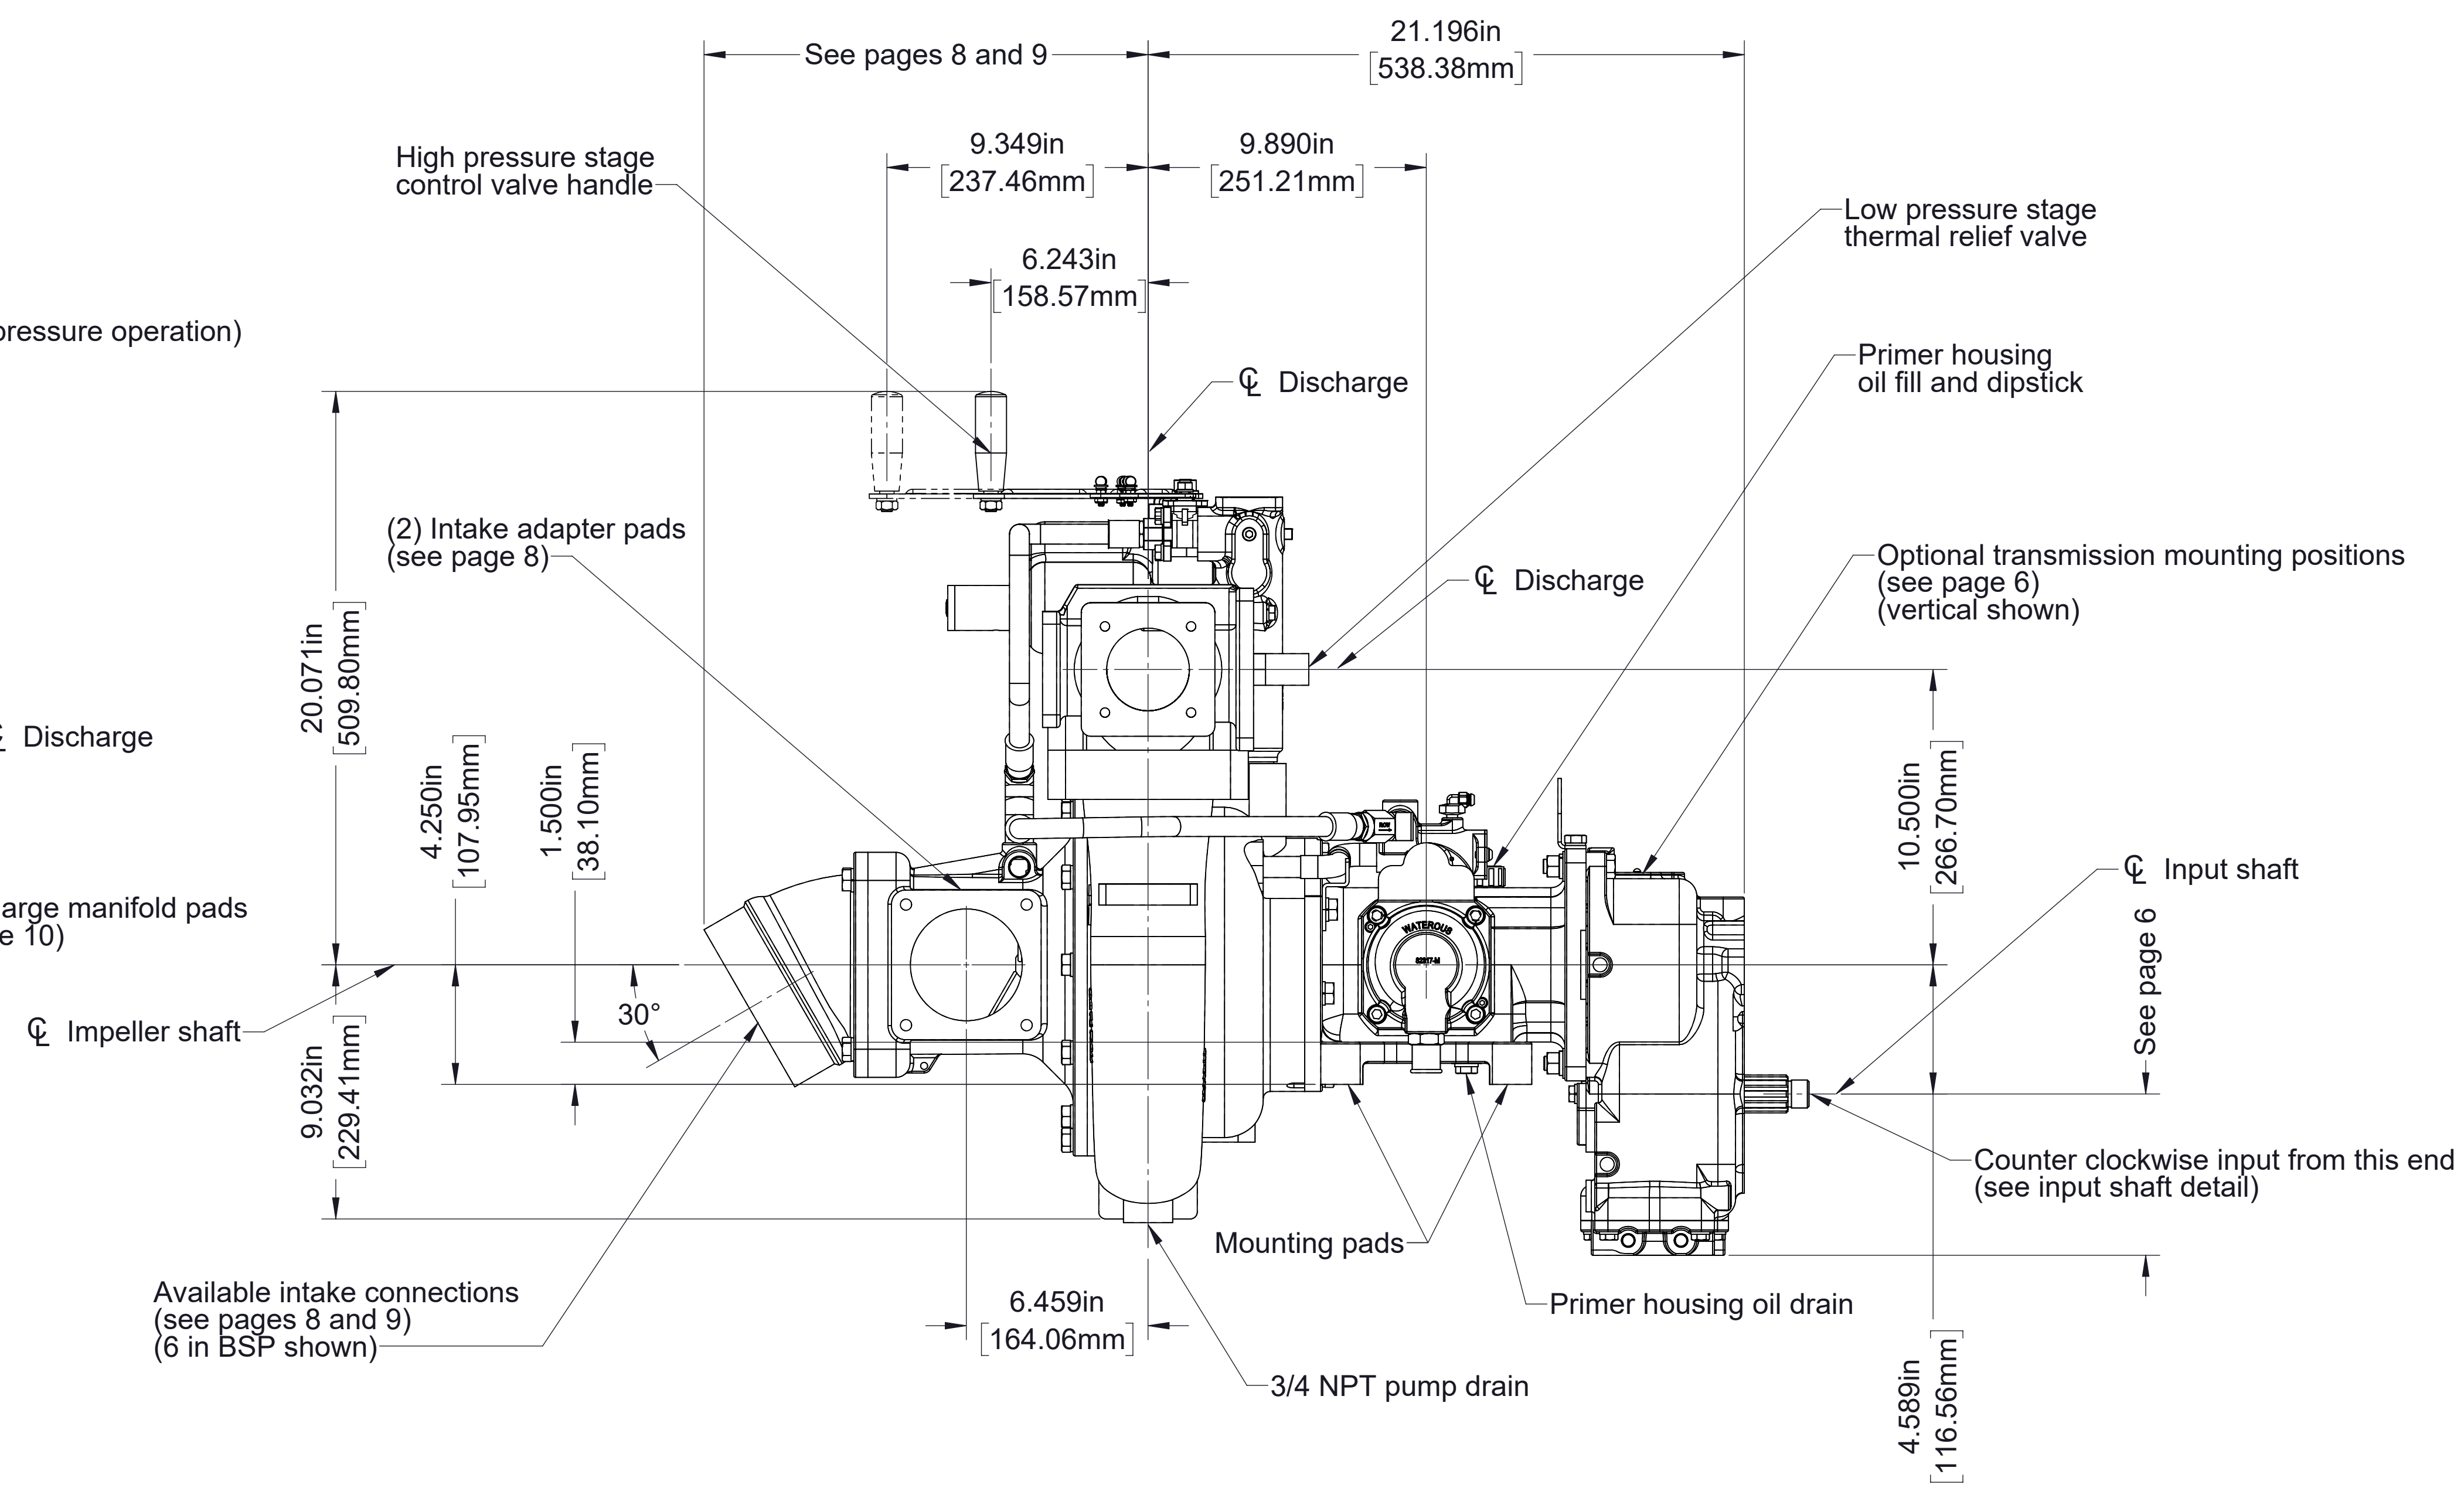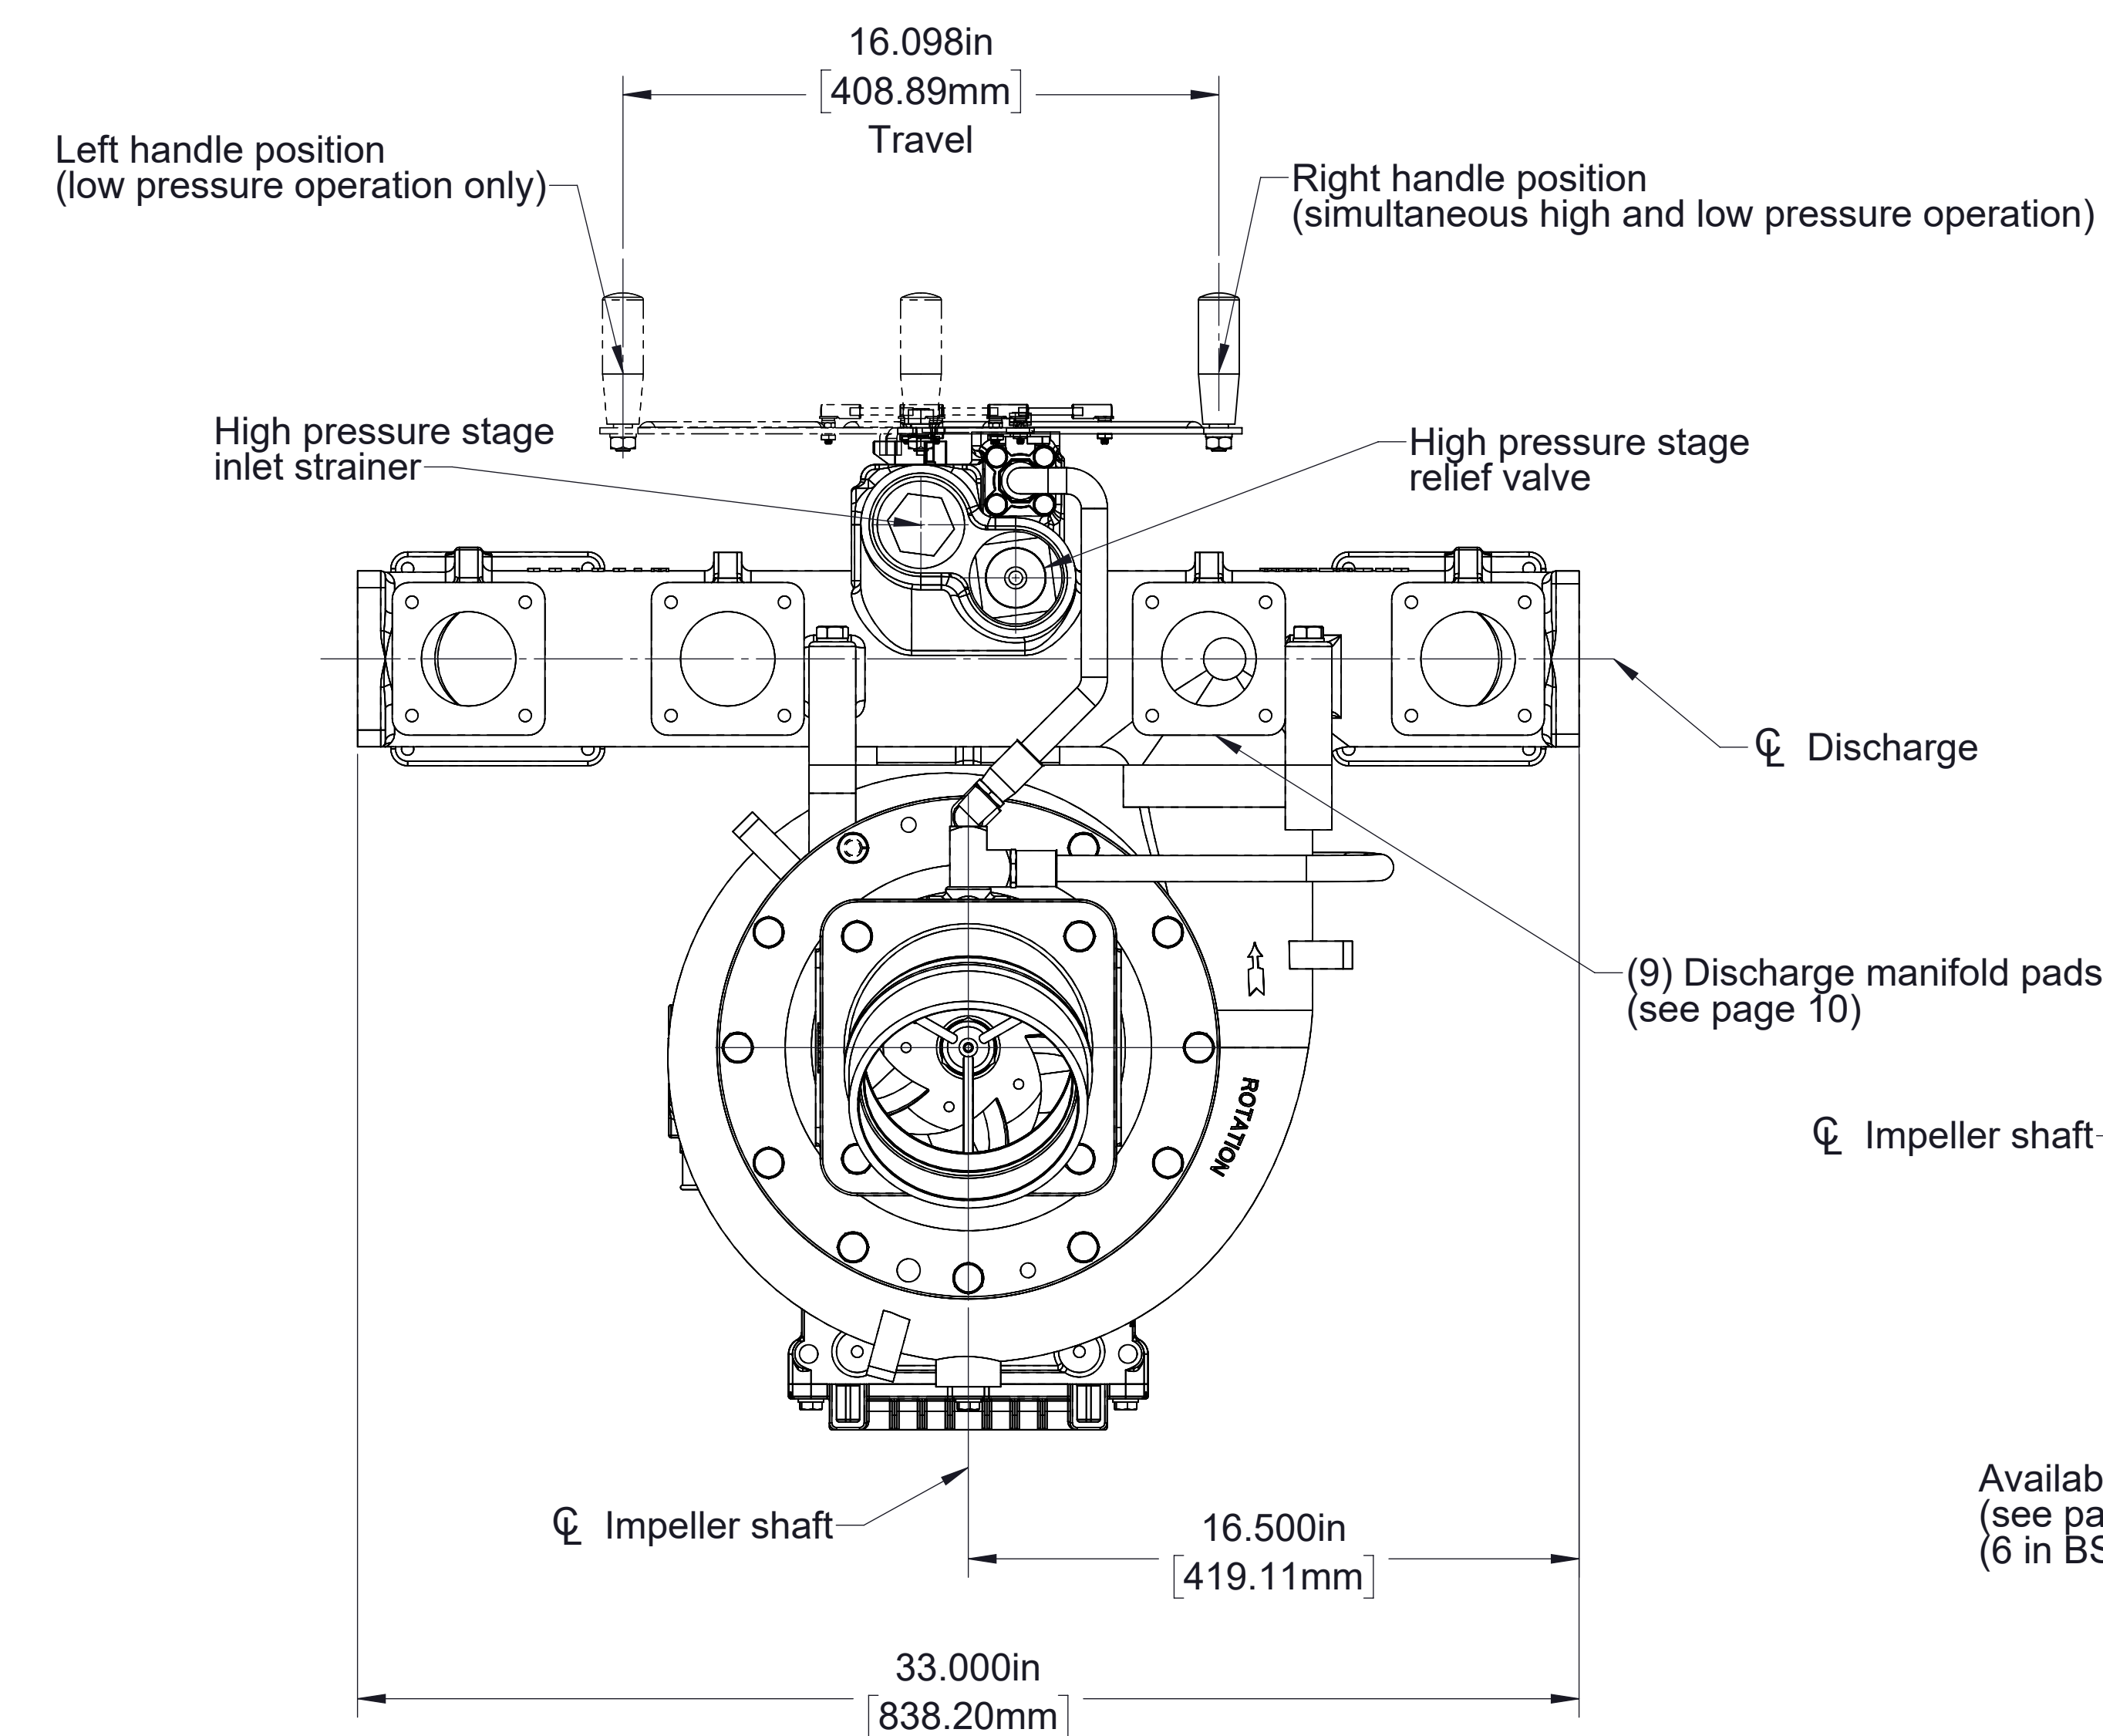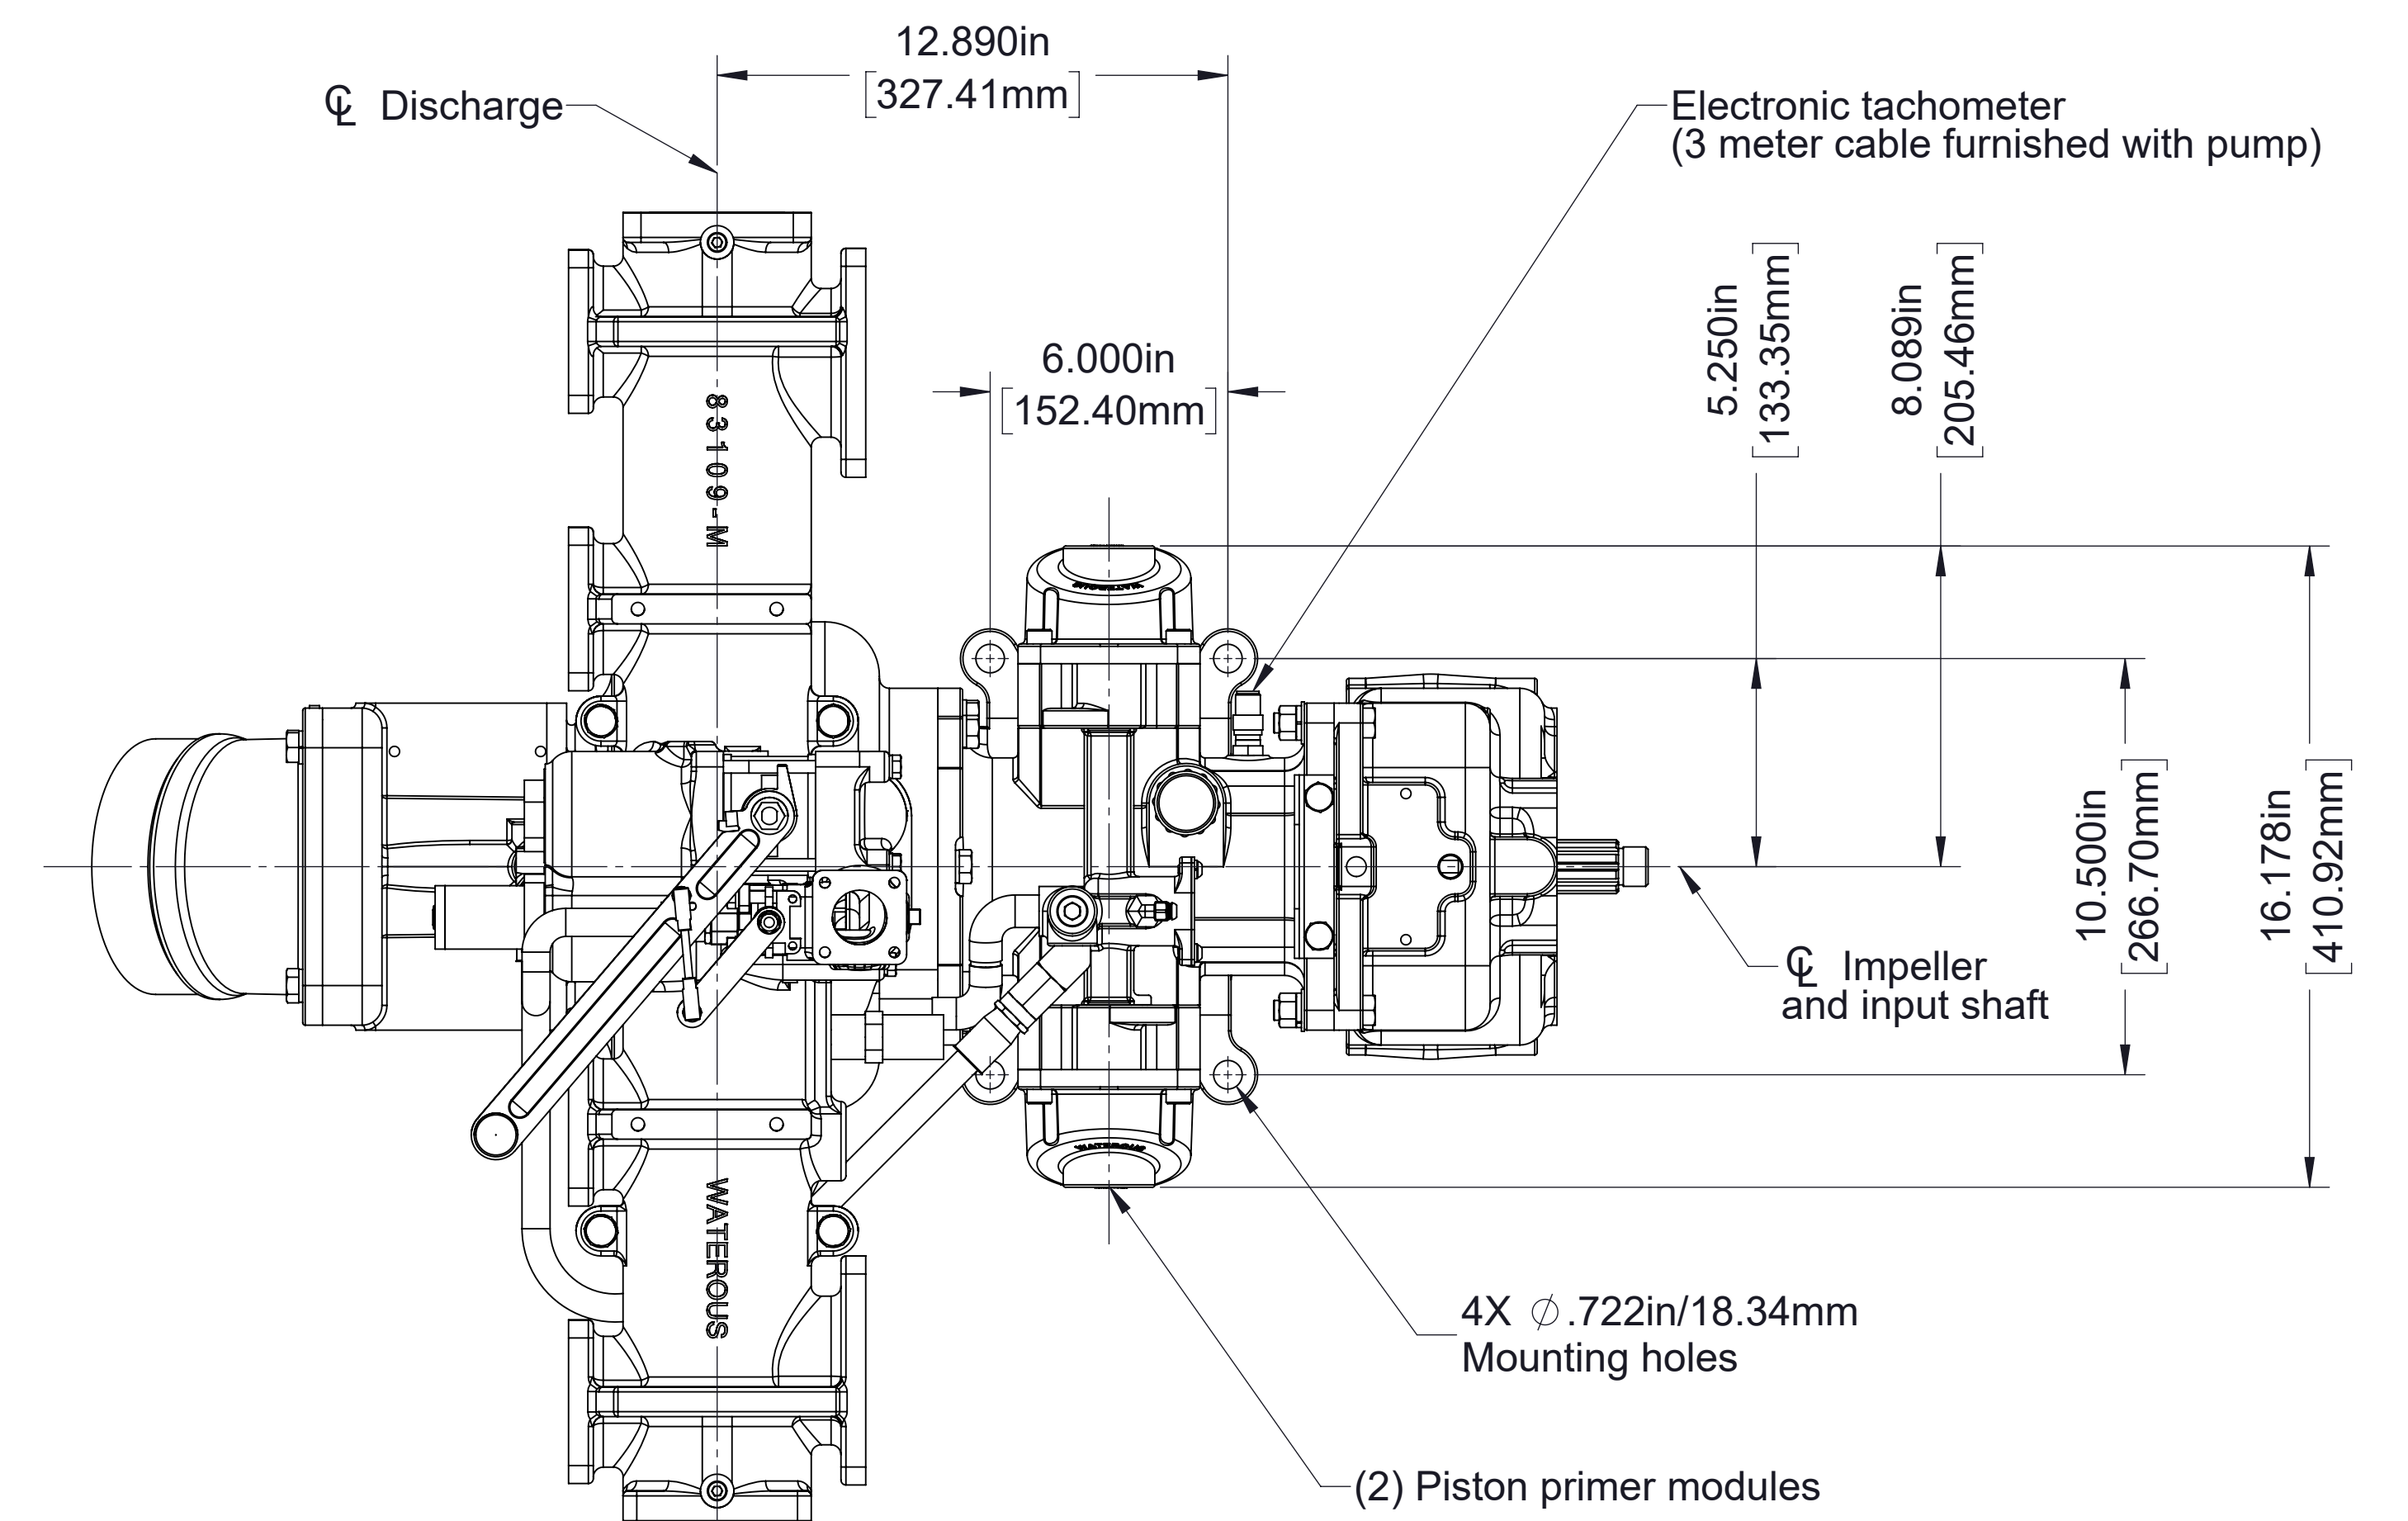


**HL400K Pump
Counter Clockwise Input Rotation**

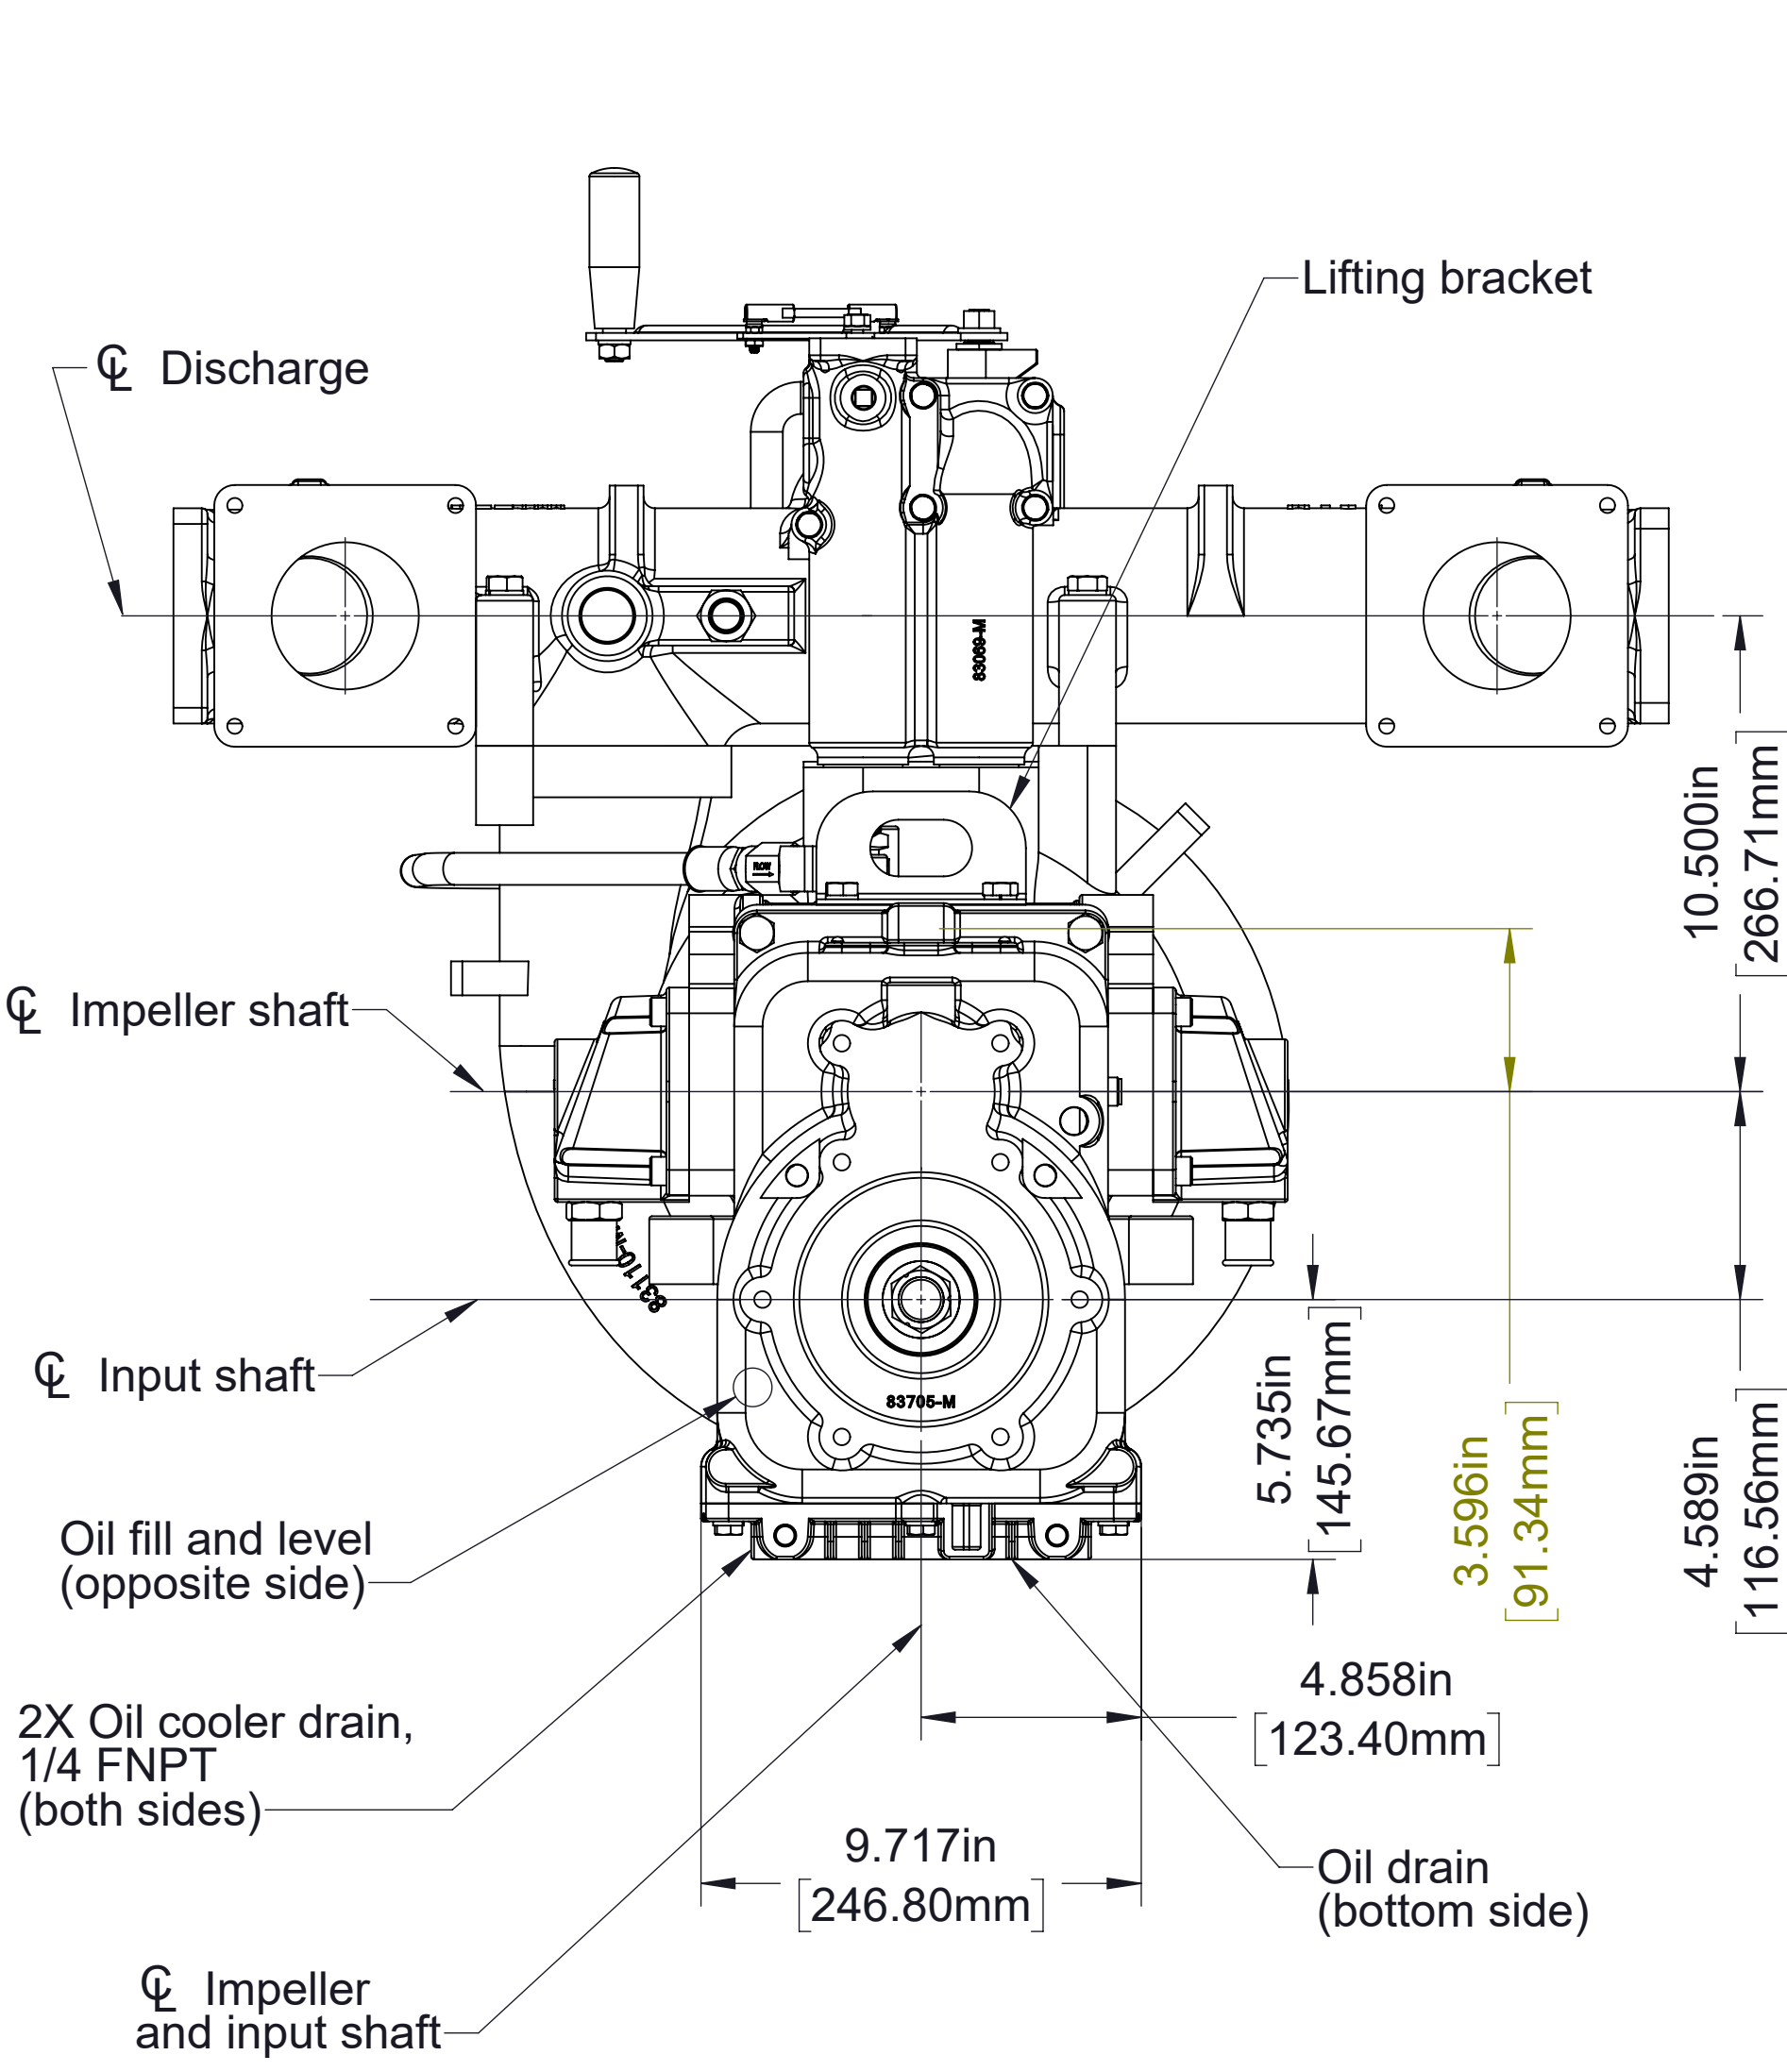

Vertical

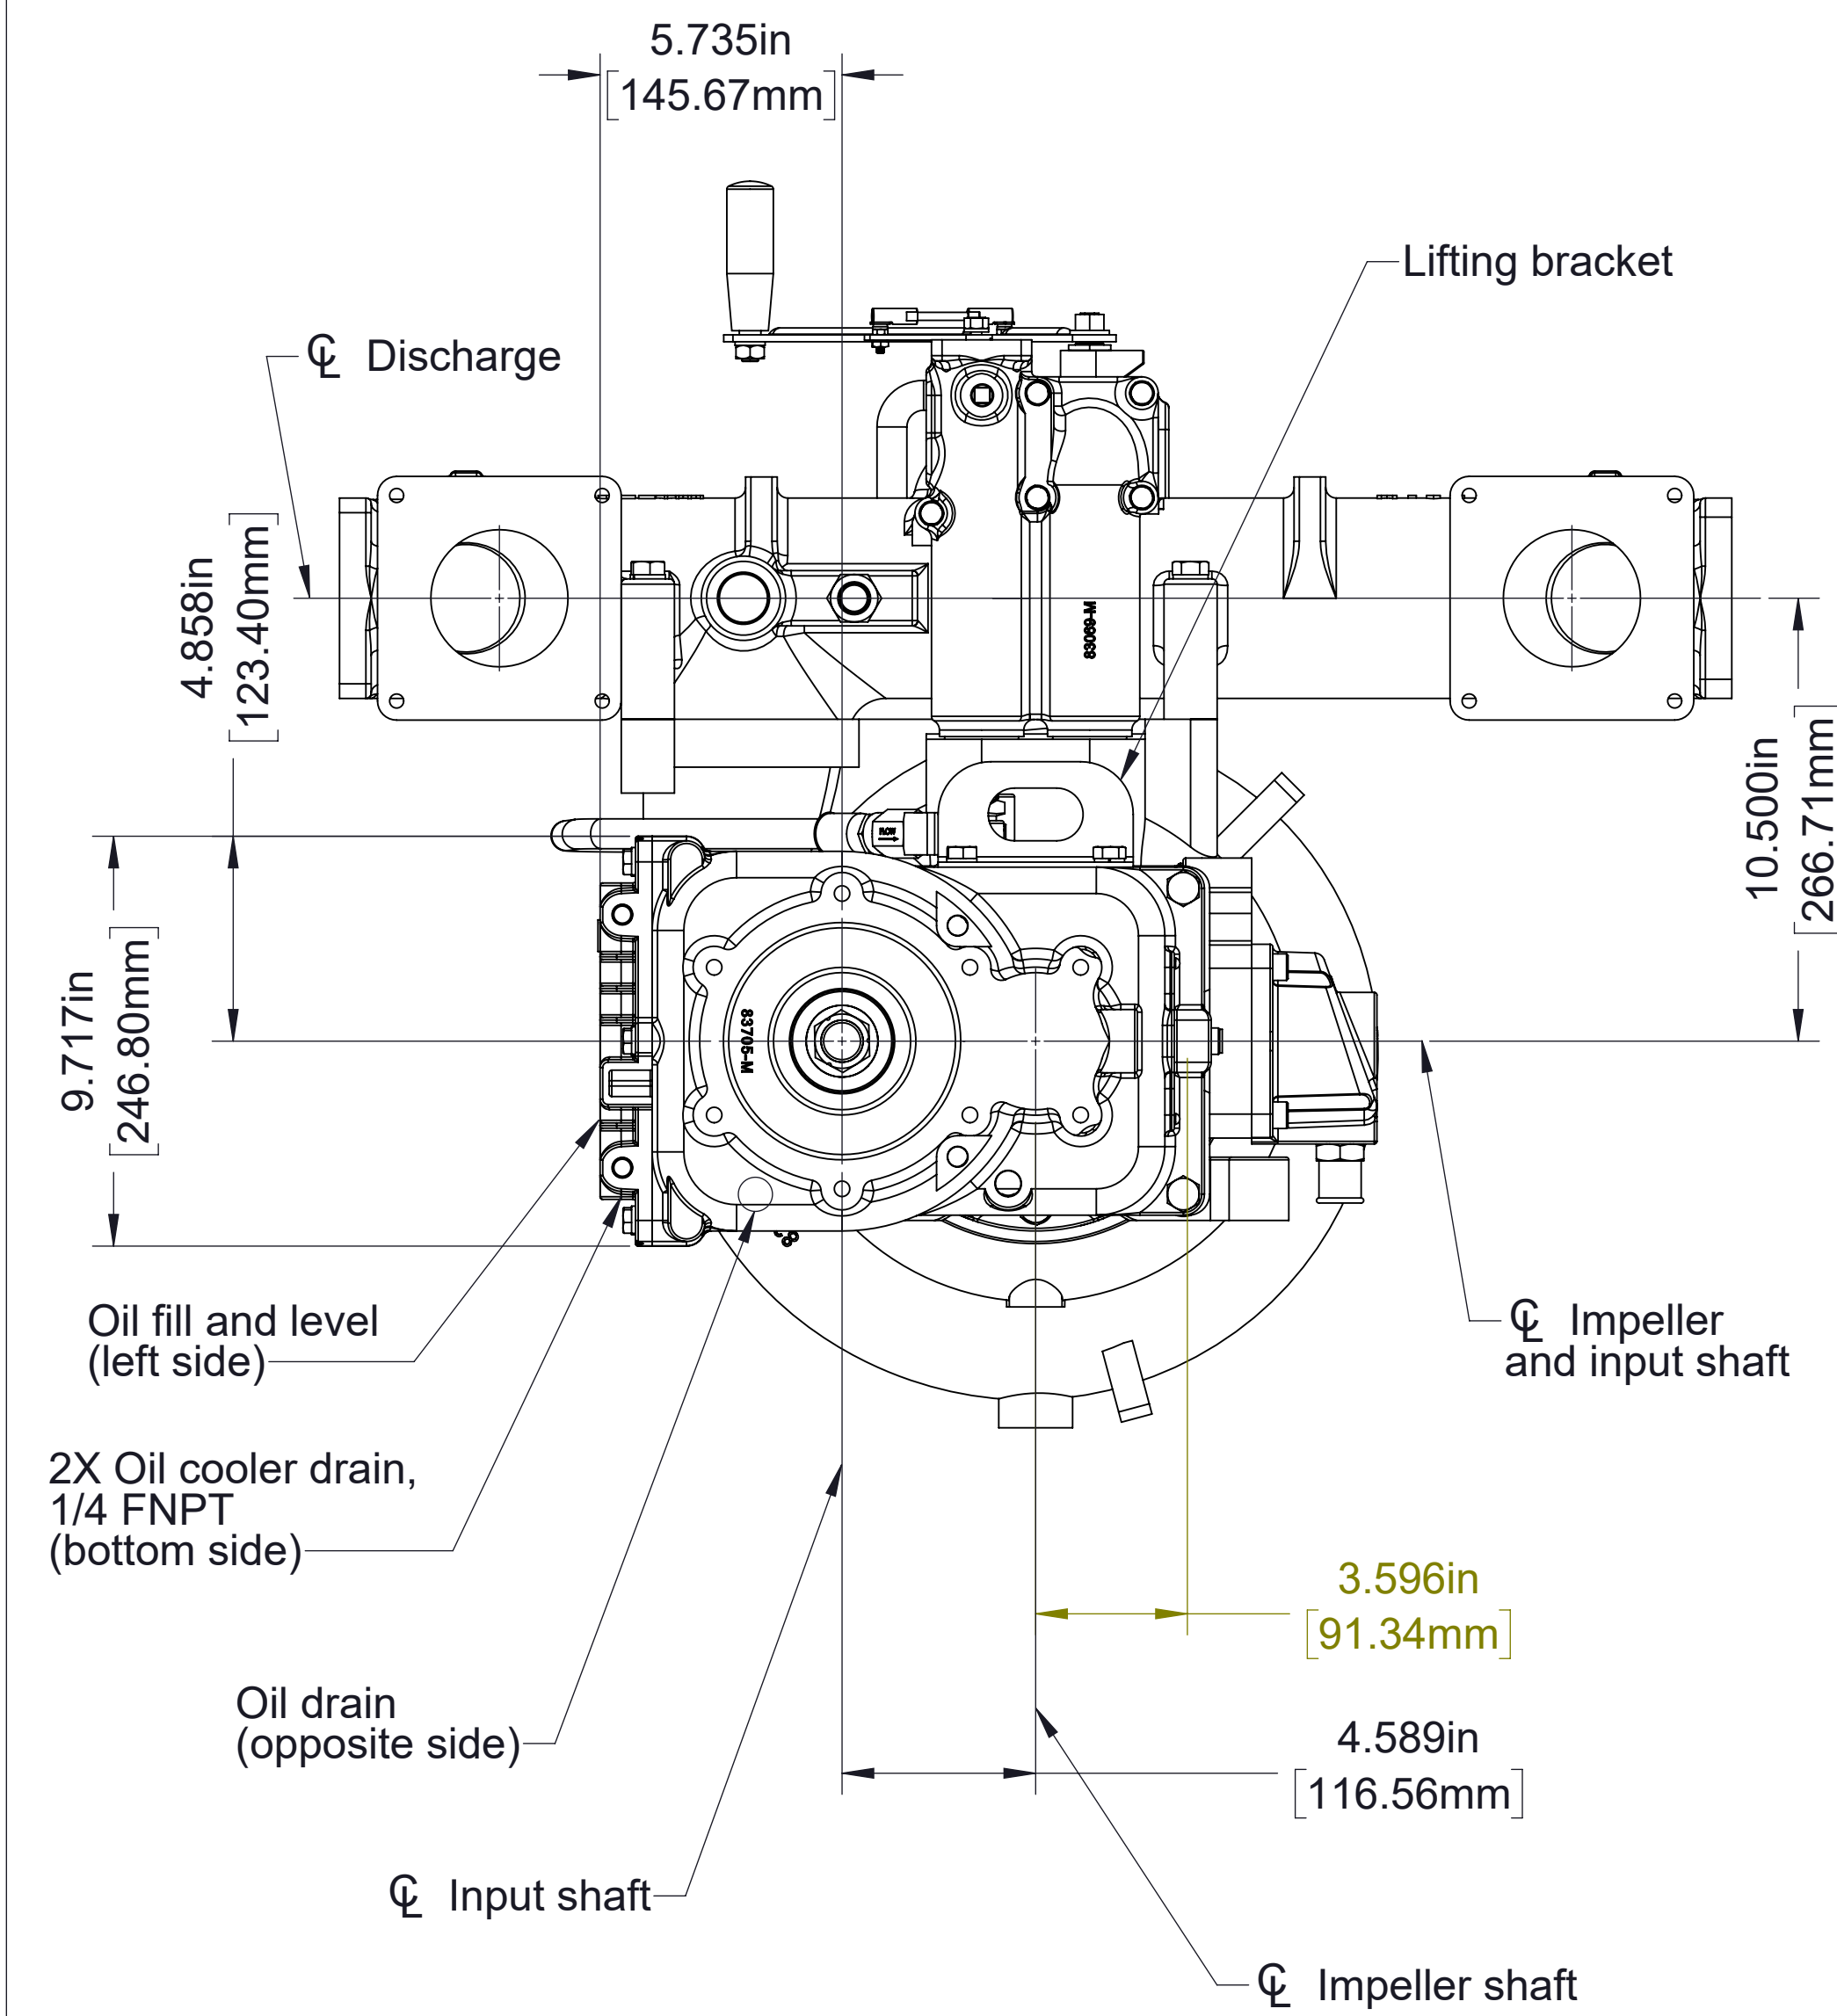





Left

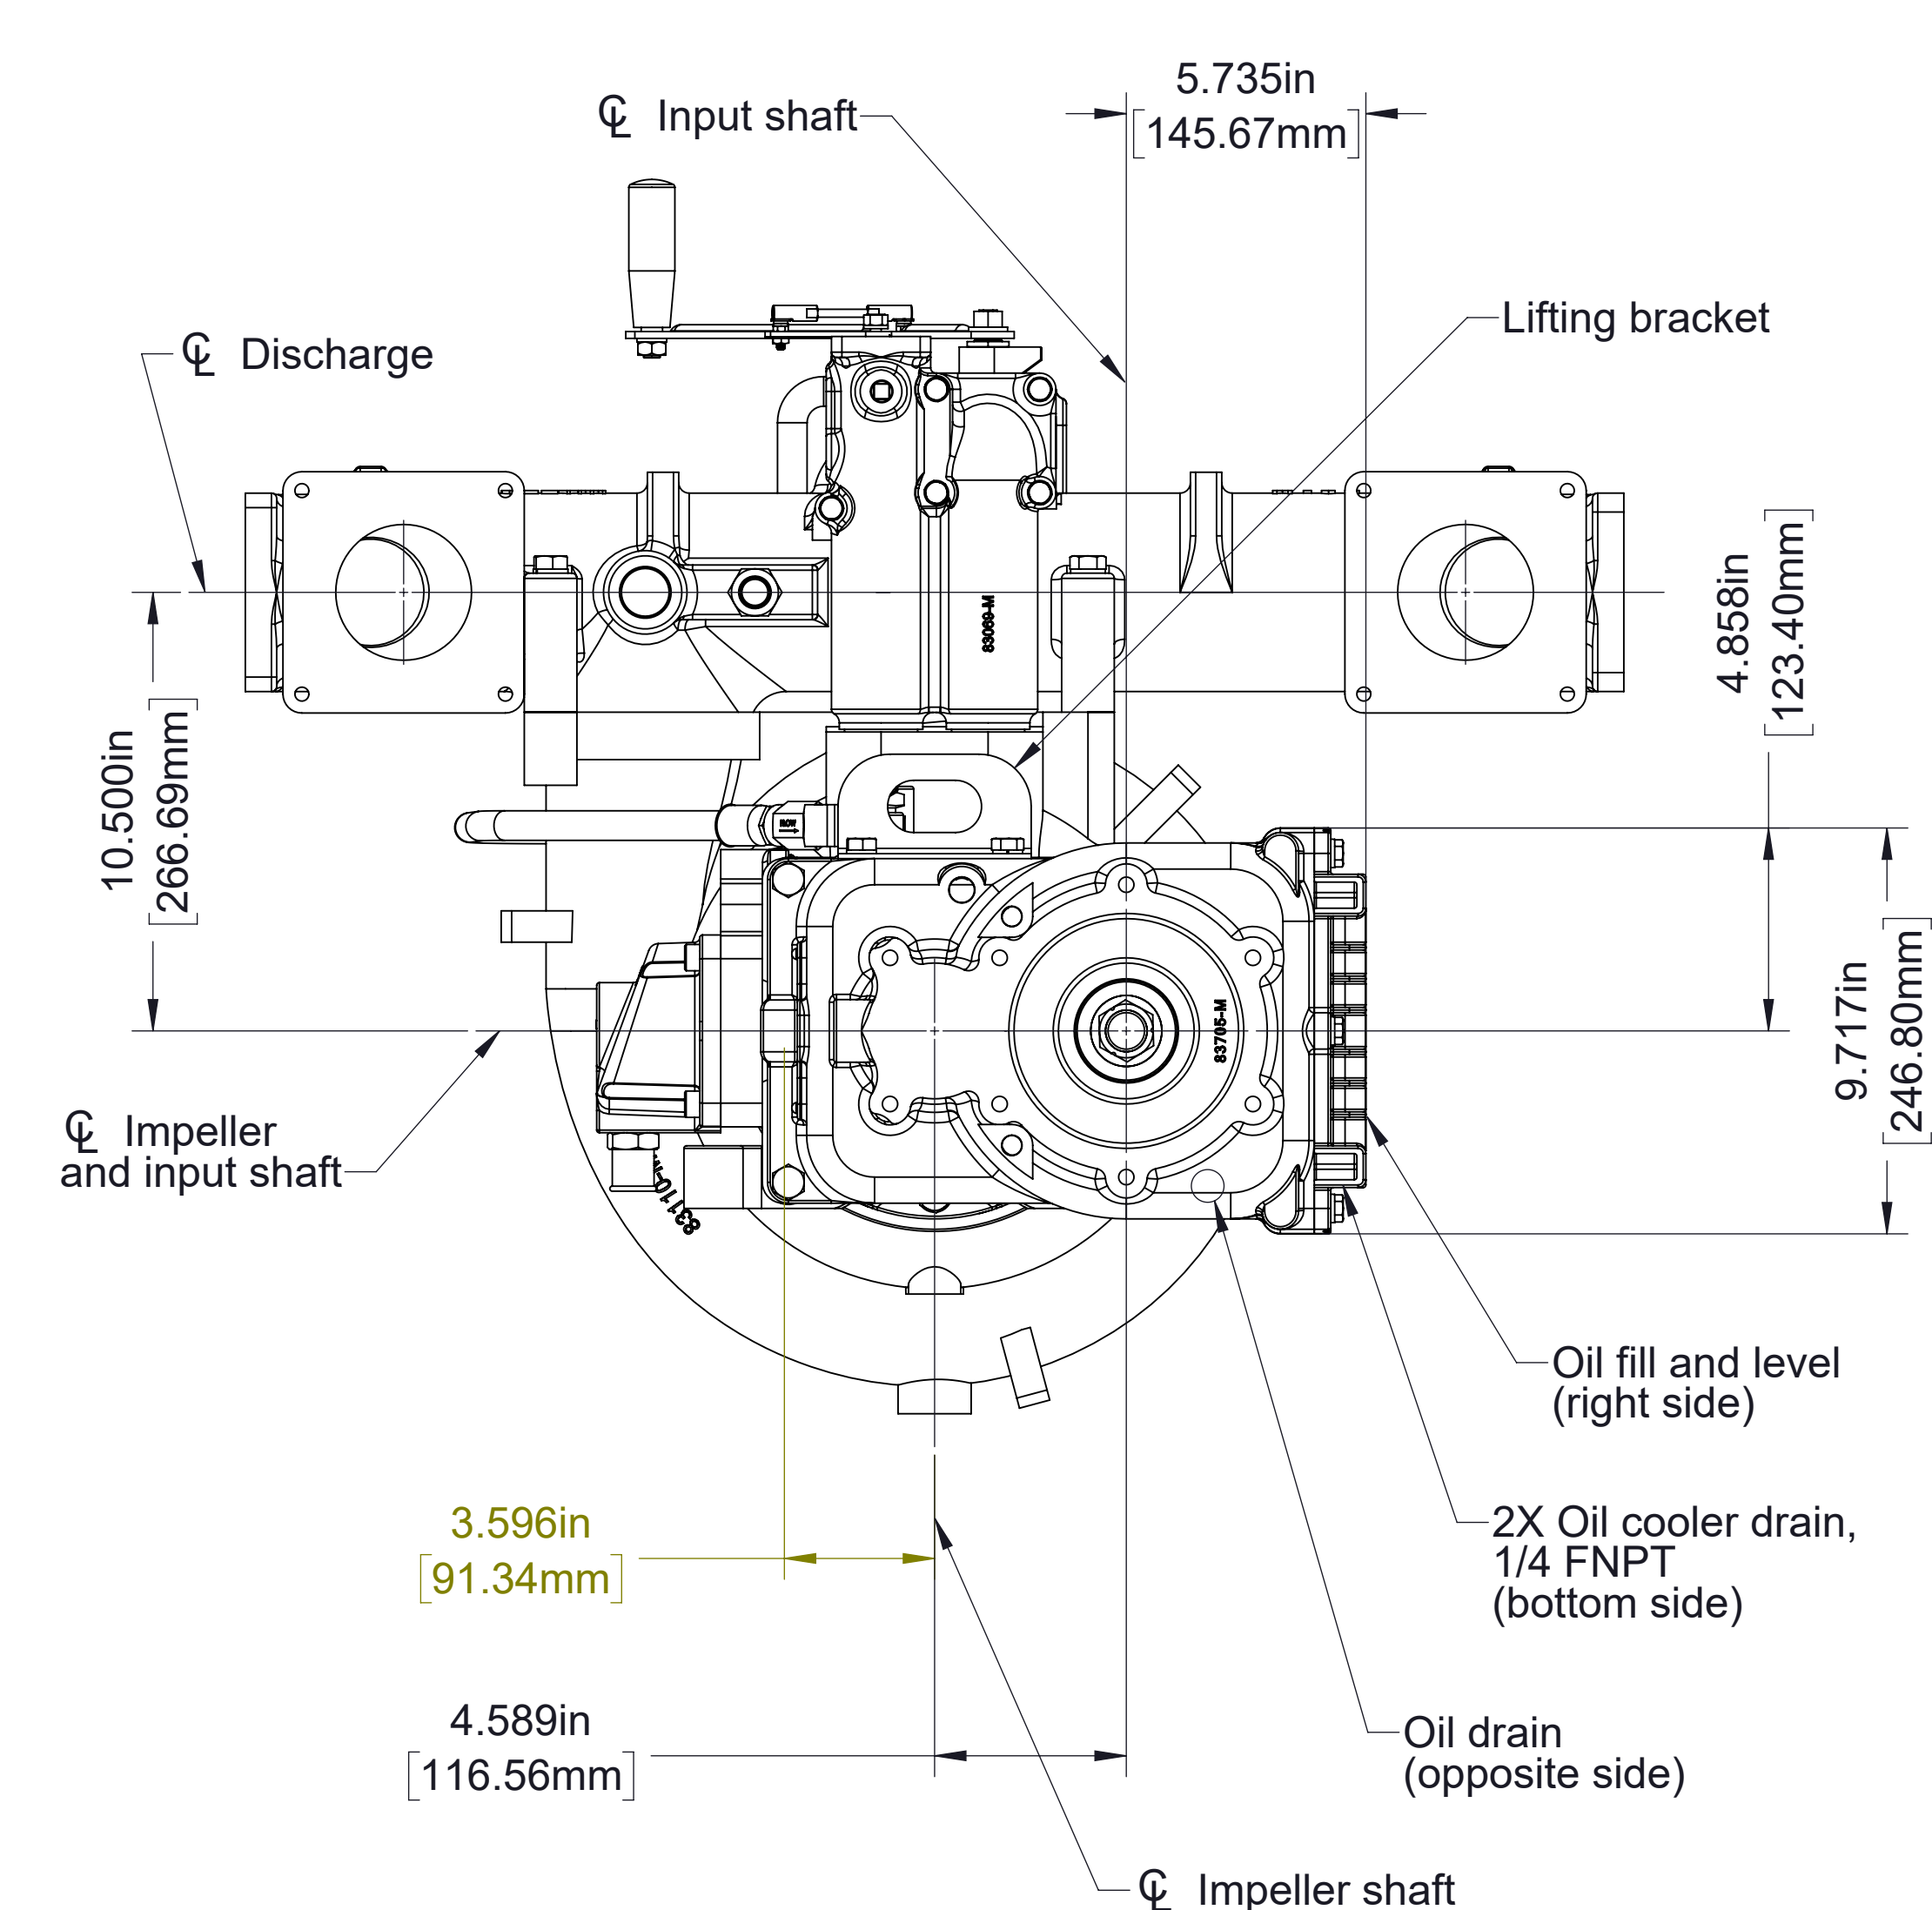

Right


Horizontal

Transmission Mounting Positions
(Defined as viewed from drive end of pump)

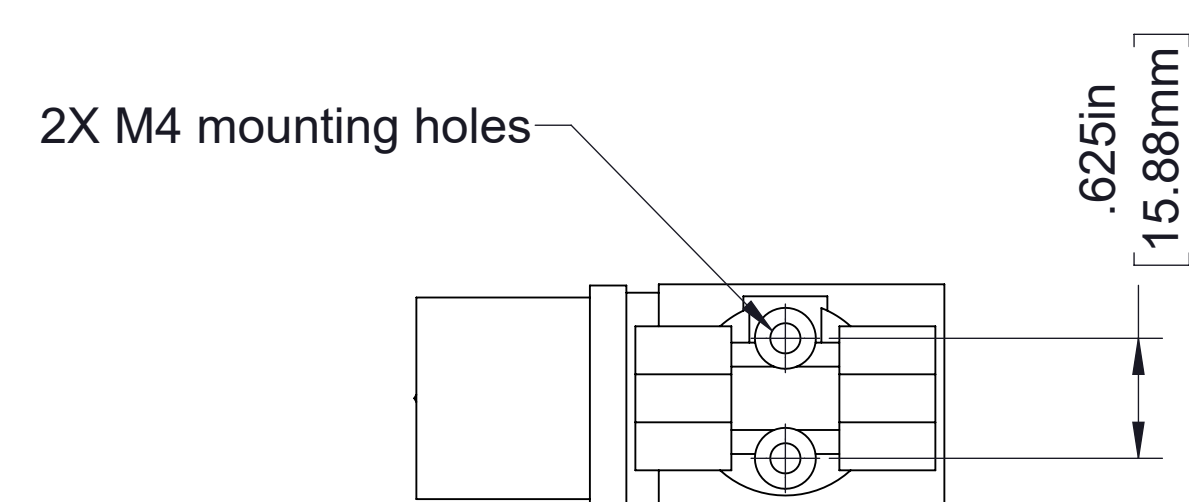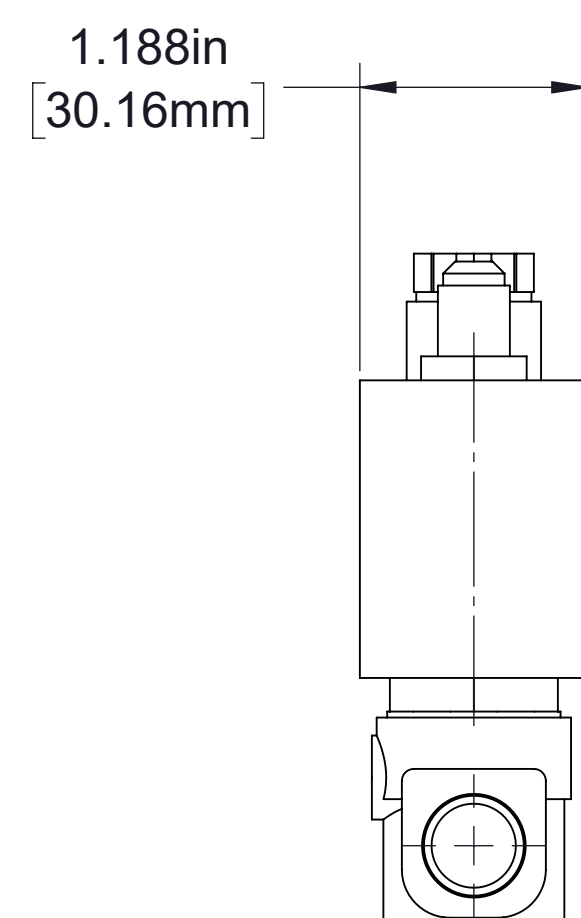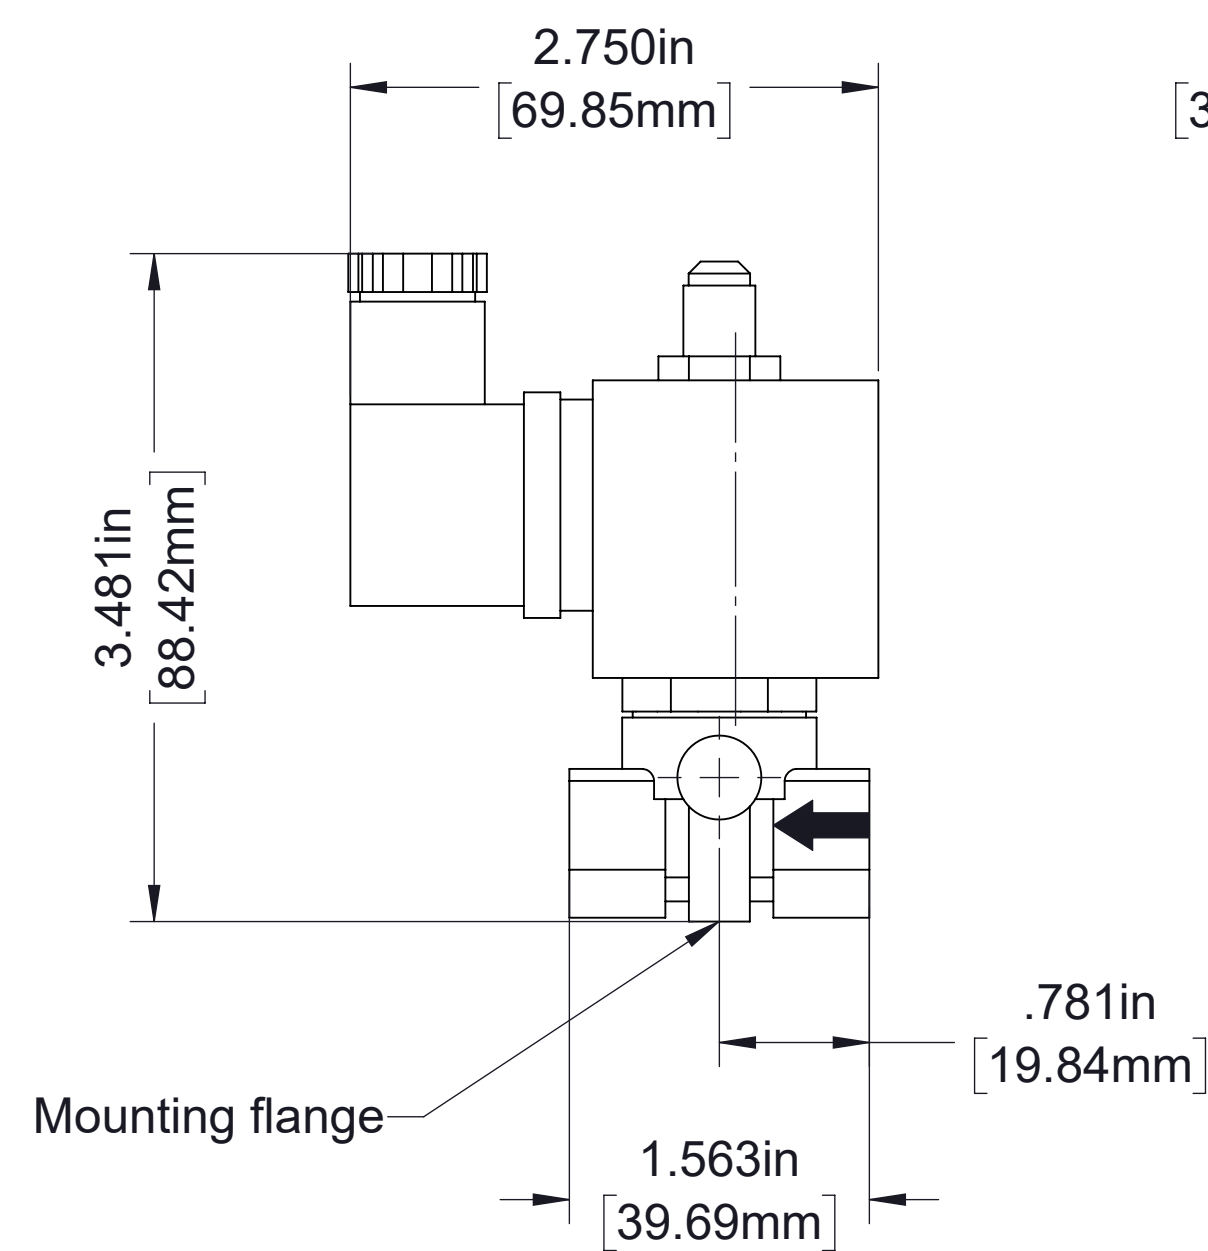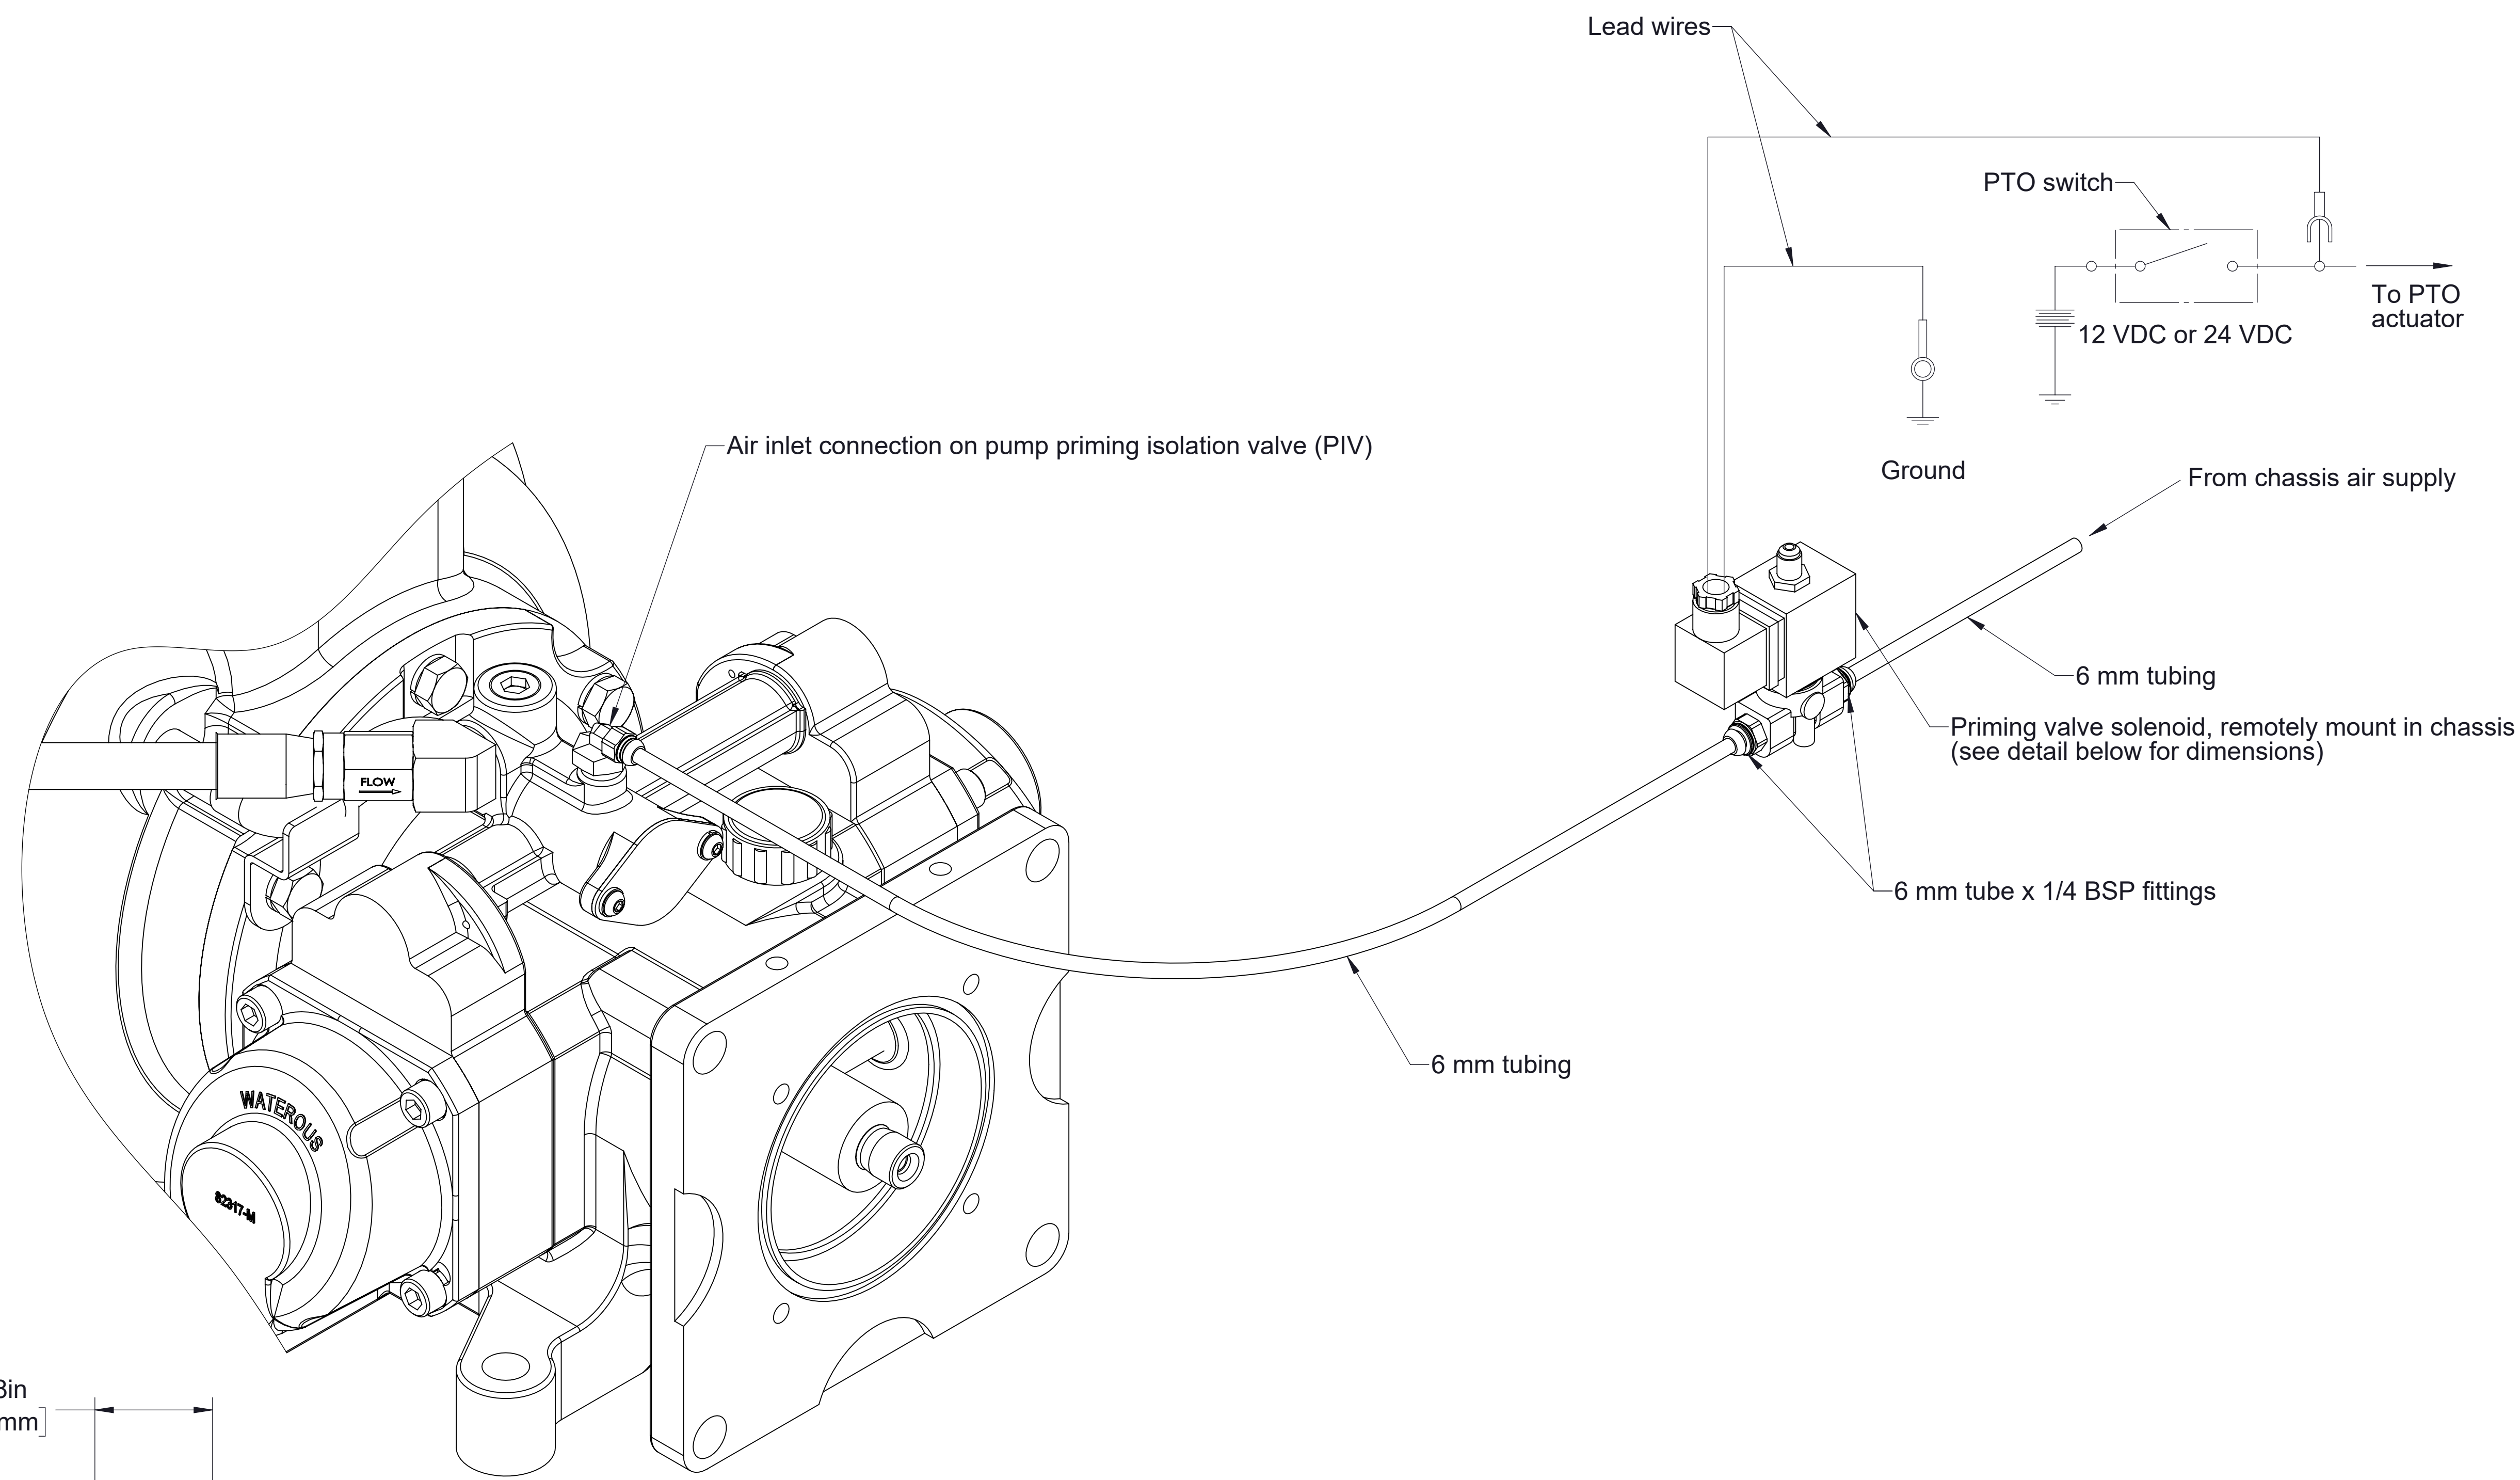


Components Required		
Quantity	Item	Furnished By:
1	Solenoid	Waterous
2	6 mm tube x 1/4 BSP fitting	Waterous
3 meters	6 mm tubing	Waterous
All	Wiring (16 or 18 AWG)	Truck builder
1	PTO switch	Truck builder
All	Connectors to chassis air supply	Truck builder



Priming Isolation Valve (PIV) Solenoid Valve

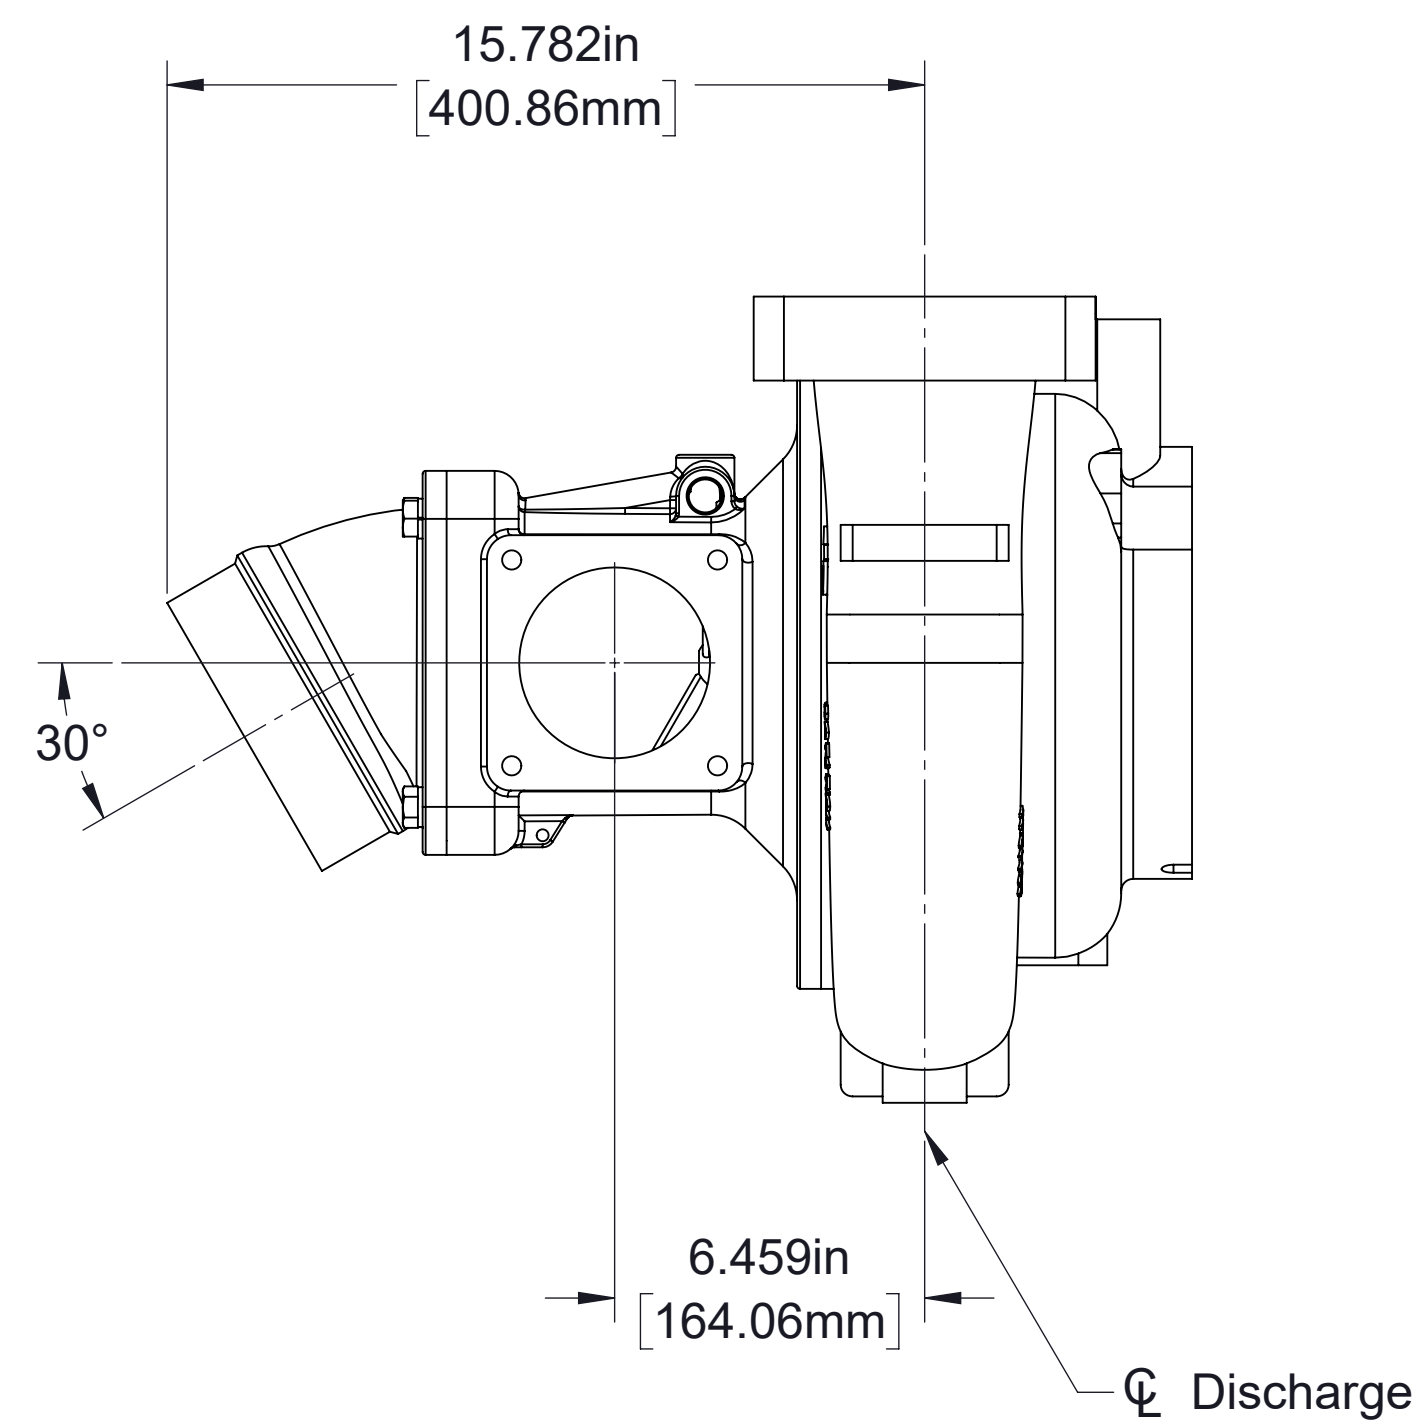



6 in BSP Thread

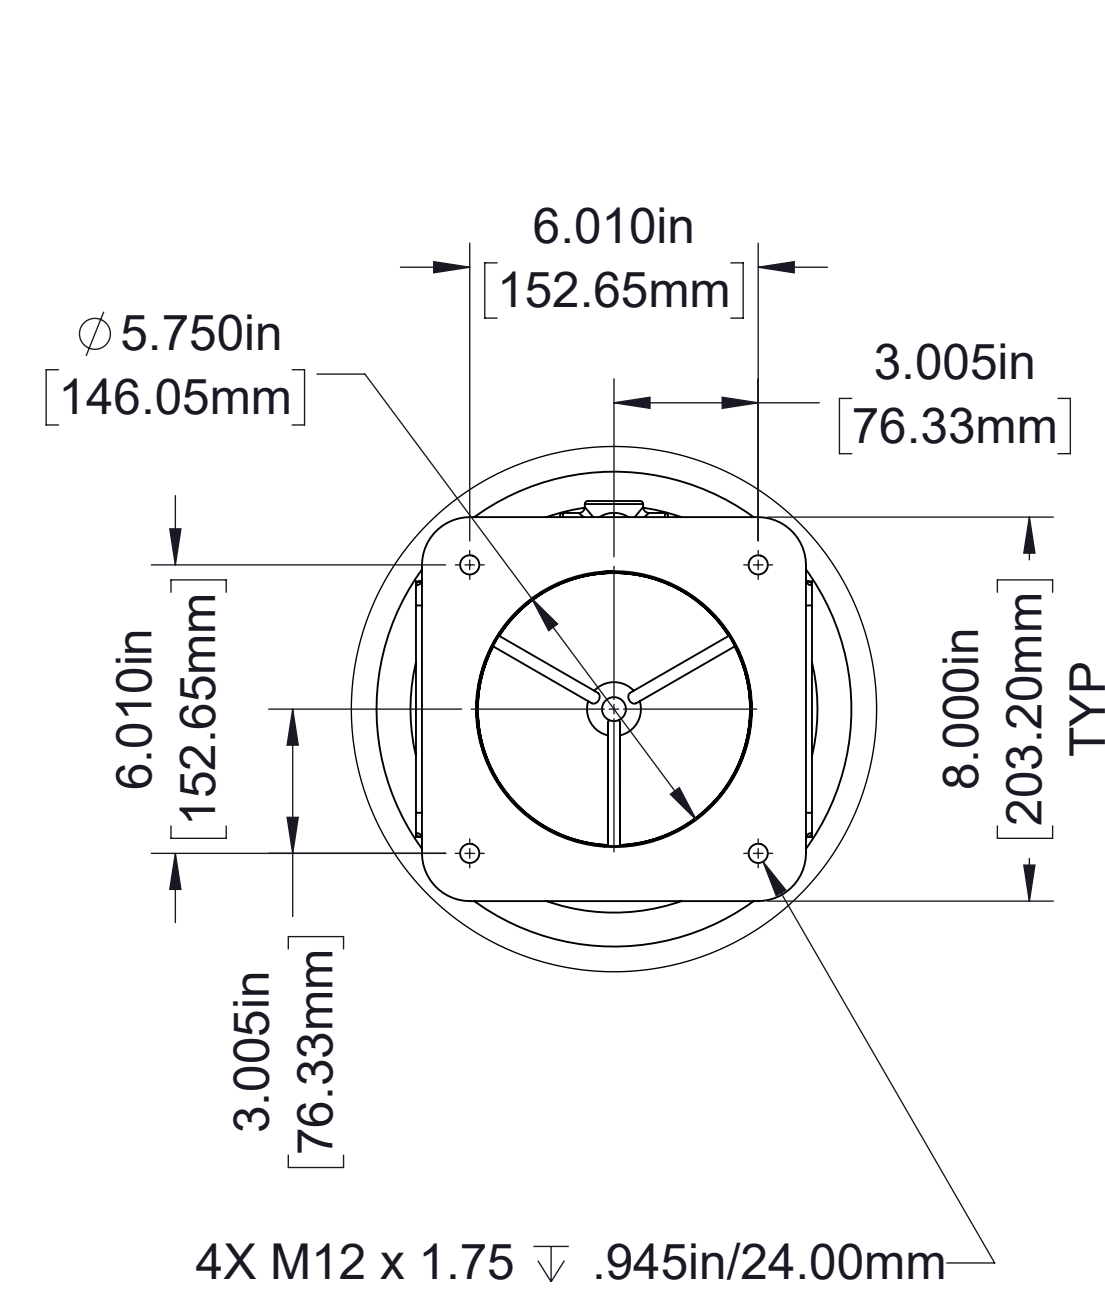

4-Bolt Flange

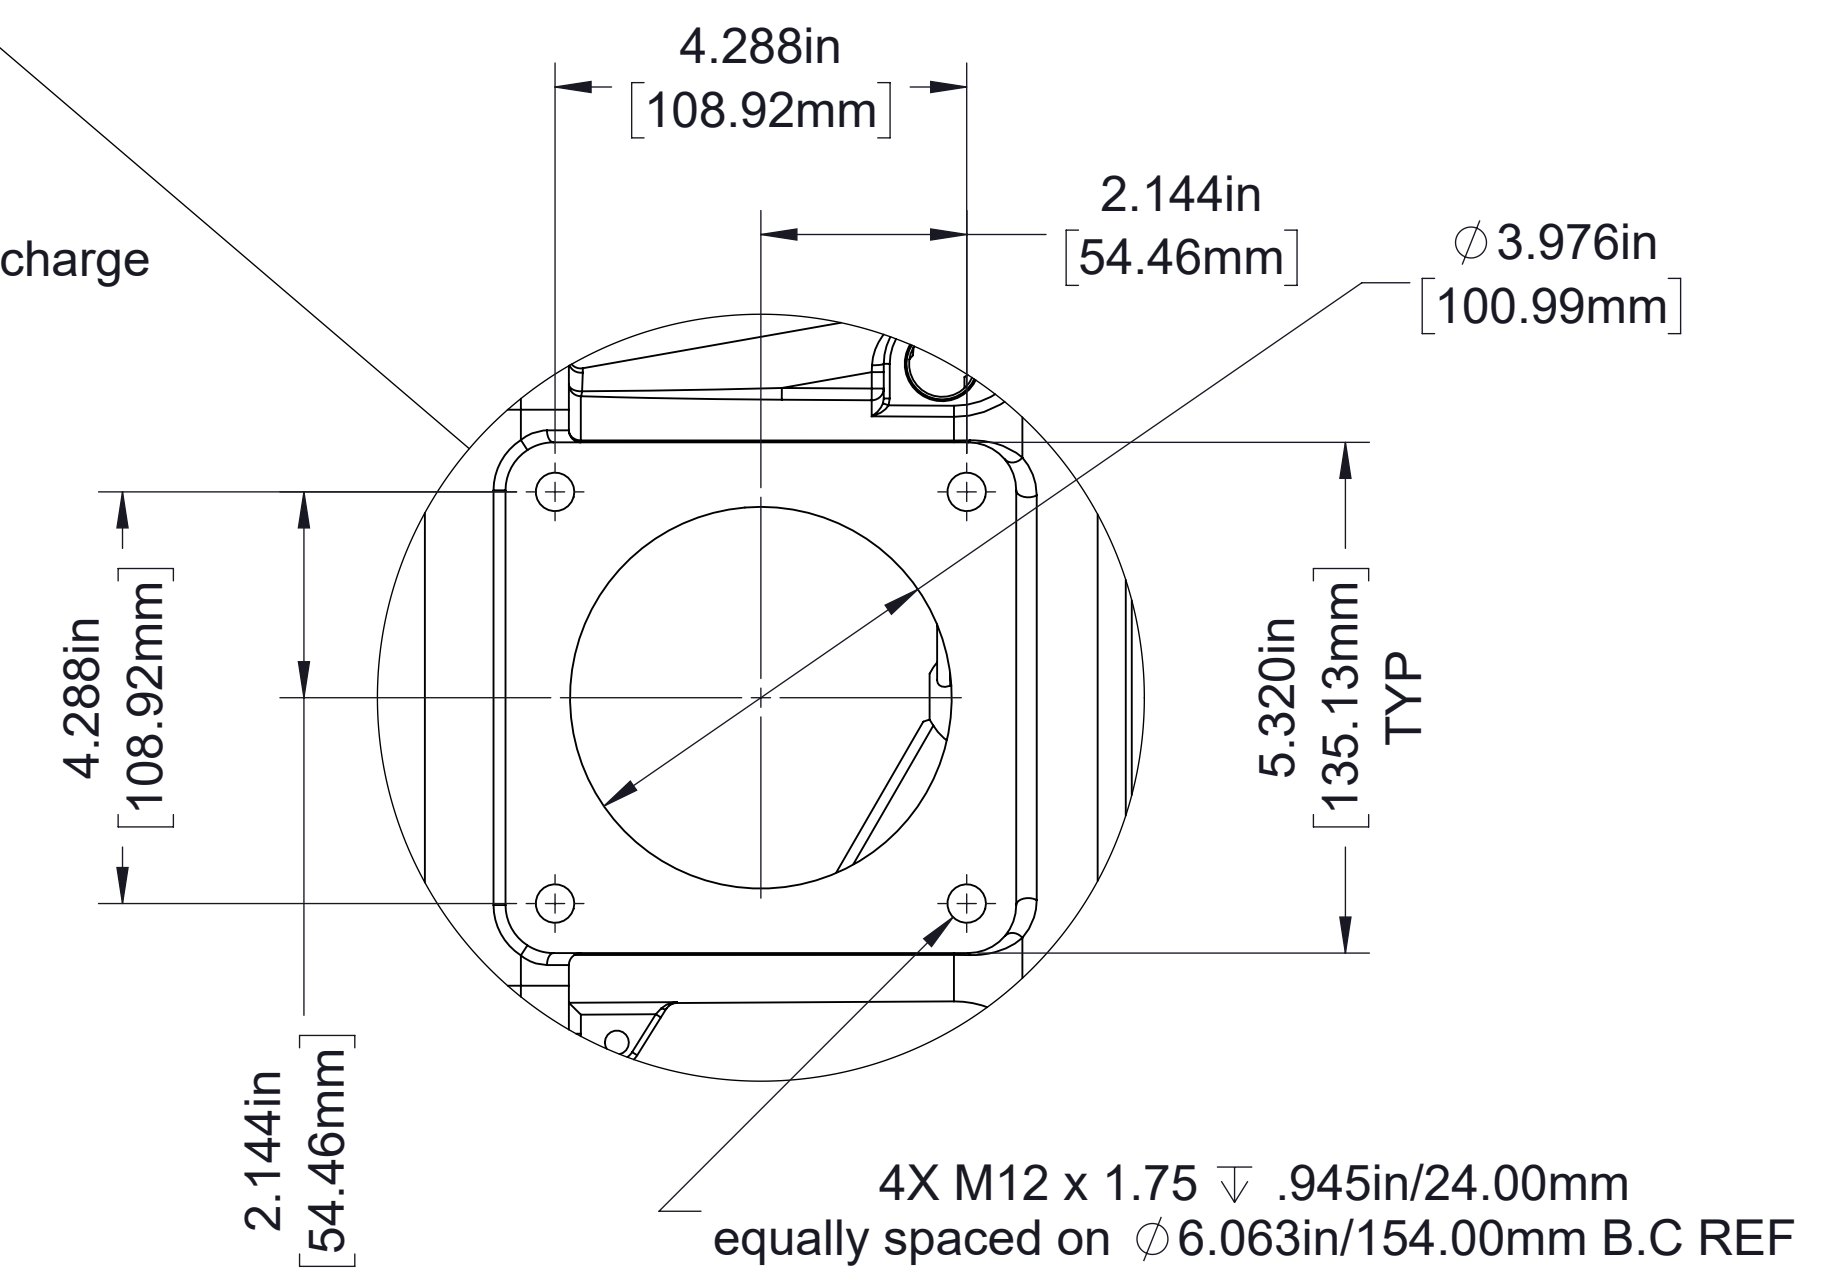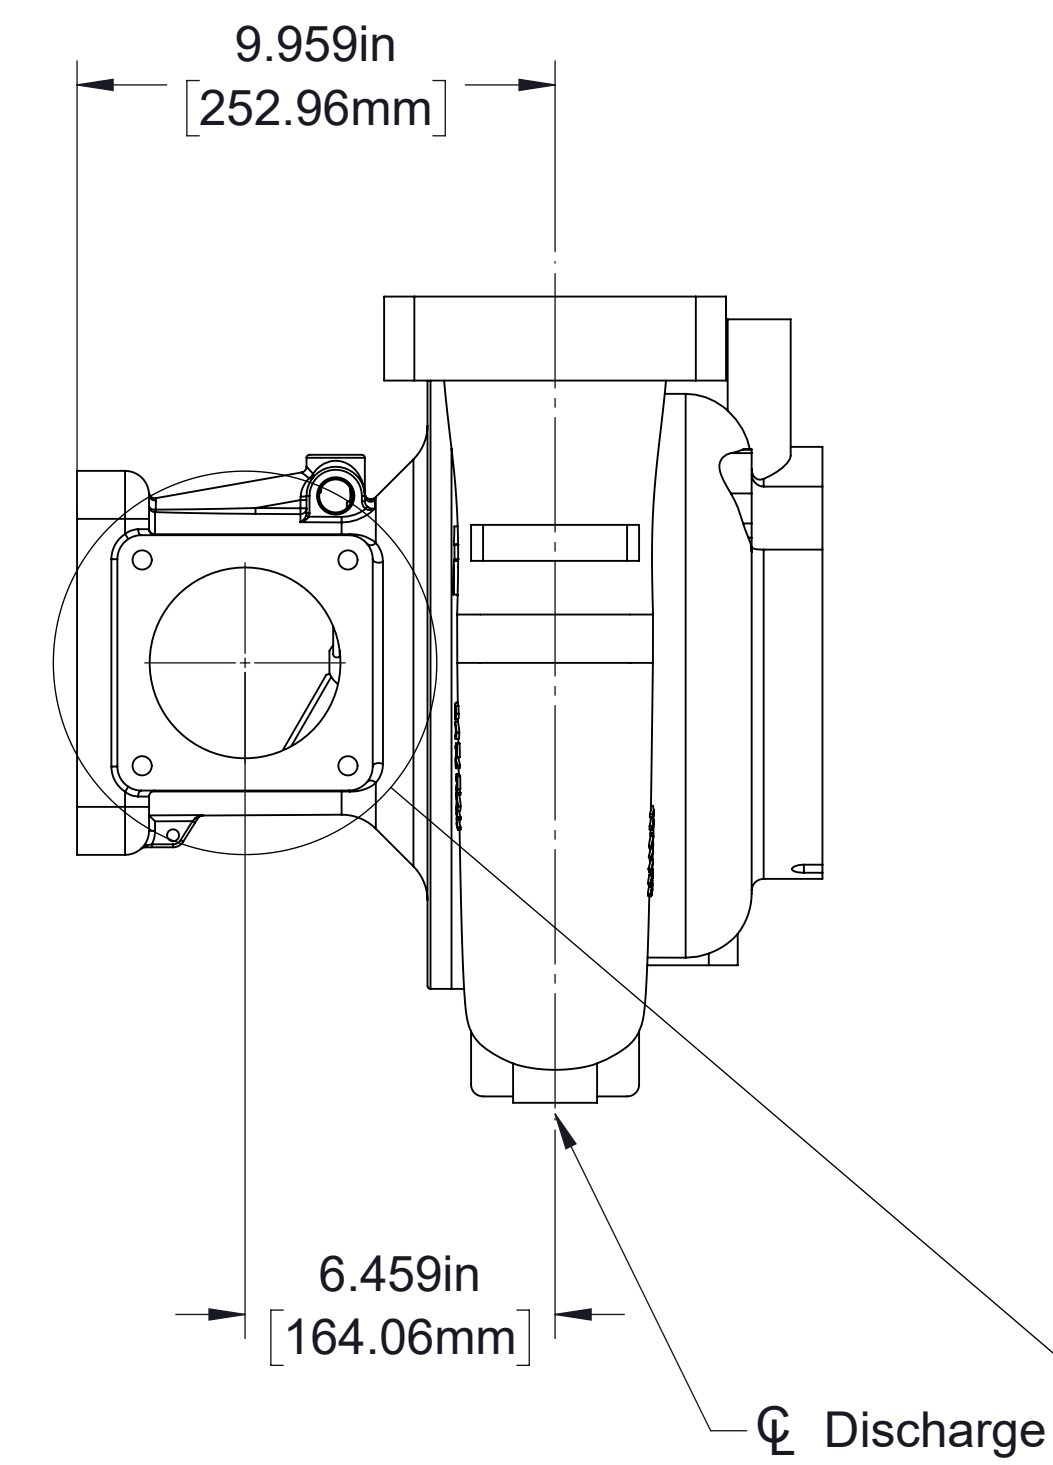


Detail A
101 mm 4-Bolt
See page 12 for auxiliary fittings
which may be mounted on this pad

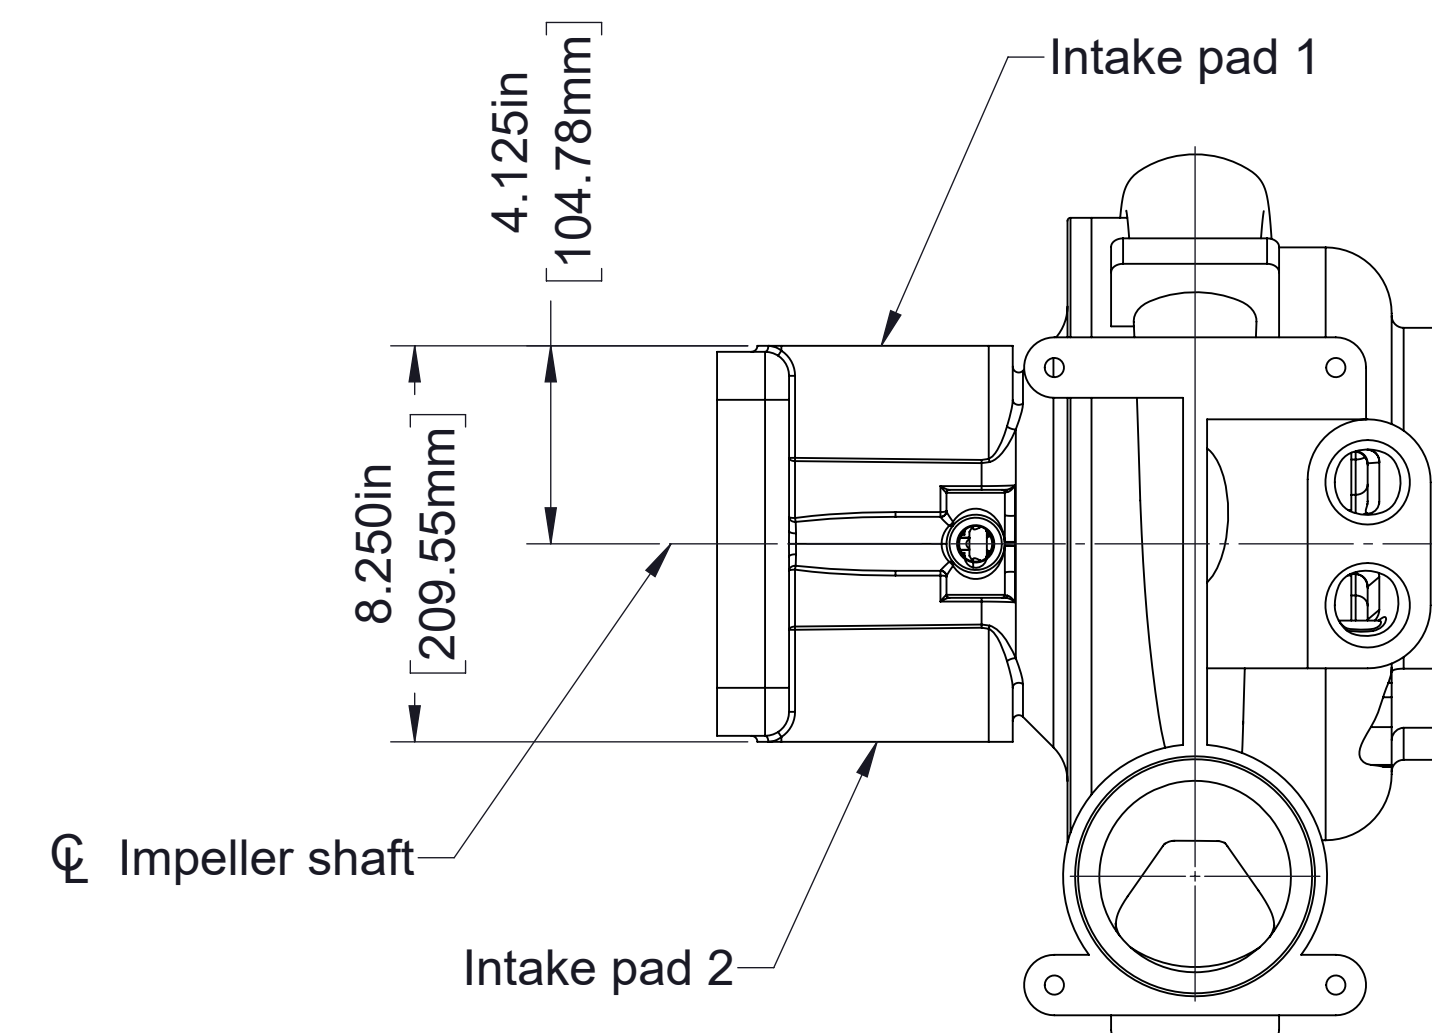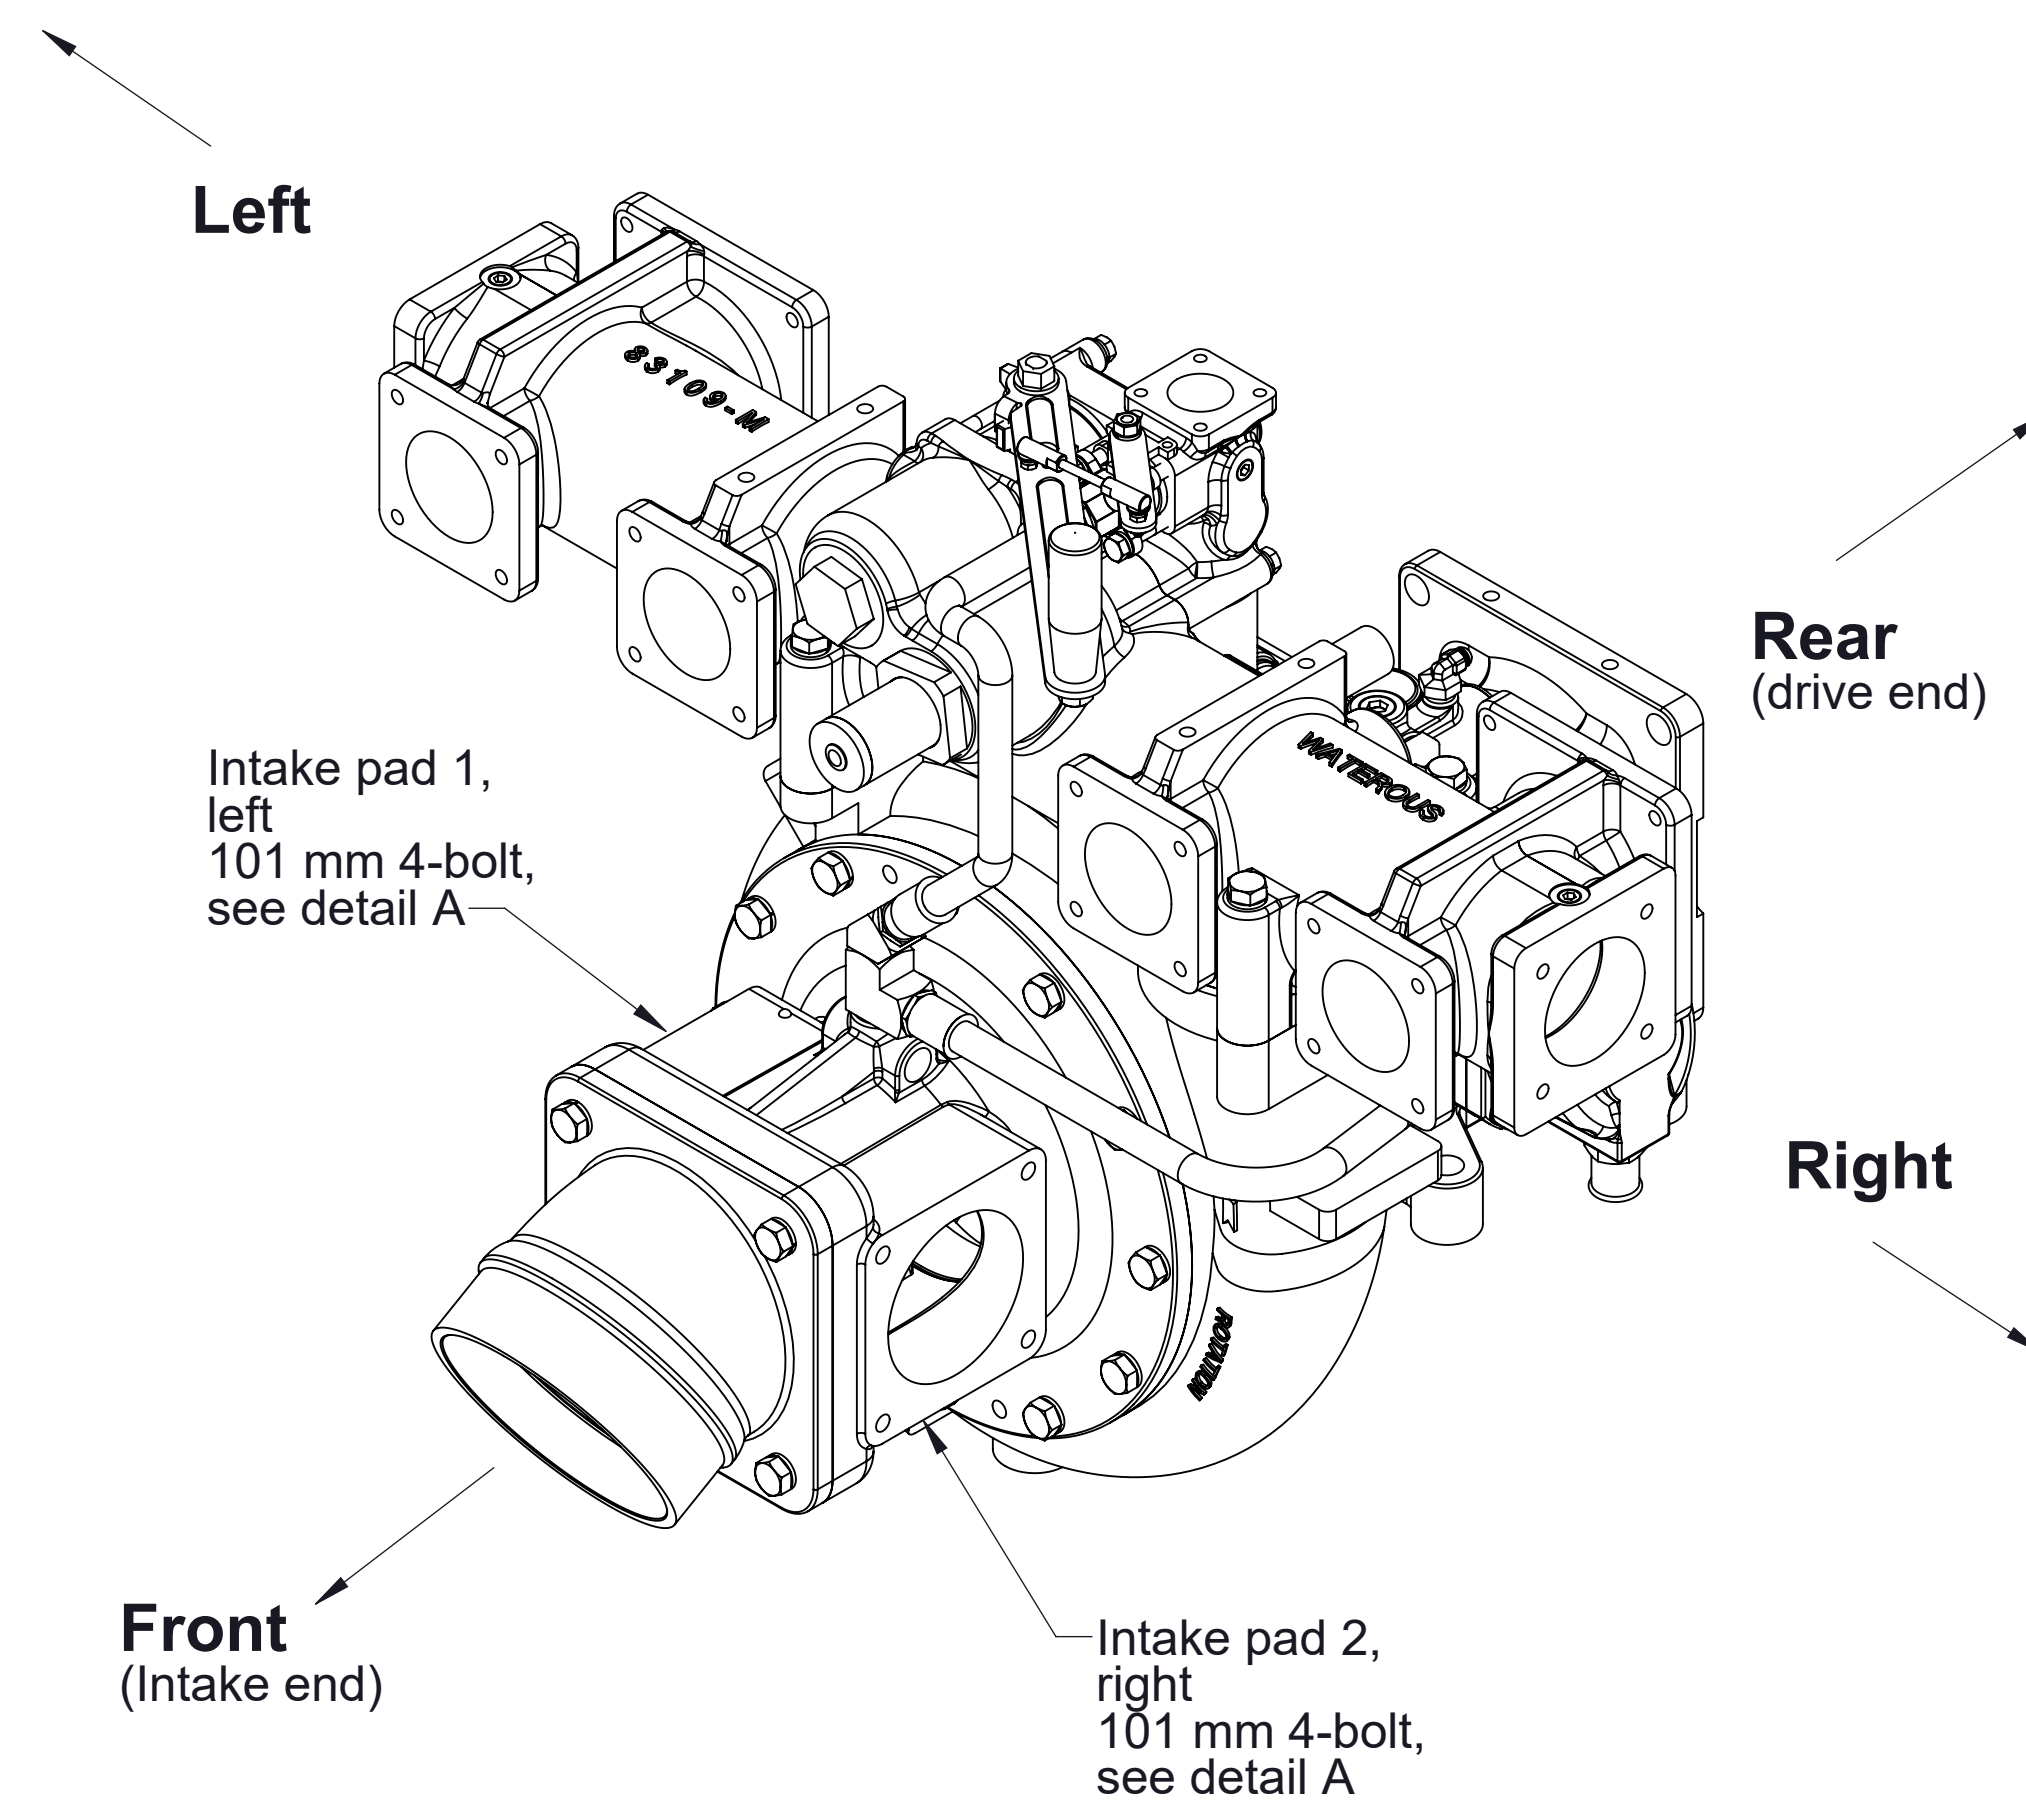


(Top view of Pump and Intake)
Dimensions typical for all HL series
intake connections
See detail A for dimensions of pad 1 and 2

Available Intake Connections



Standard length

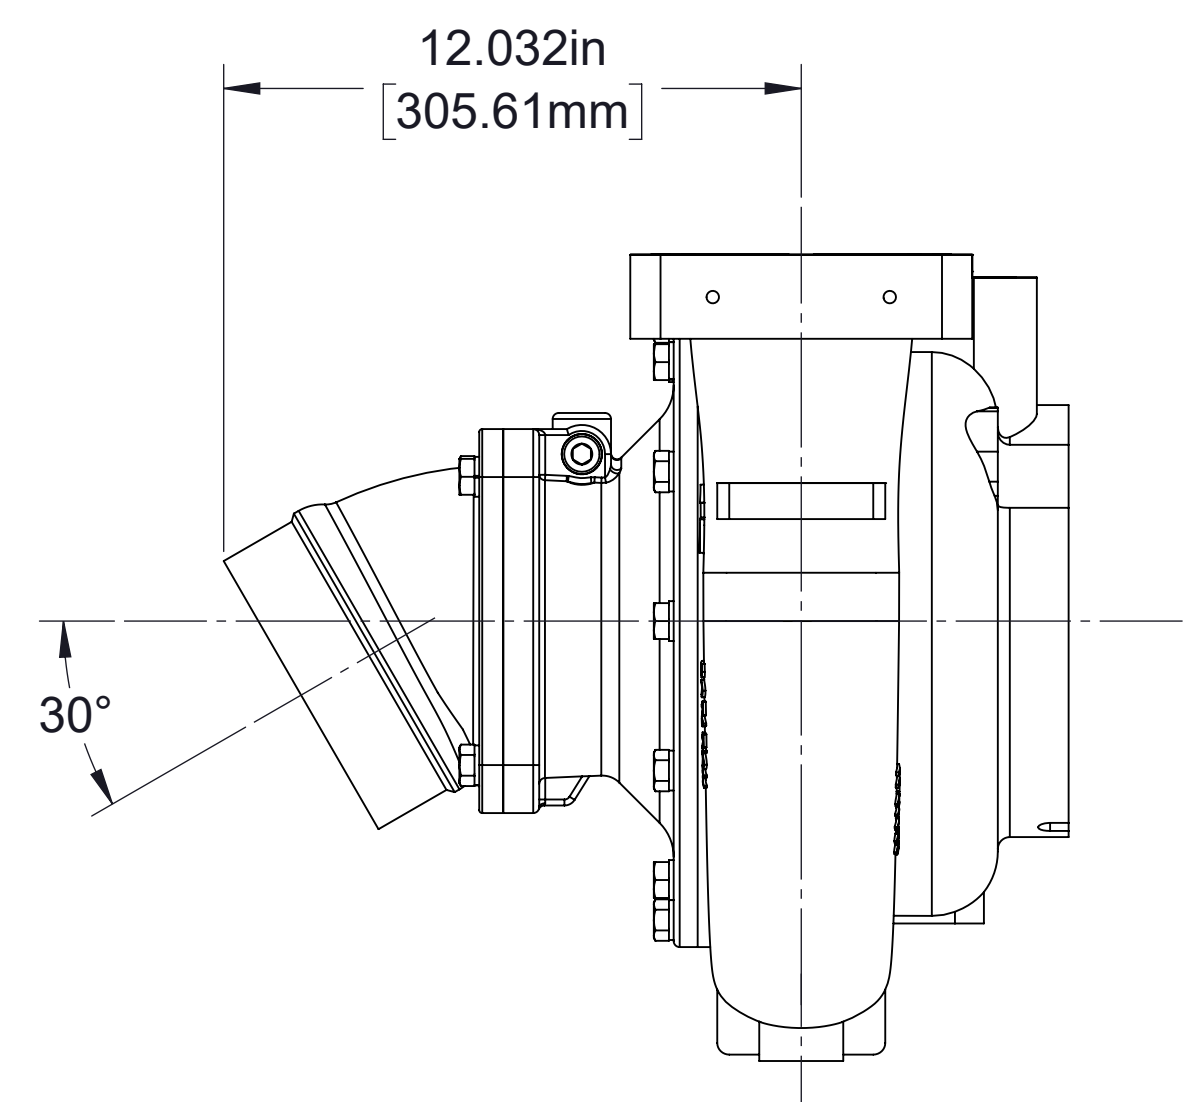

6 in BSP Thread

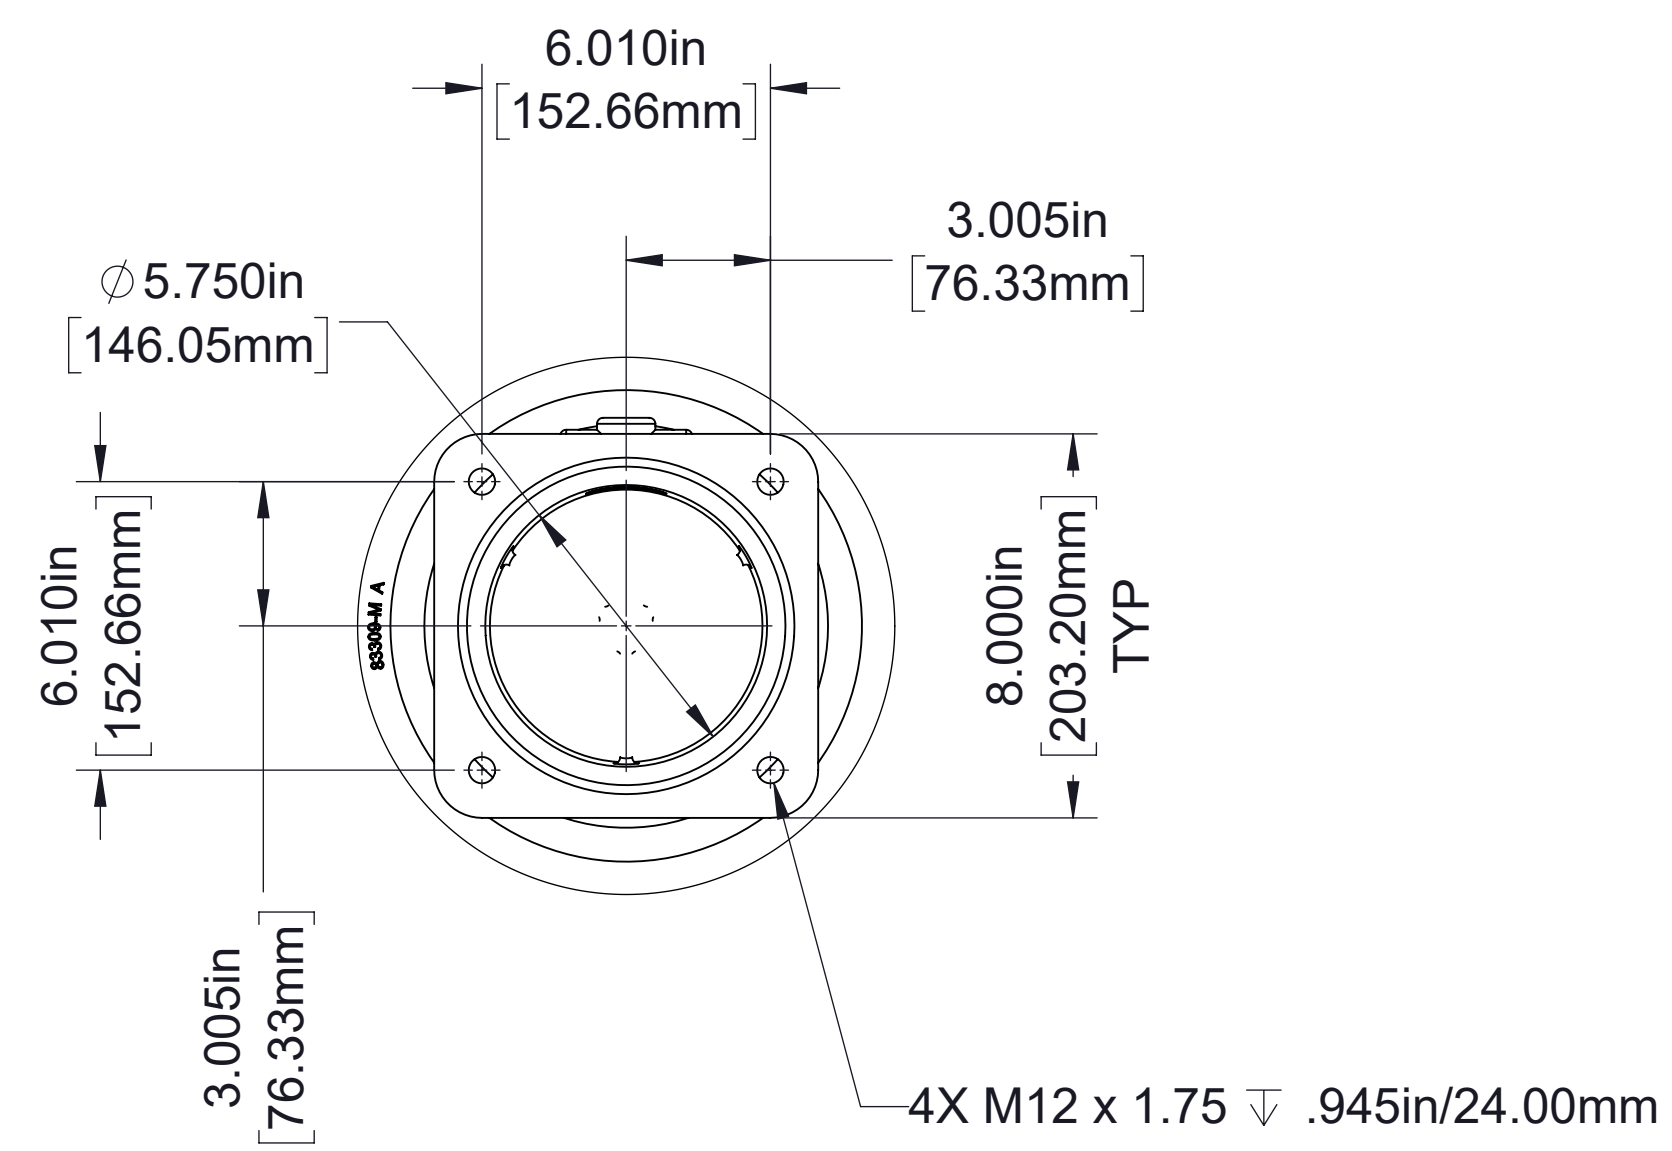


4-Bolt Flange

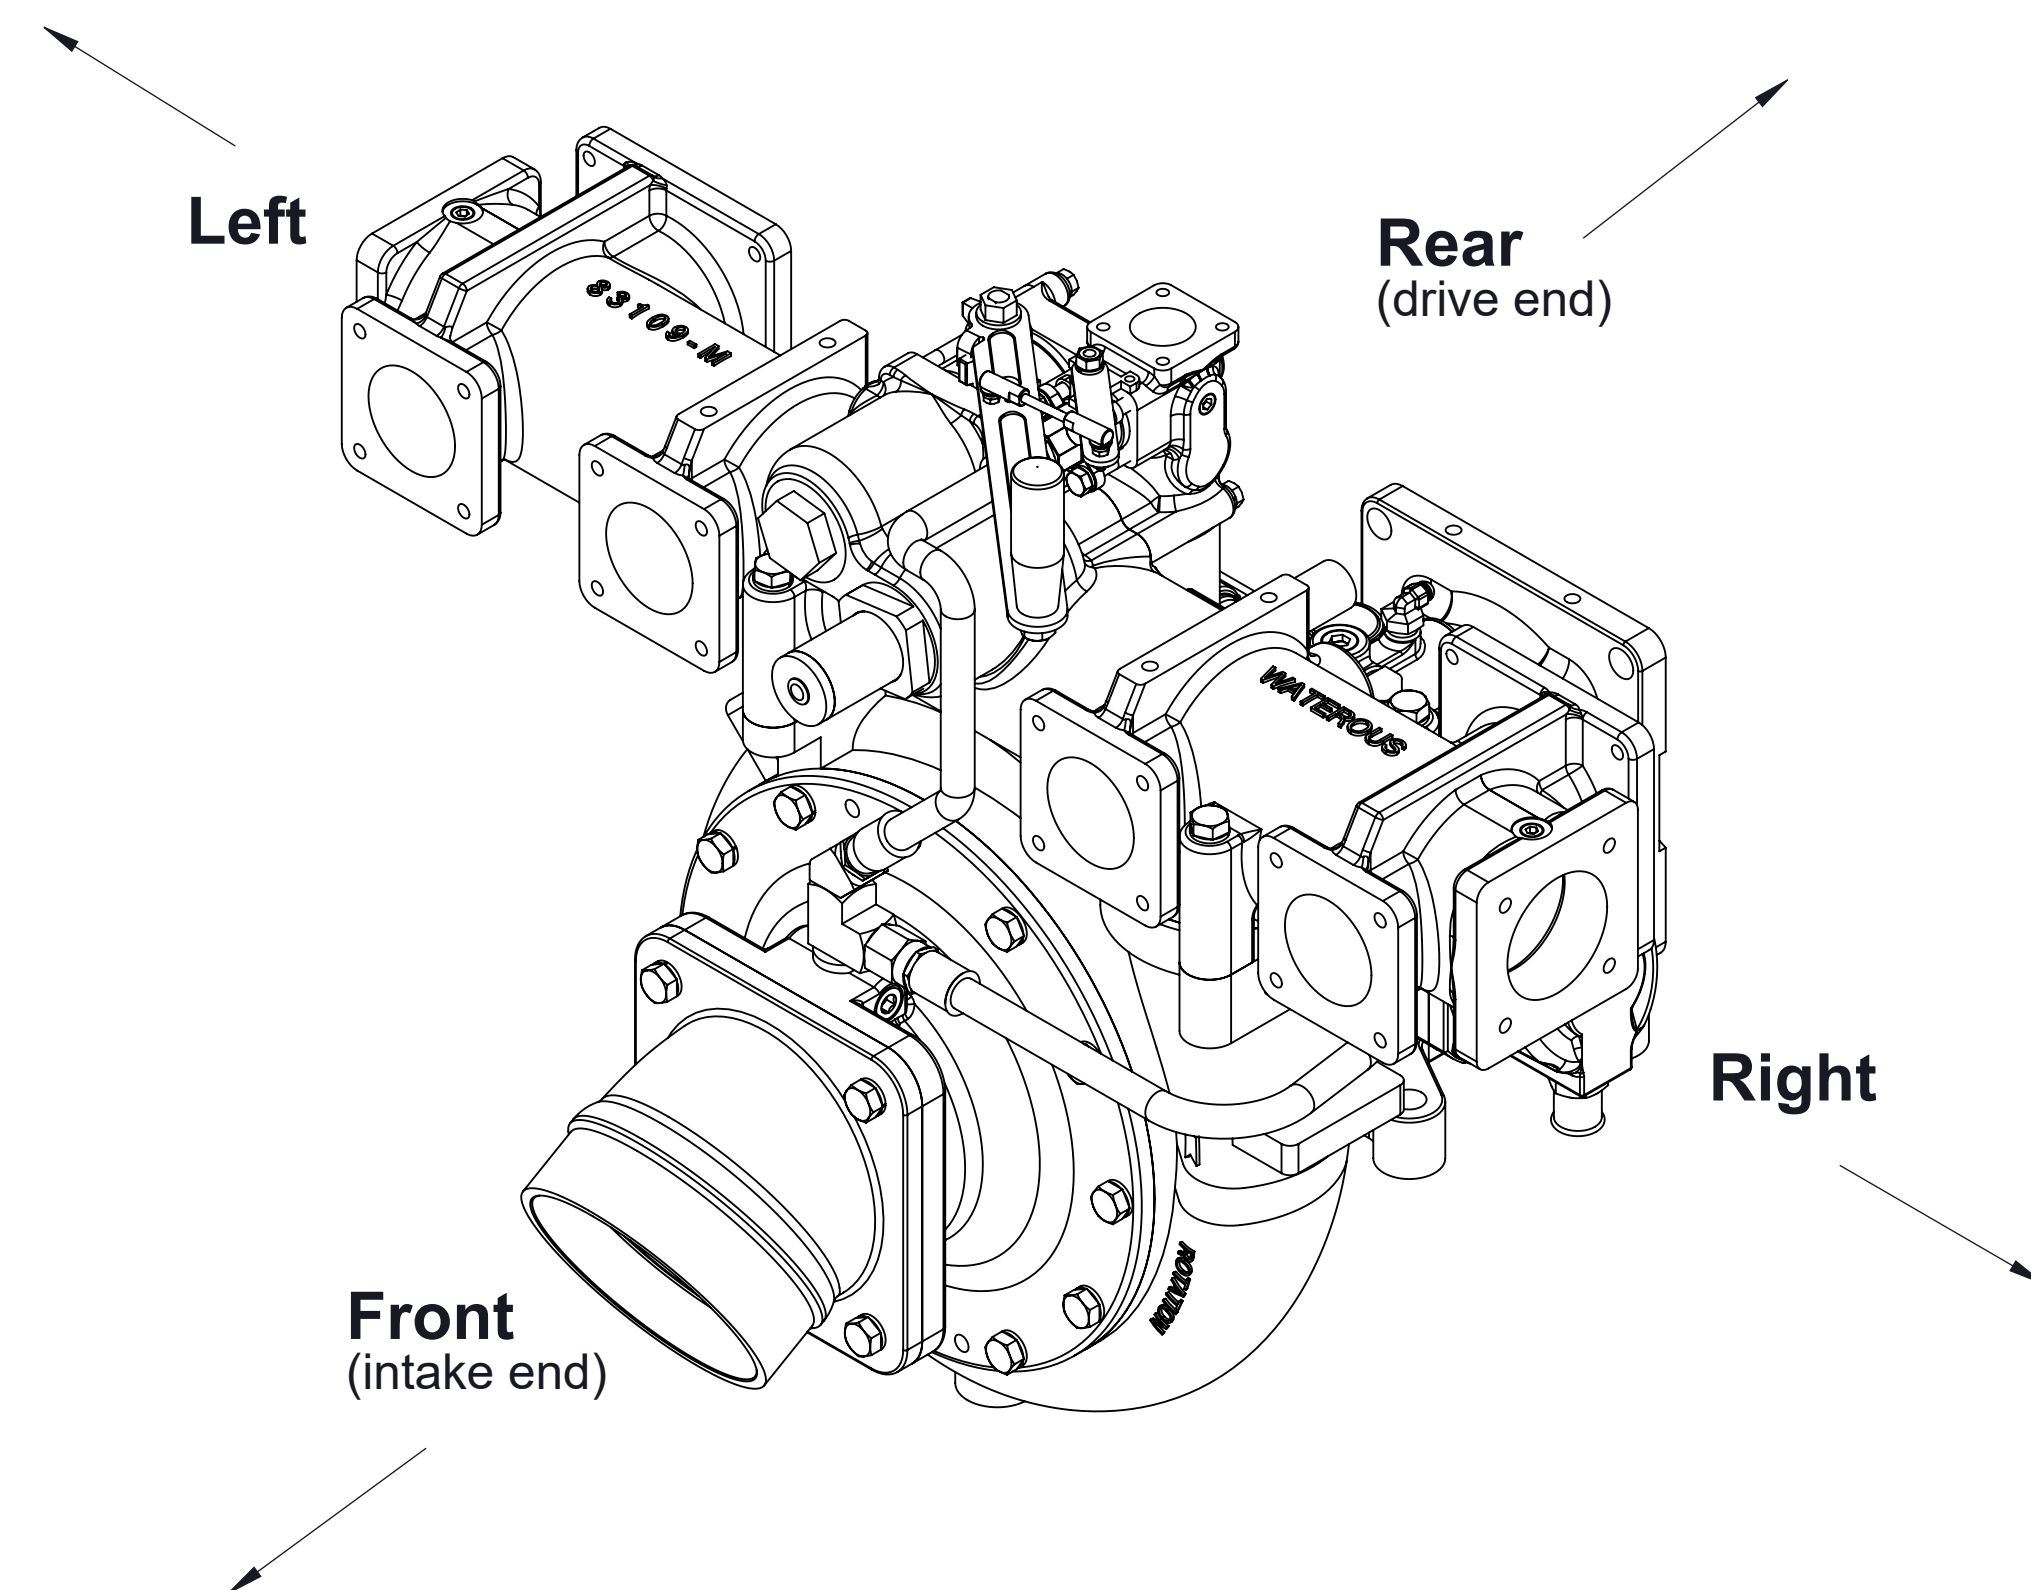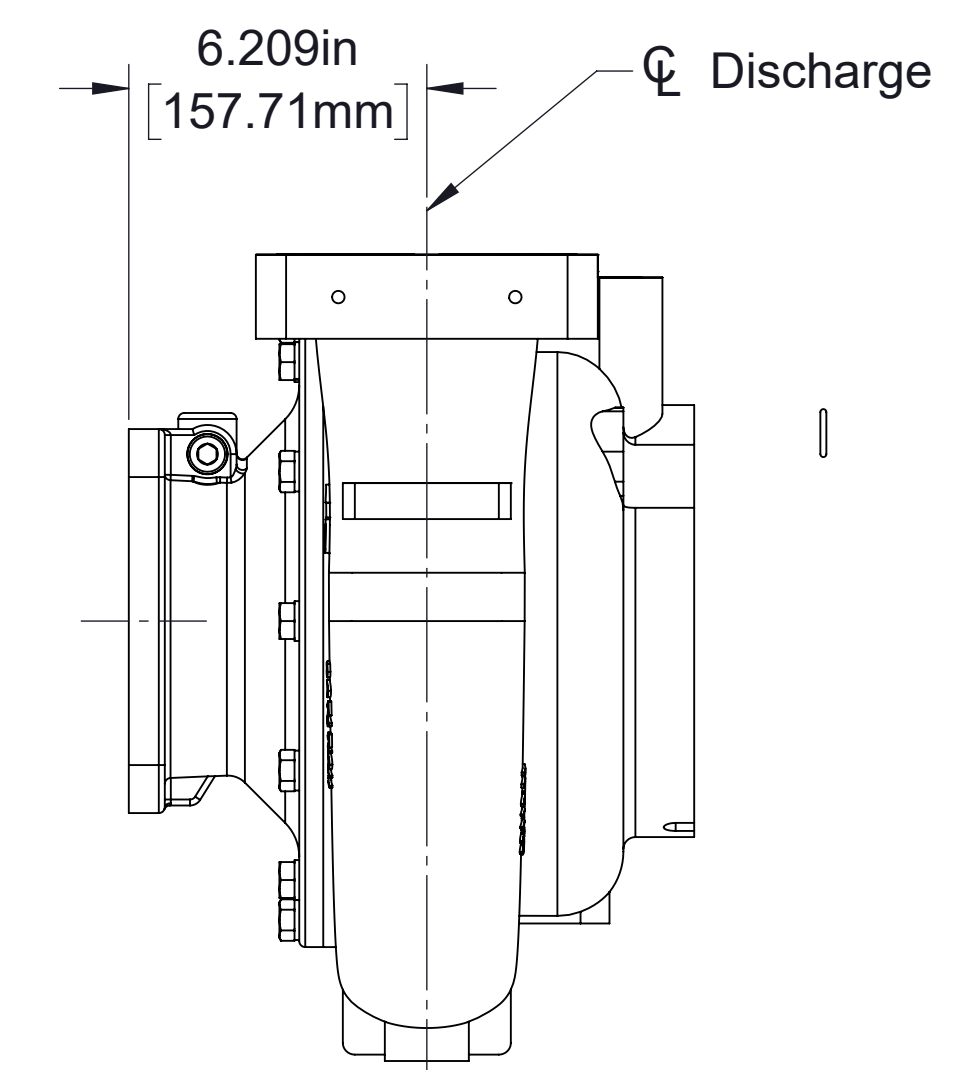



Available Intake Connections

Short length

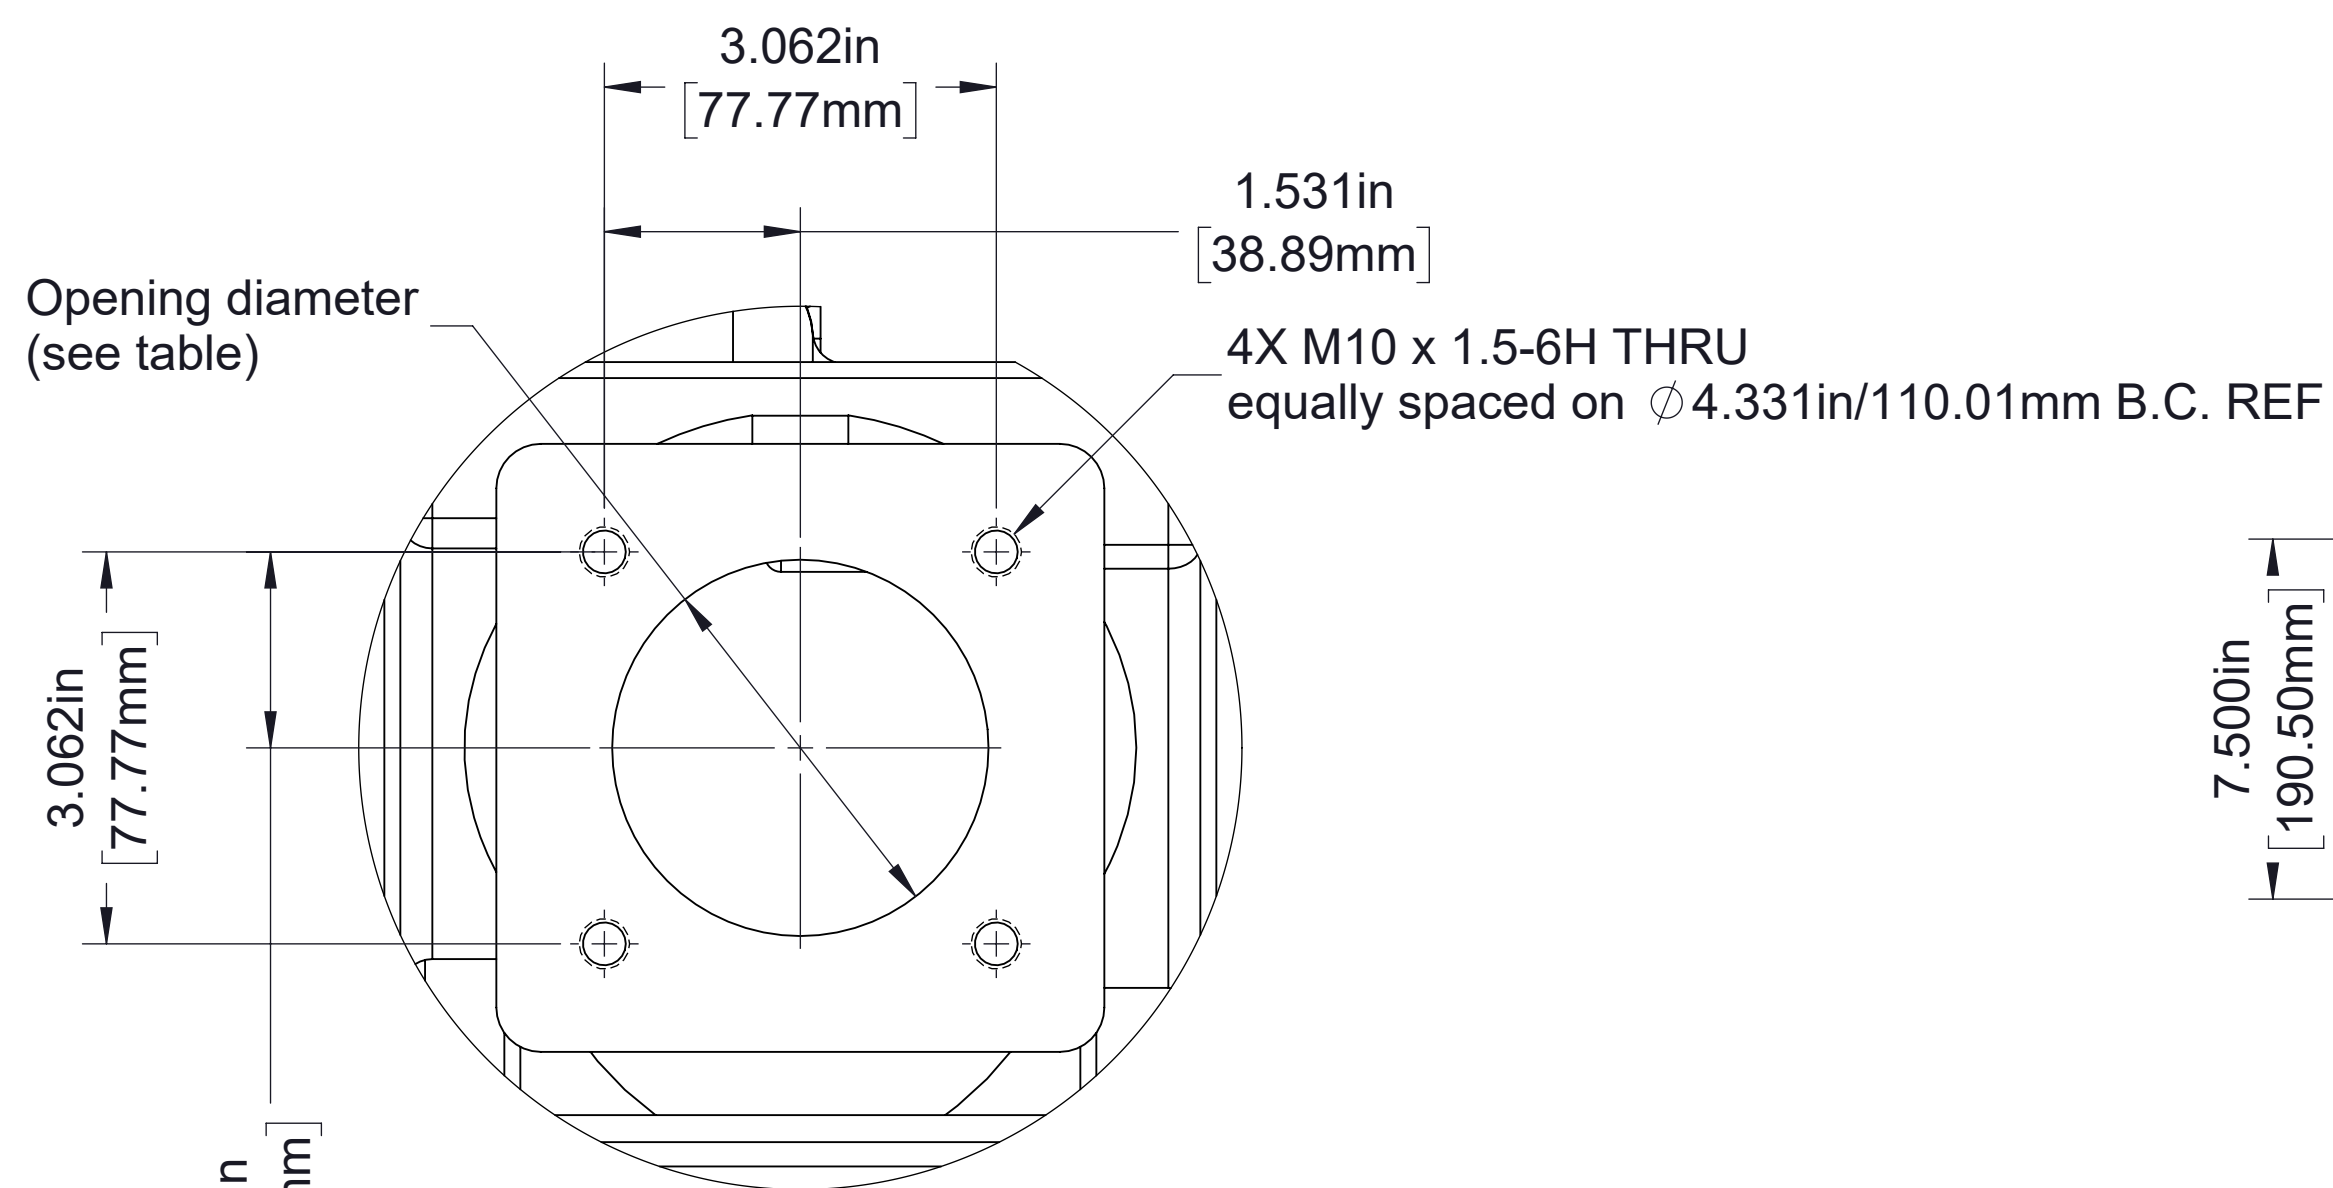


Detail C
65 mm 4-Bolt
See page 11 for auxiliary fittings
which may be mounted on this pad



Pad	Opening Diameter
1	Ø2.940in/74.68mm
2	
3	
4	Ø2.550in/64.77mm
8	
9	

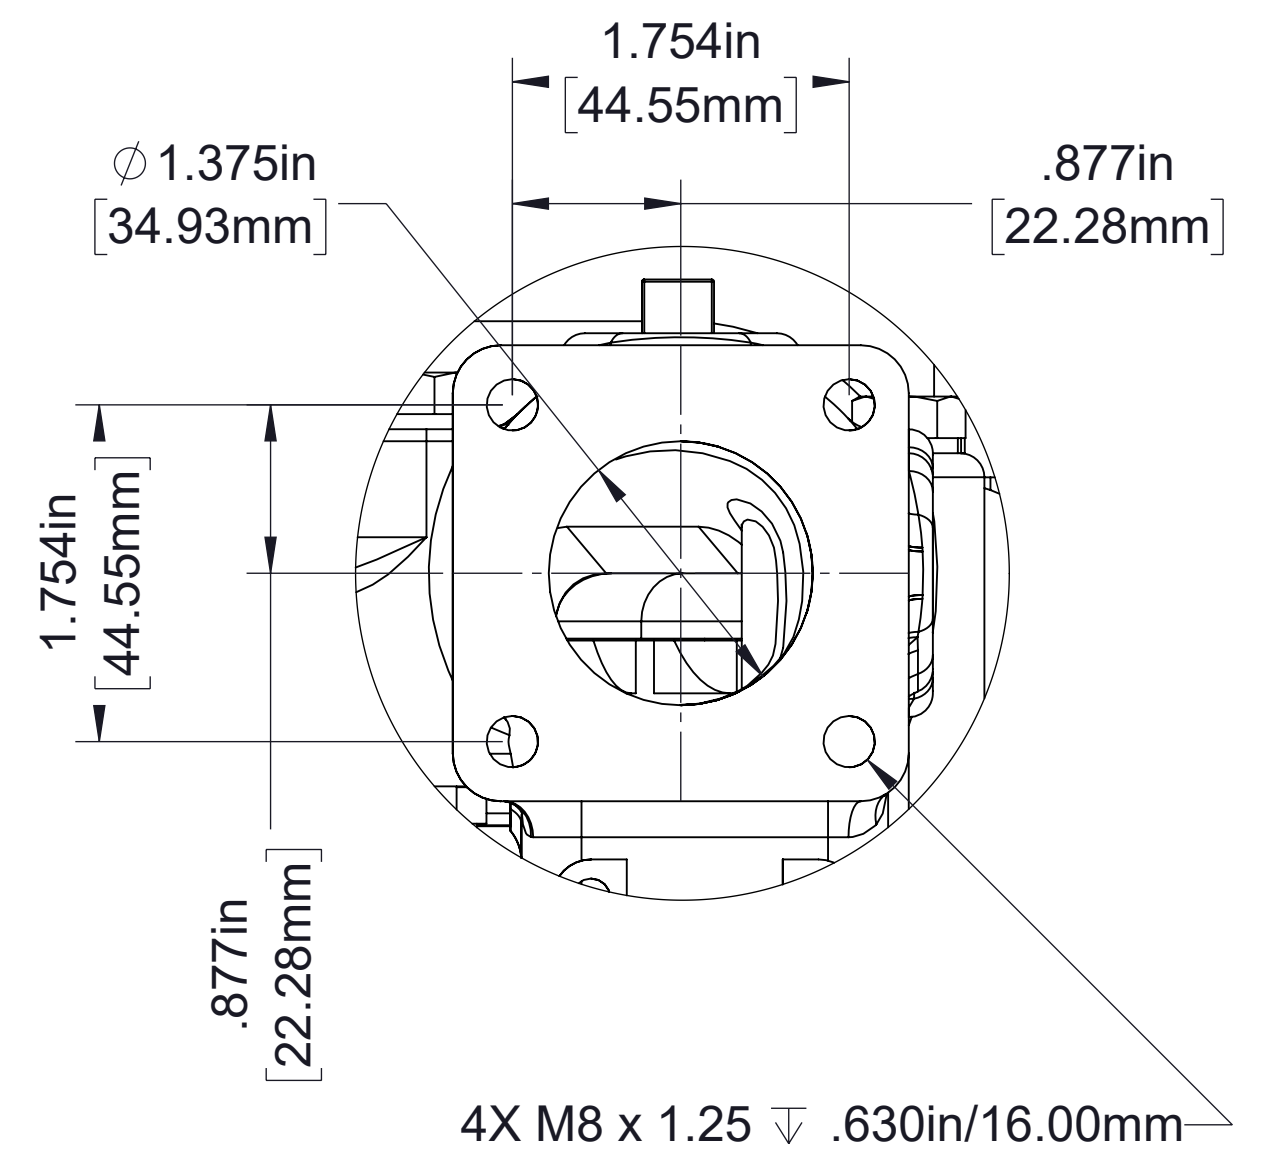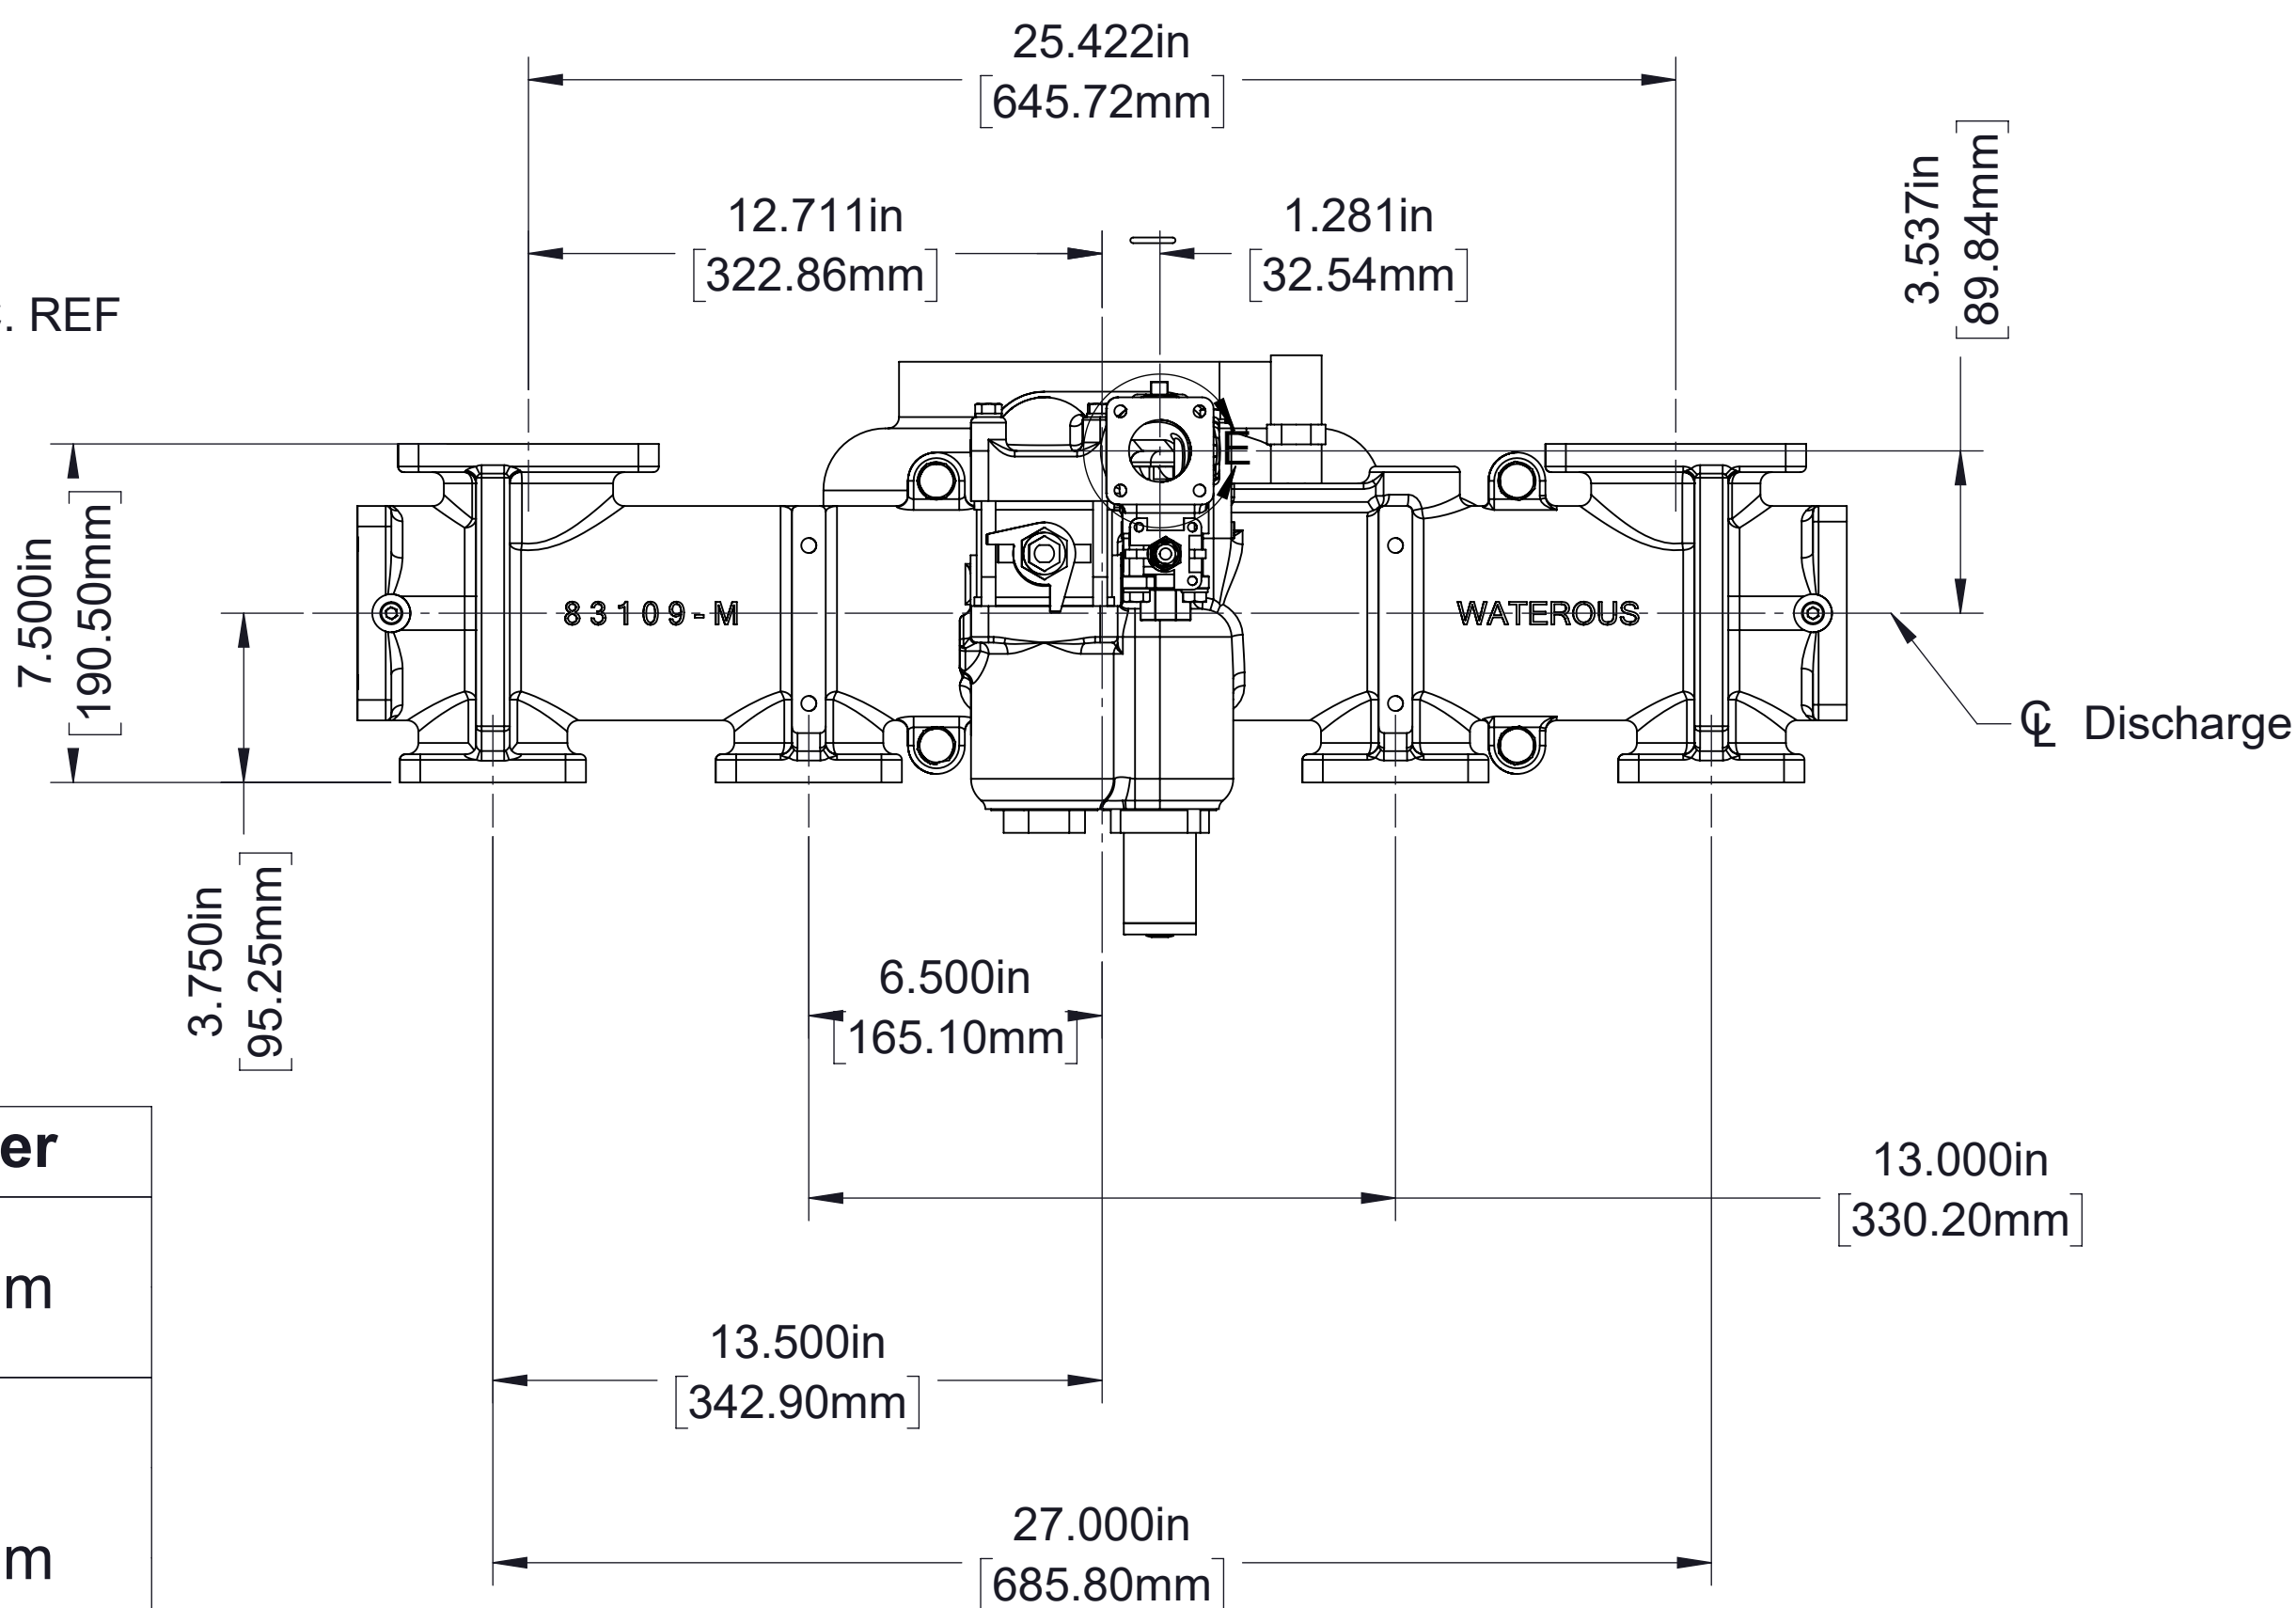


Detail B
35 mm 4-Bolt
See page 11 for auxiliary fittings
which may be mounted on this pad

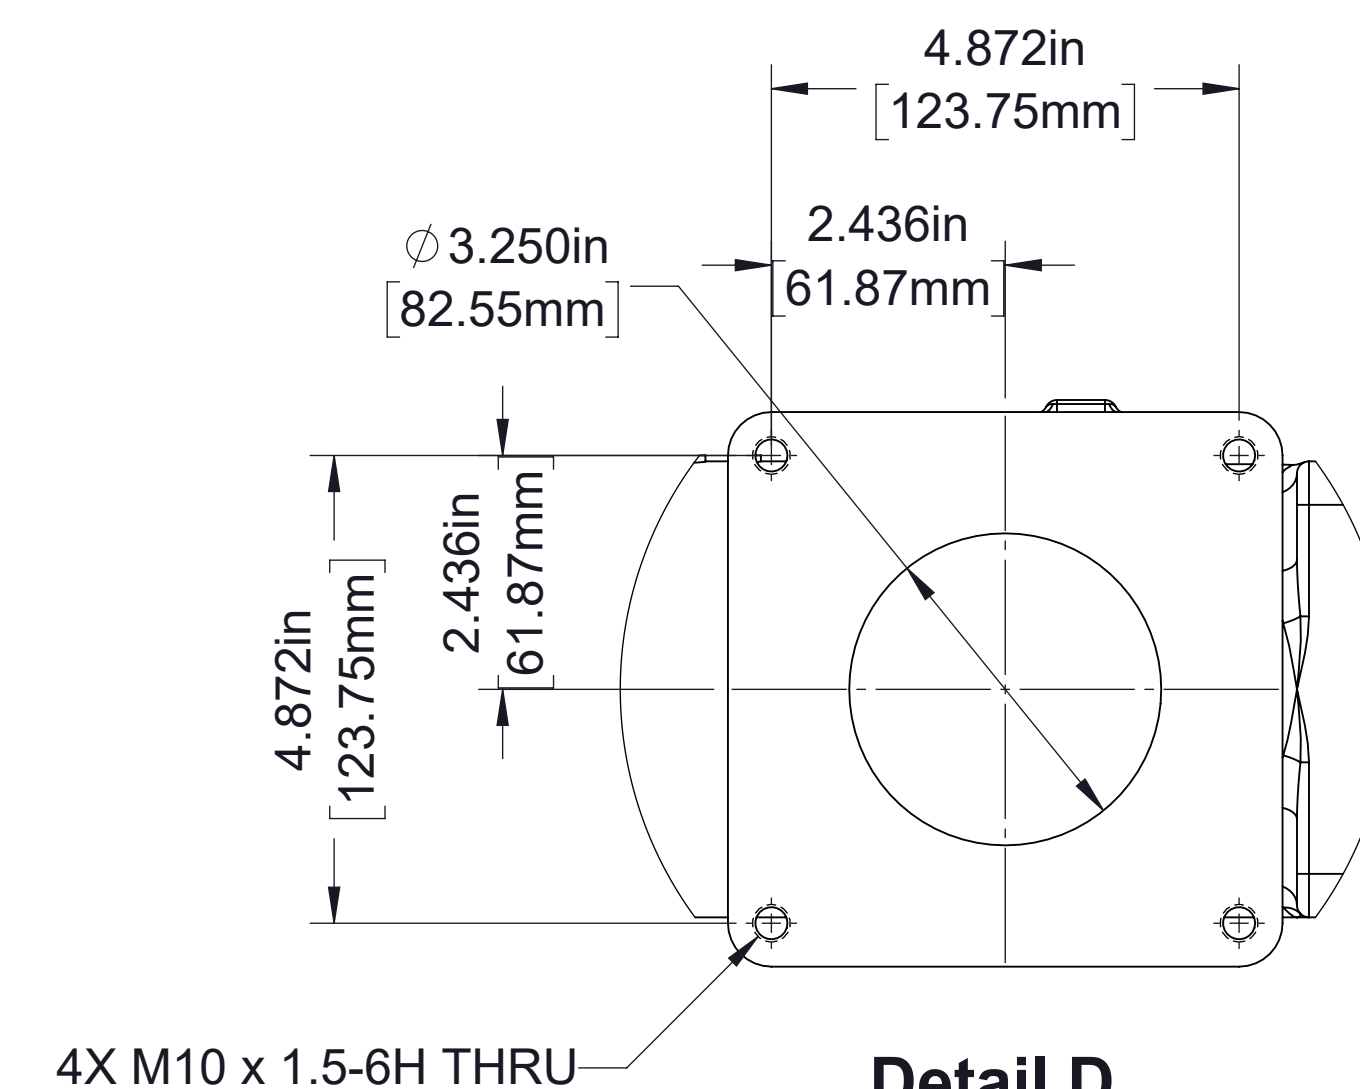


Detail D
80 mm 4-Bolt
See page 12 for auxiliary fittings
which may be mounted on this pad

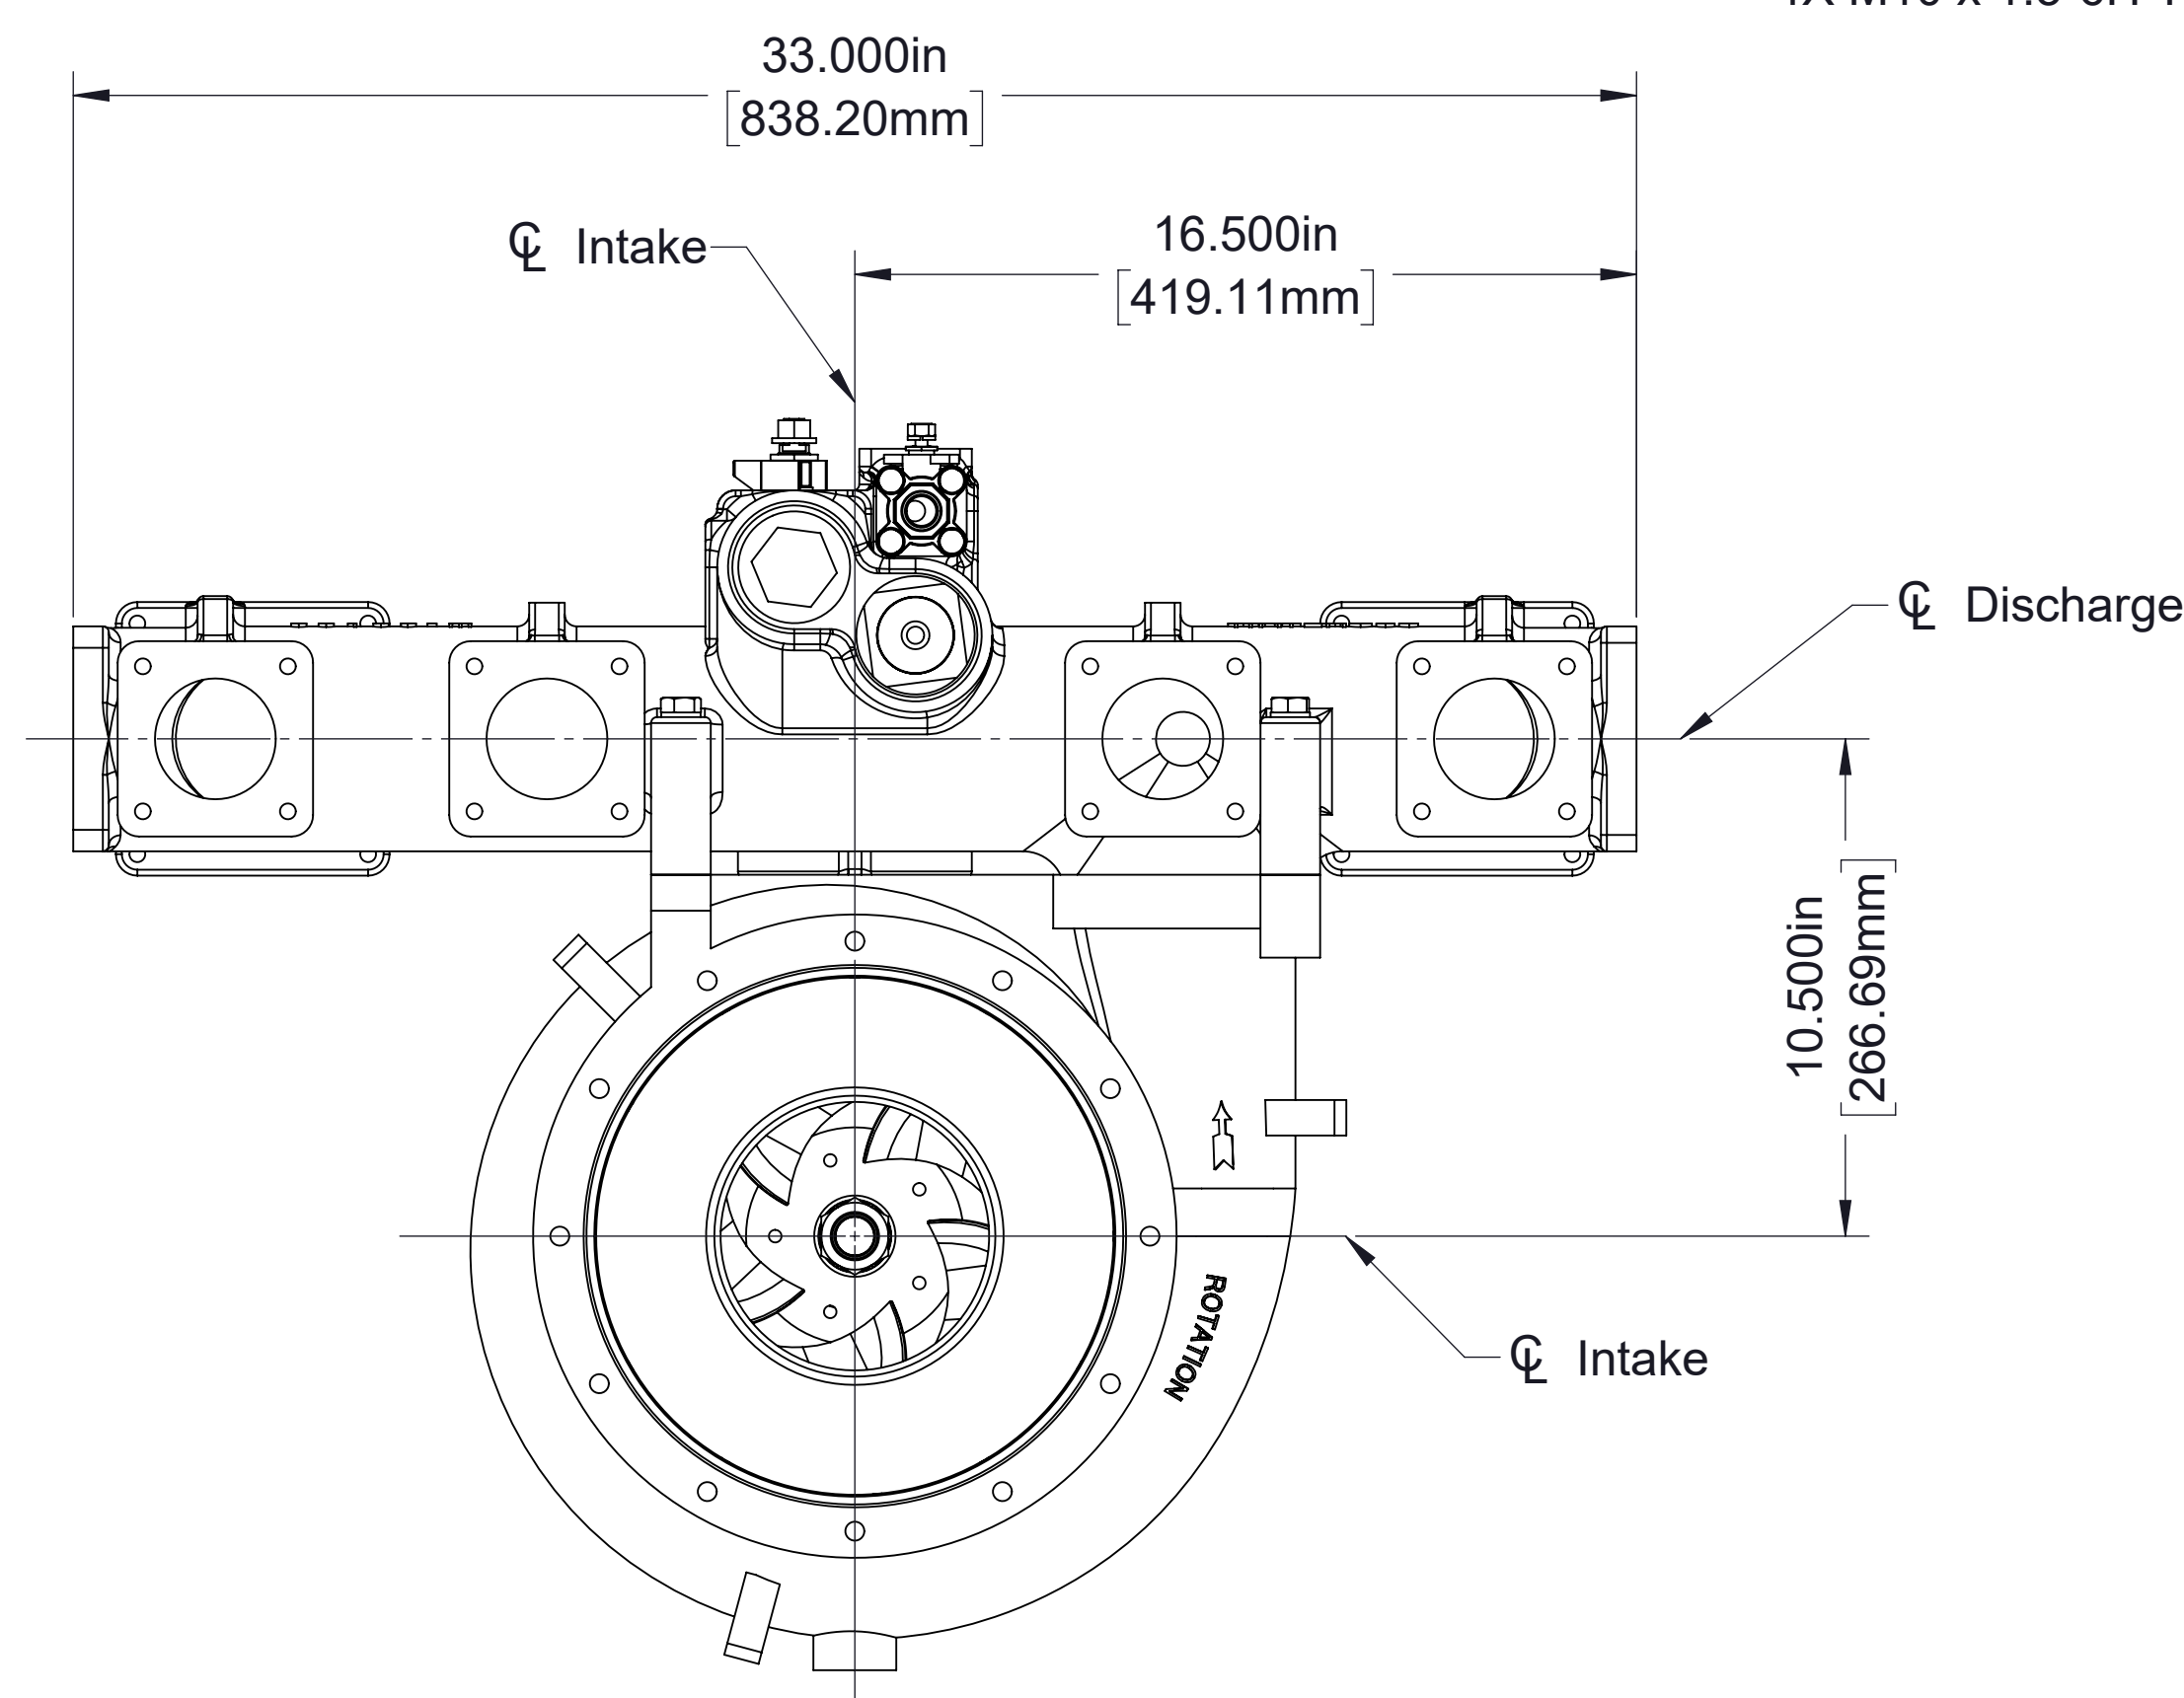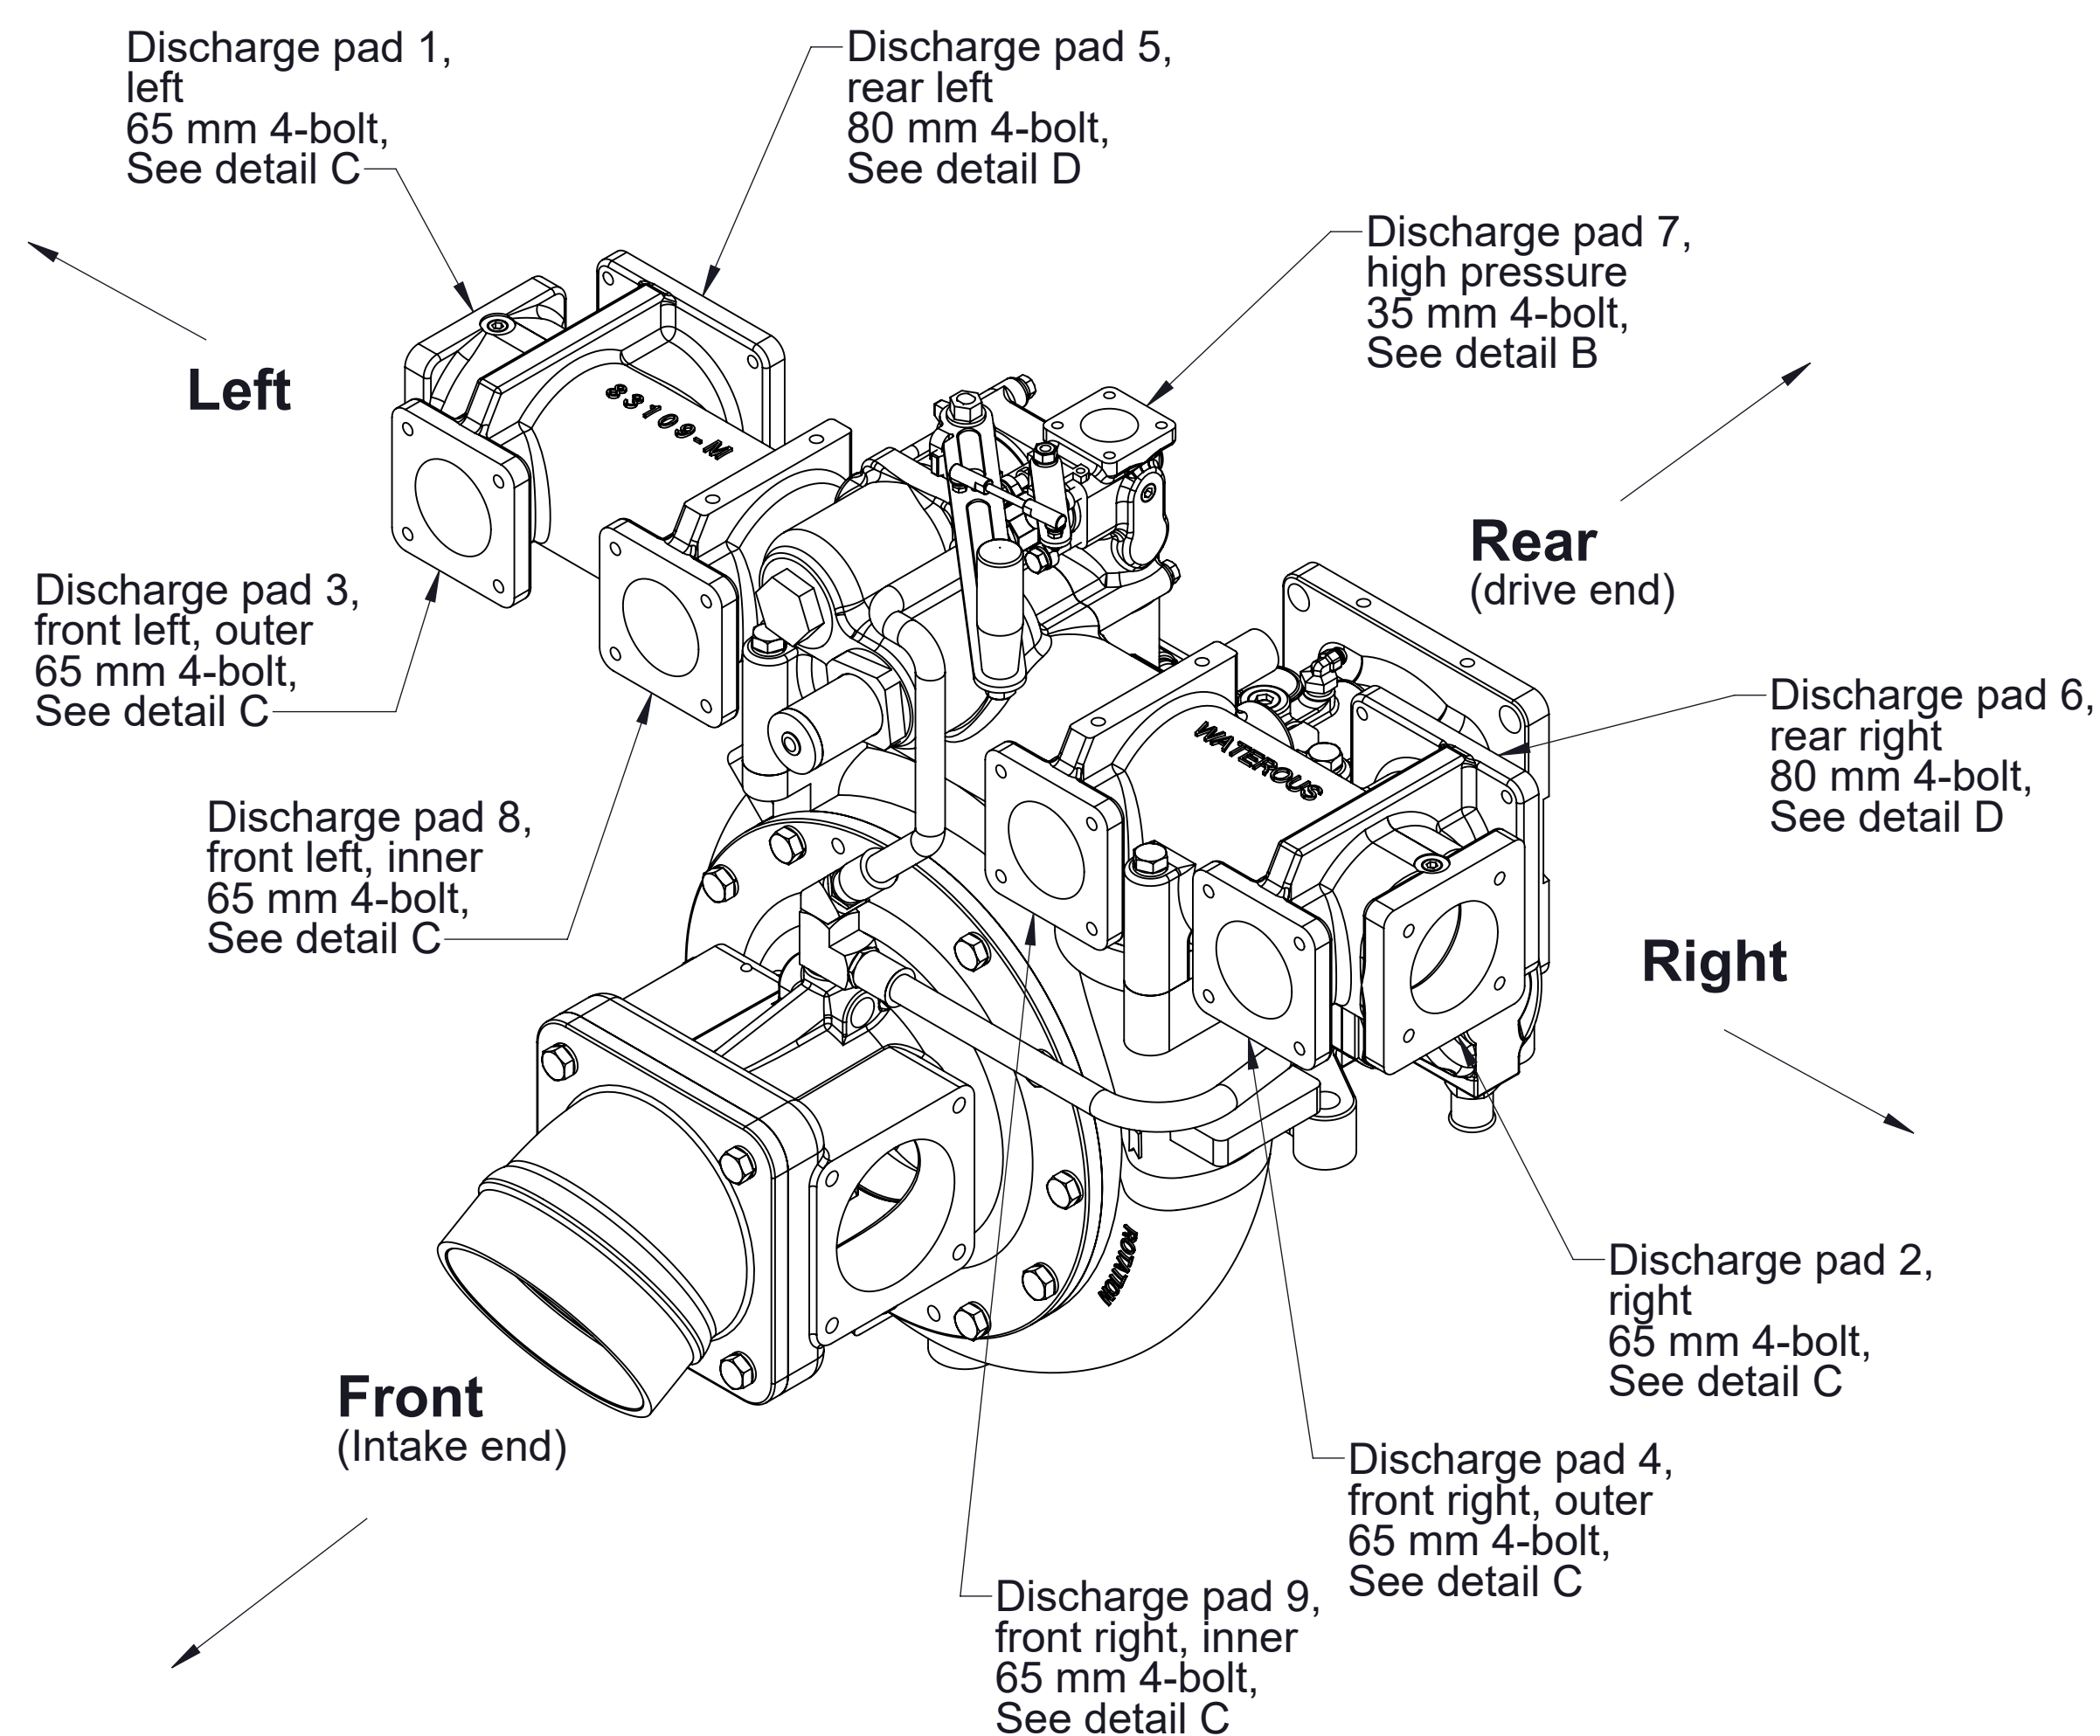


Discharge Manifold

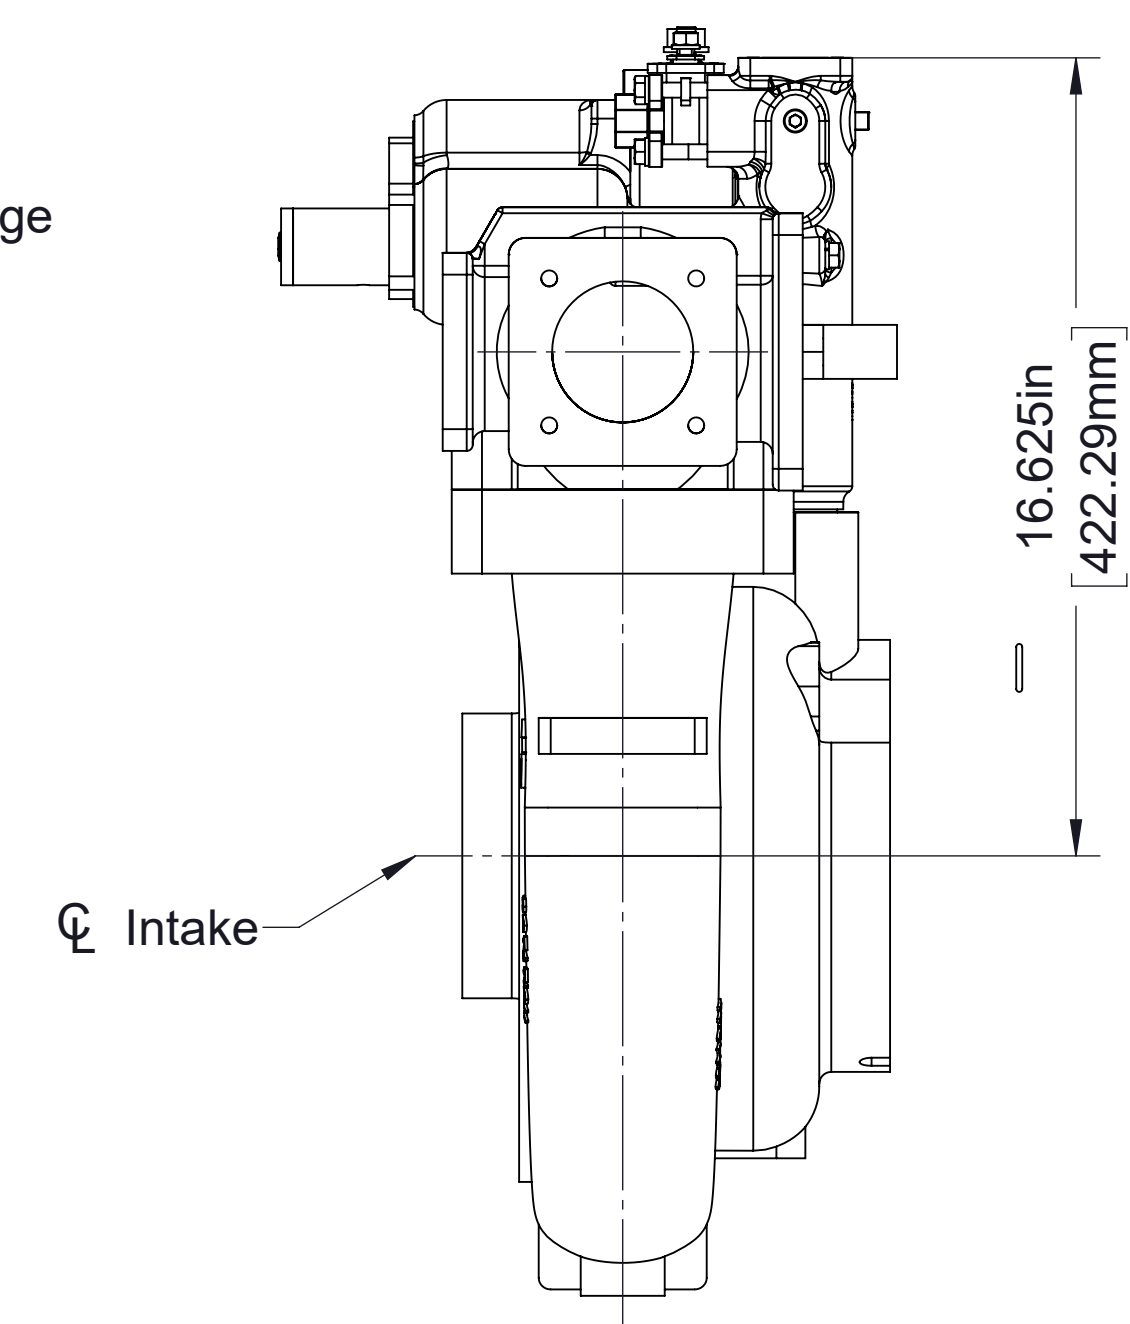

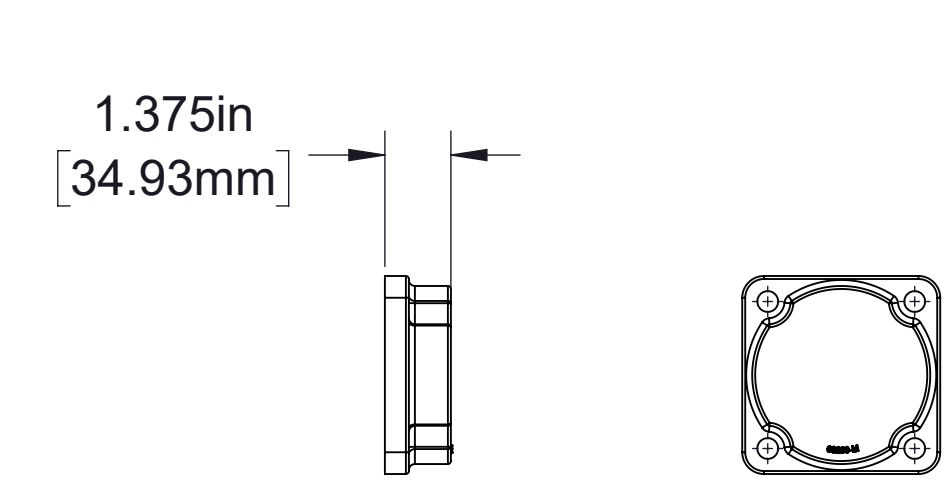


Blind Flange

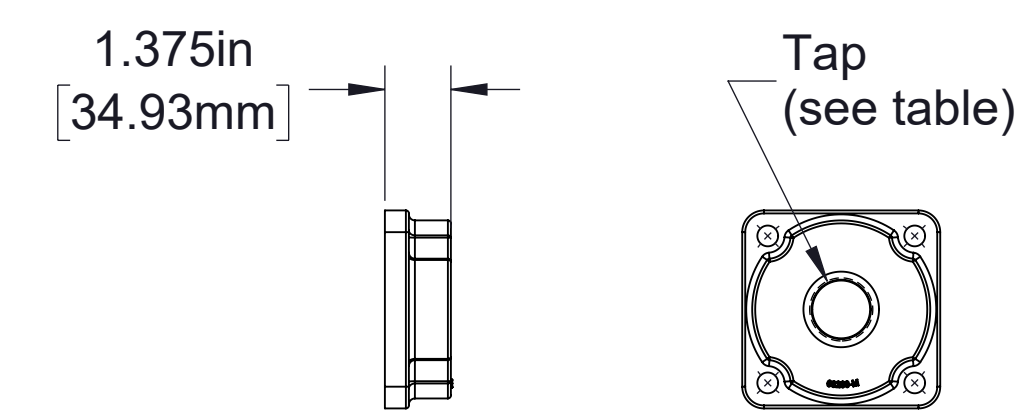


Tap Options
1 in BSP
2-1/2 in BSP
1 in NPT

Tapped Flanges

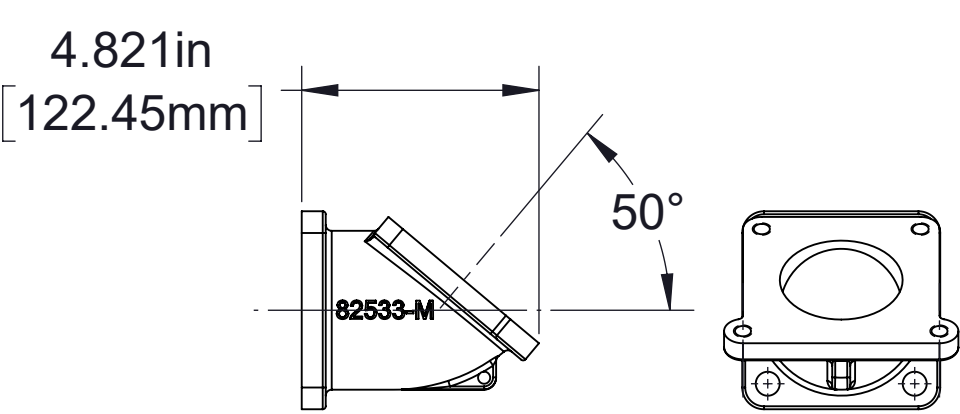


30° Elbow

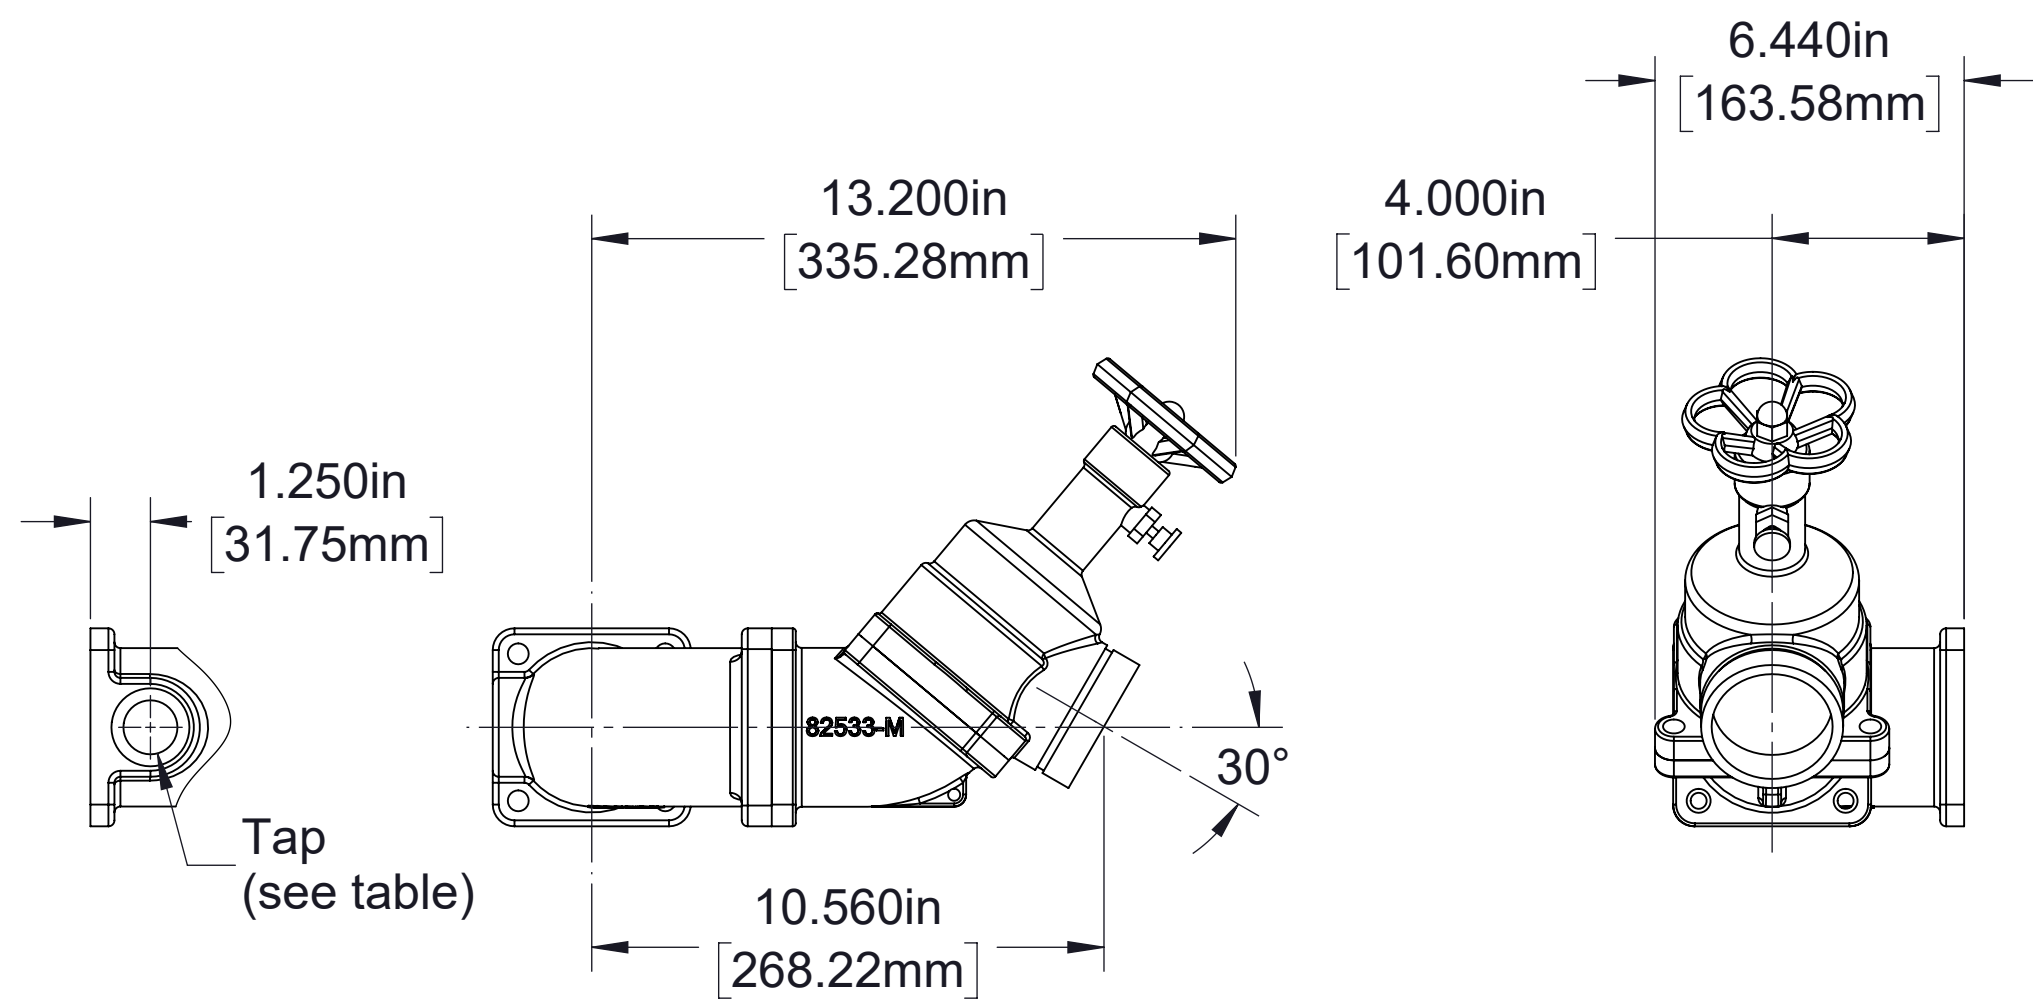


Tap Options
1 in BSP (open)
1 in BSP (plugged)
1 in NPT (open)
1 in NPT (plugged)

2-1/2 in BSP Valve with 30° and 90° Elbows

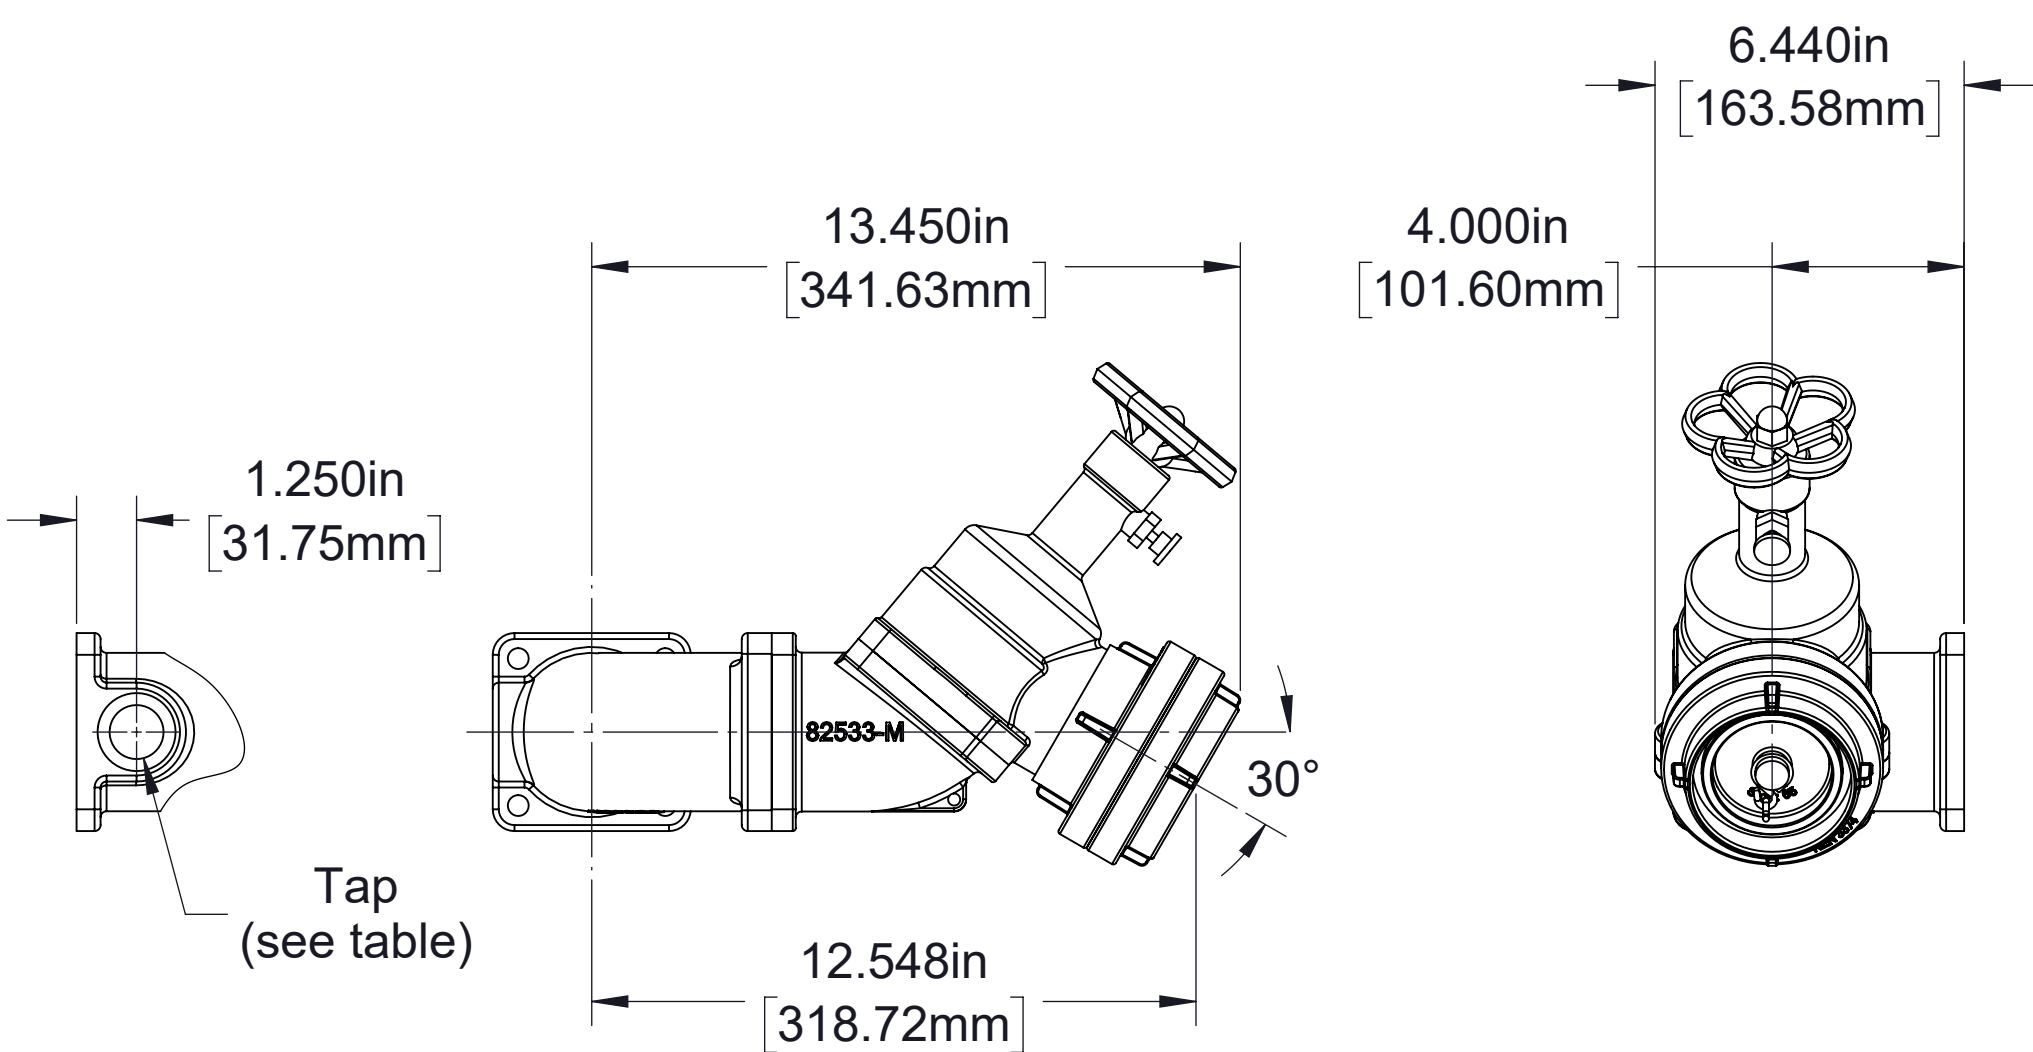


Tap Options
1 in BSP (open)
1 in BSP (plugged)
1 in NPT (open)
1 in NPT (plugged)


65 mm Storz Valve with 30° and 90° Elbows

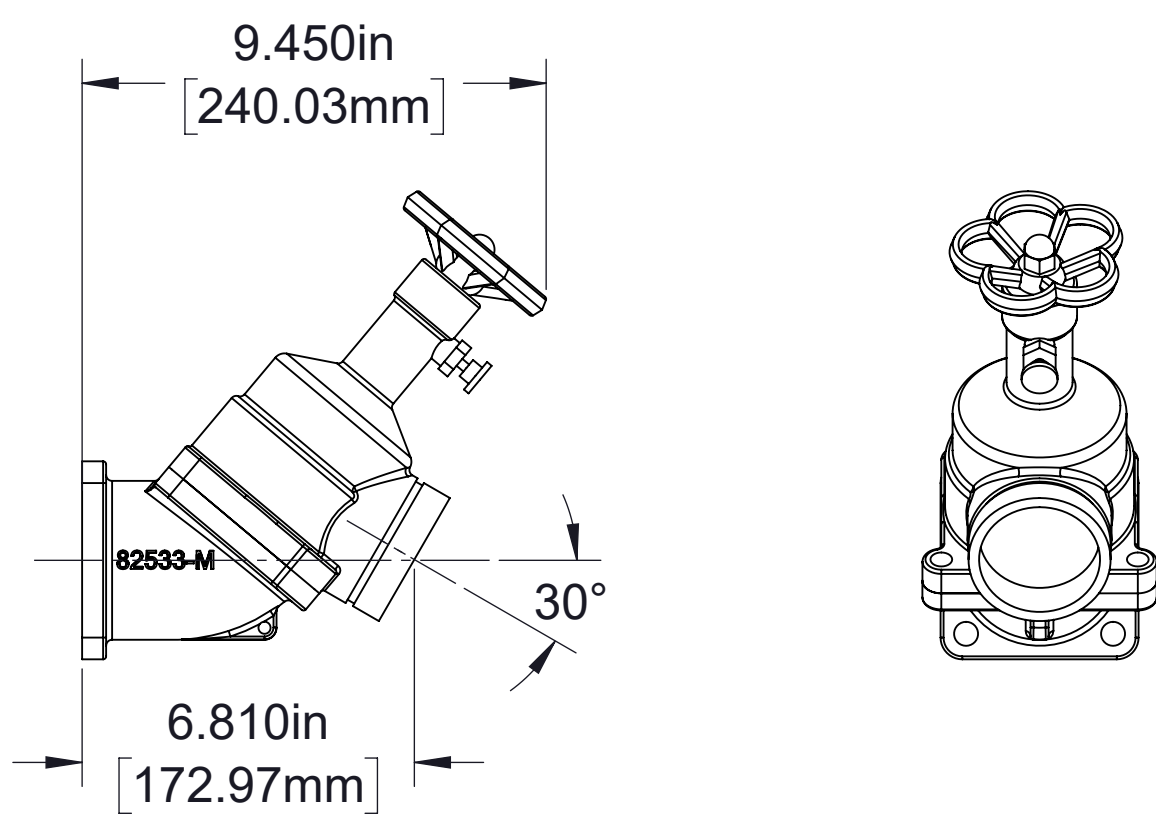

2-1/2 in BSP Valve with 30° Elbow


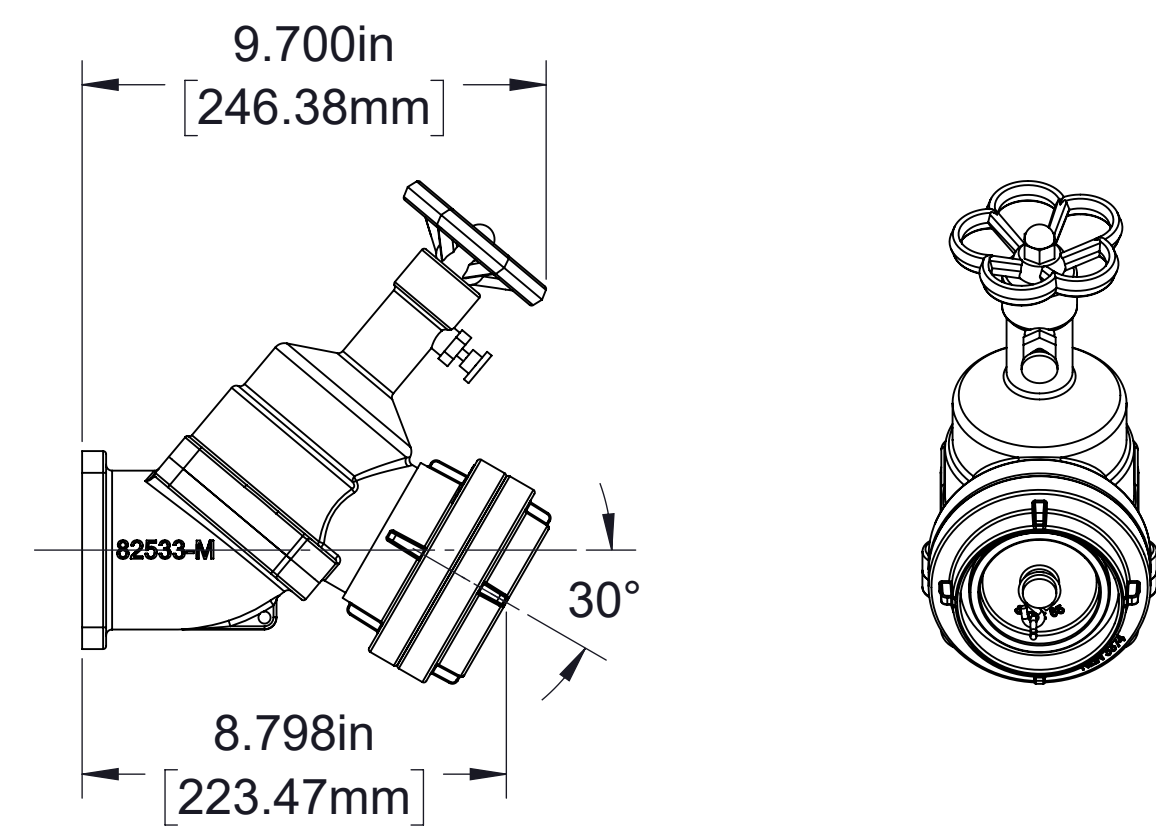


65 mm Storz Valve with 30° Elbow

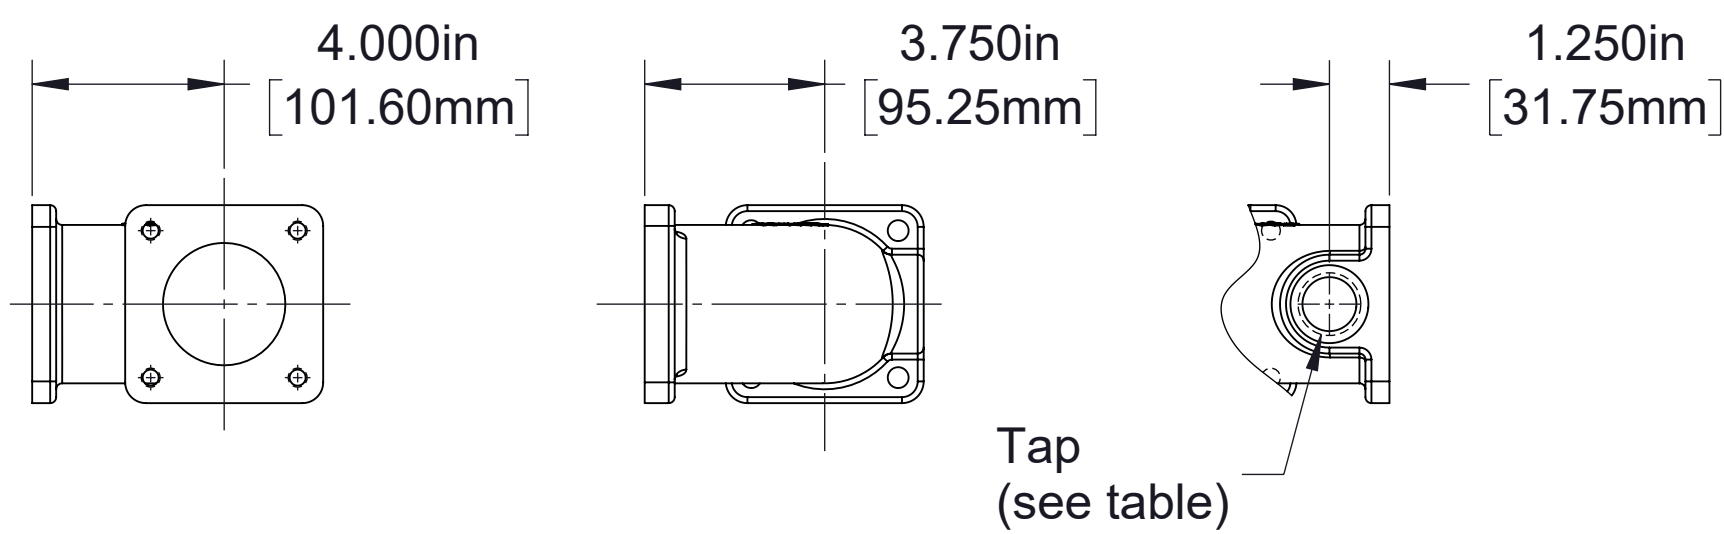


Tap Options
1 in BSP (open)
1 in BSP (plugged)
1 in NPT (open)
1 in NPT (plugged)

90° Elbows

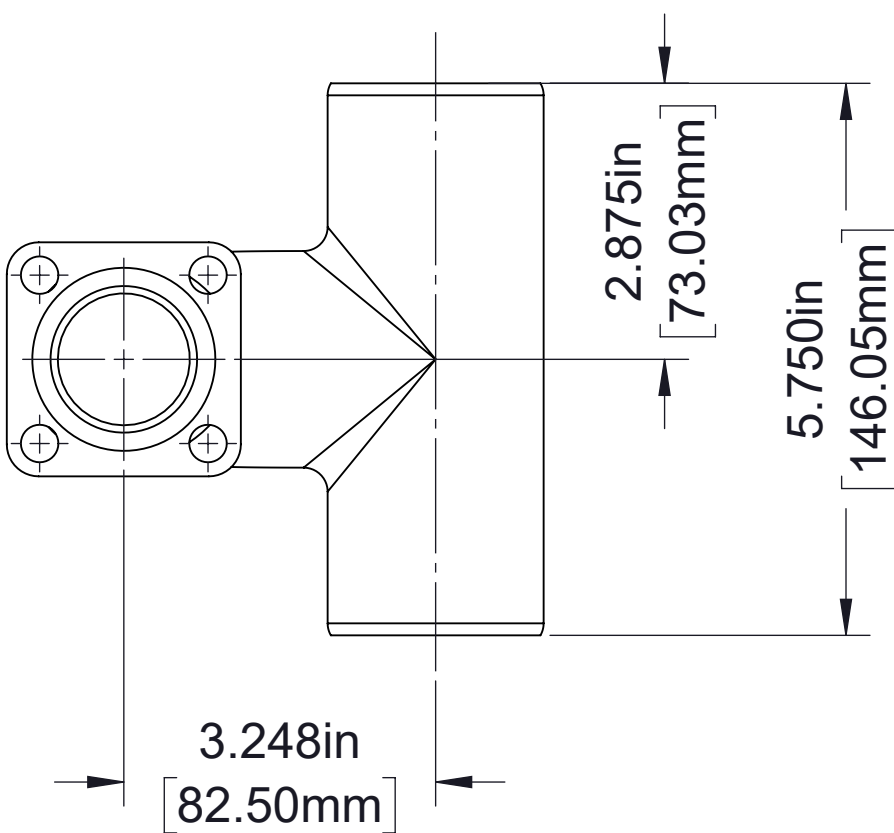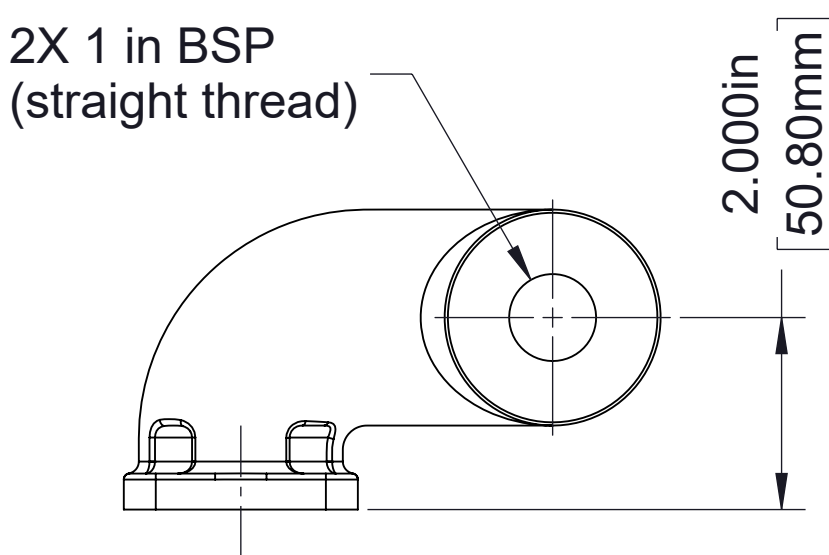







Manifold

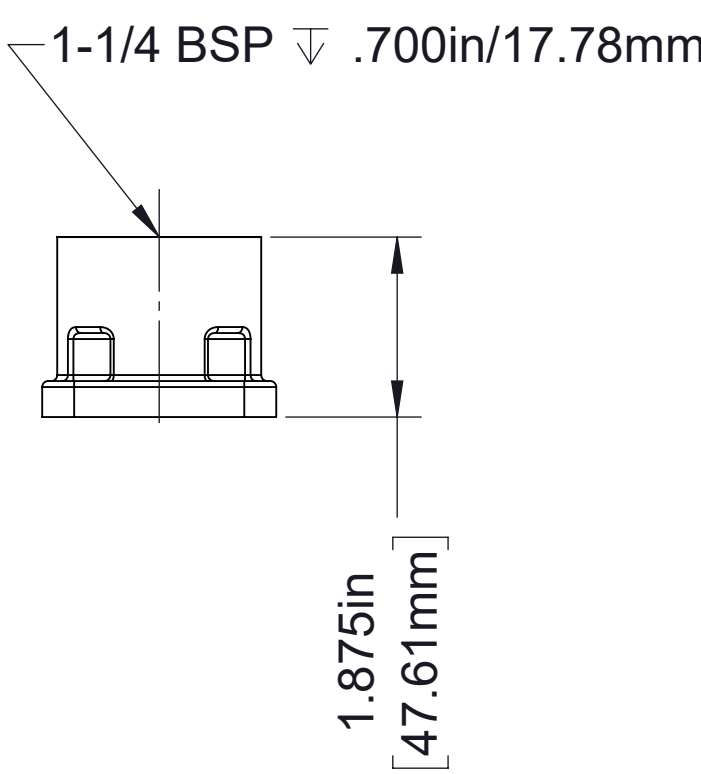

Tapped Flange

35 mm 4-Bolt

65 mm 4-Bolt

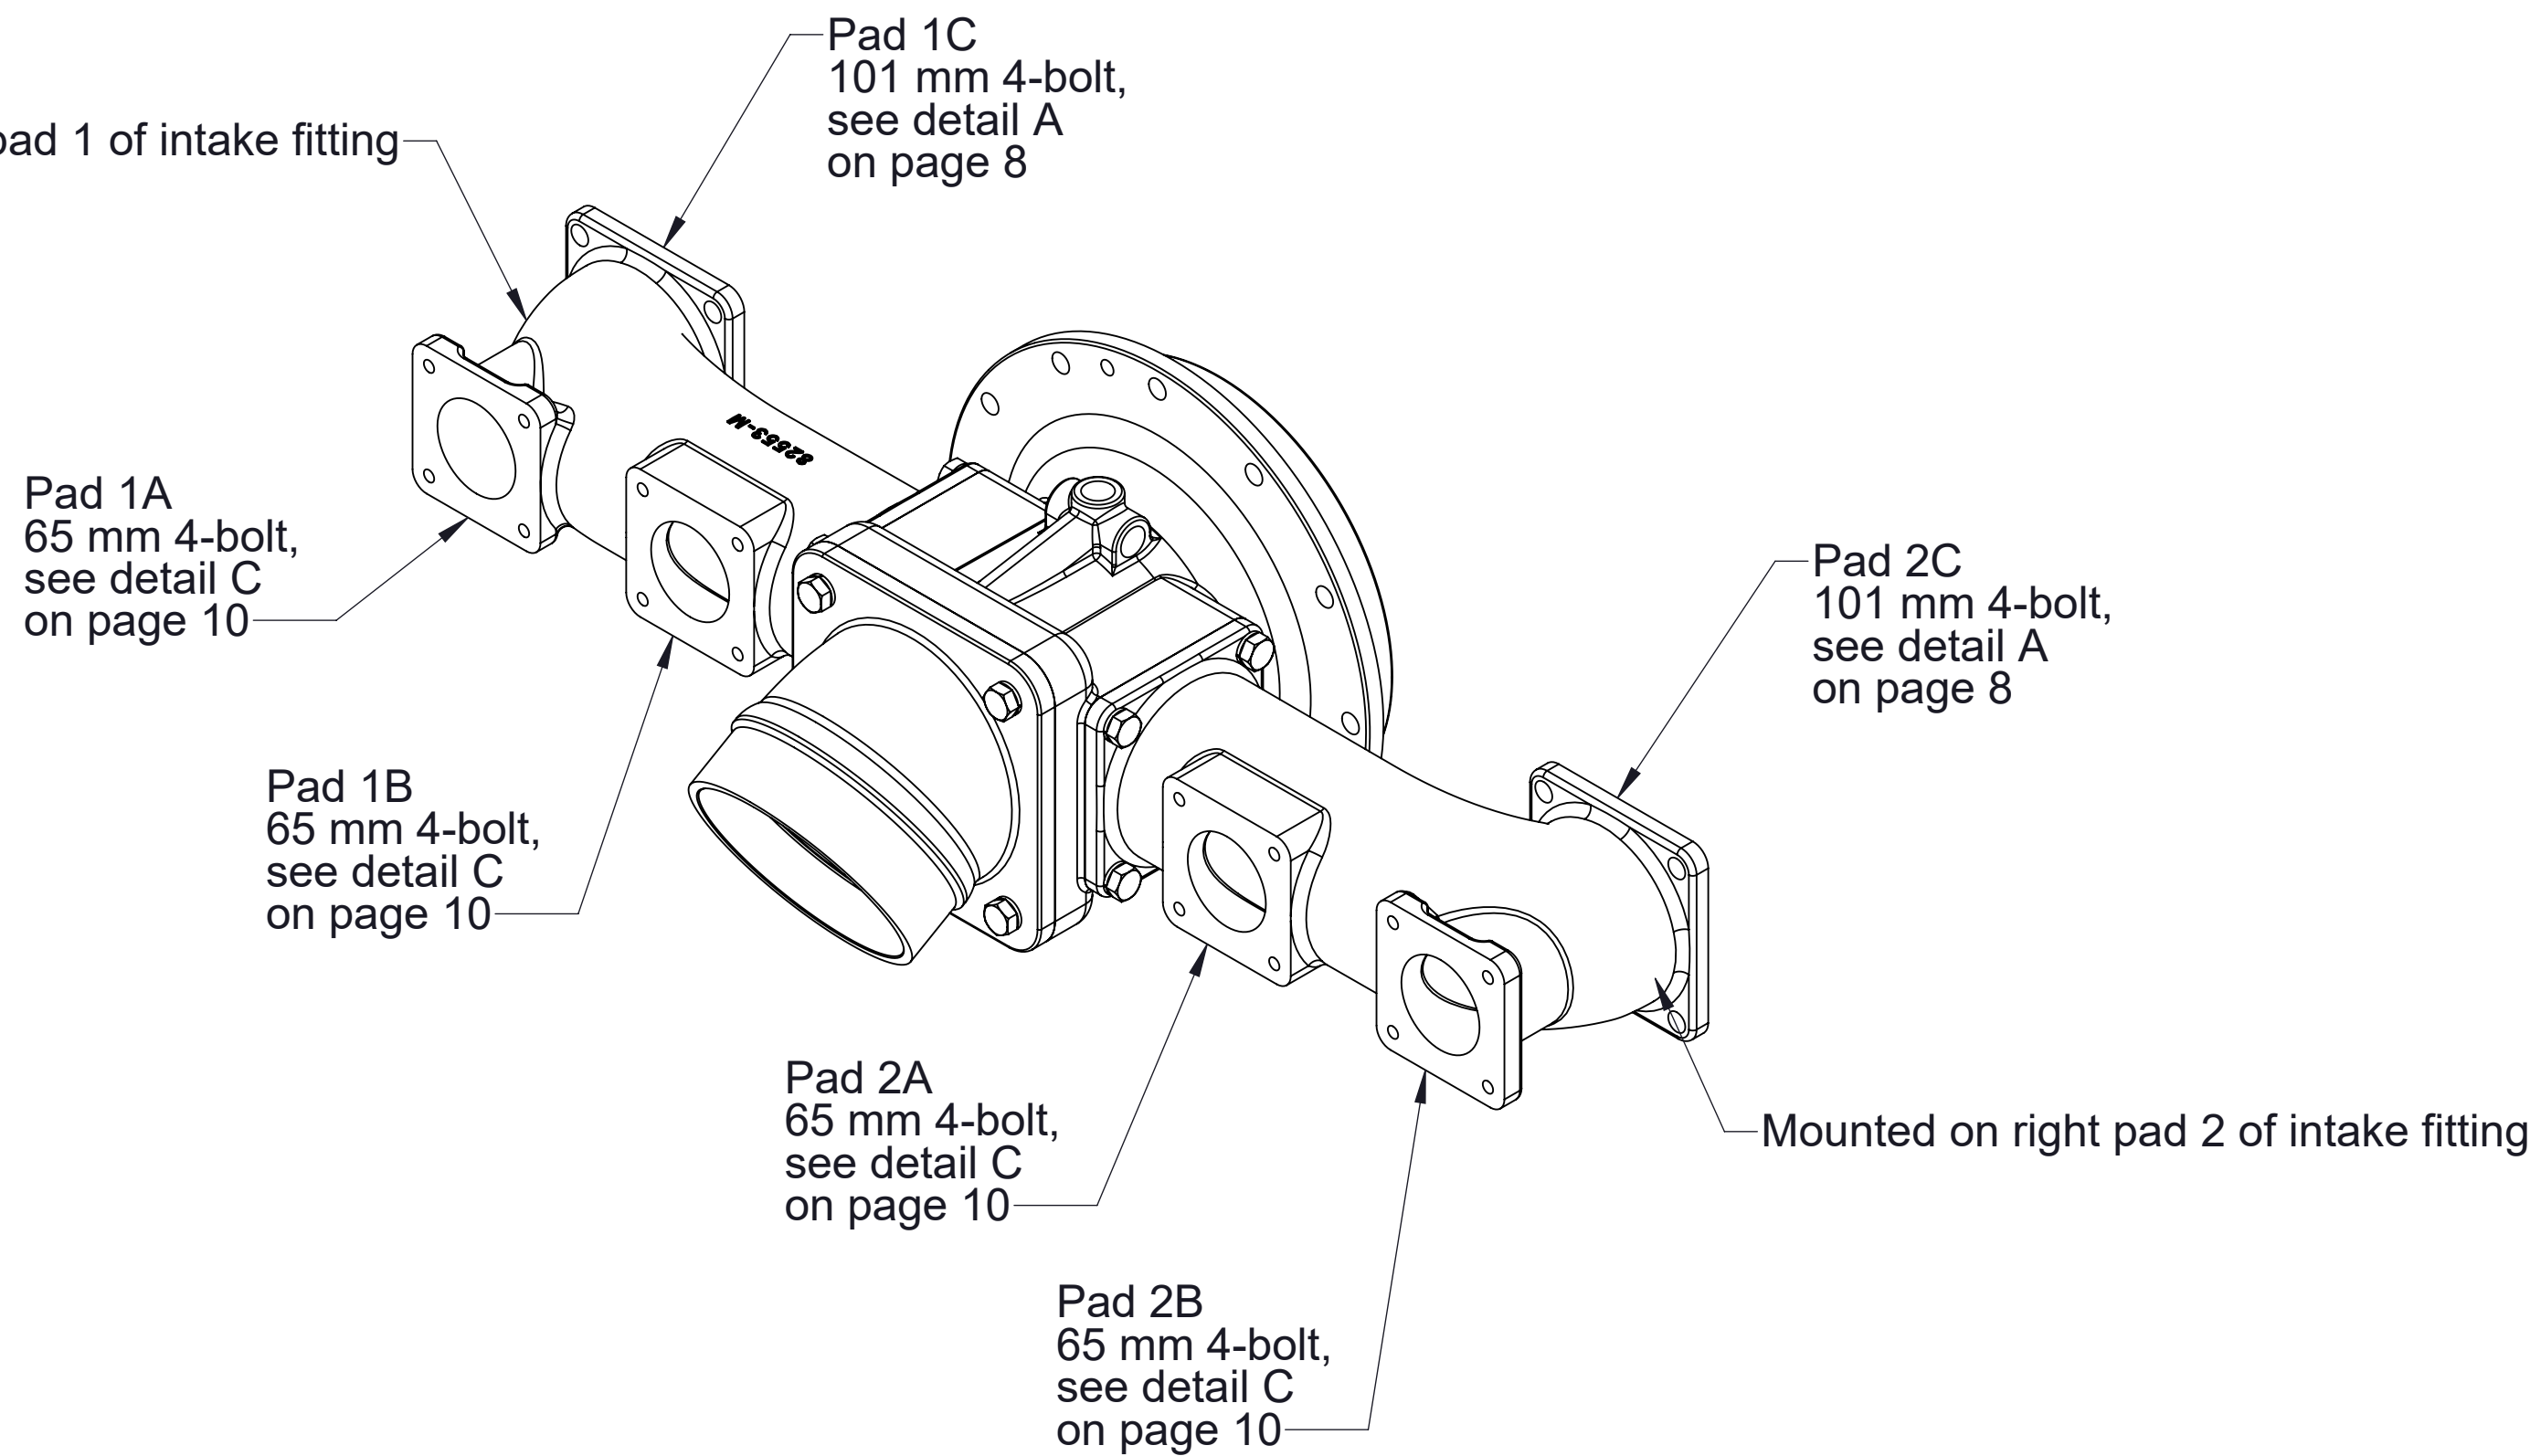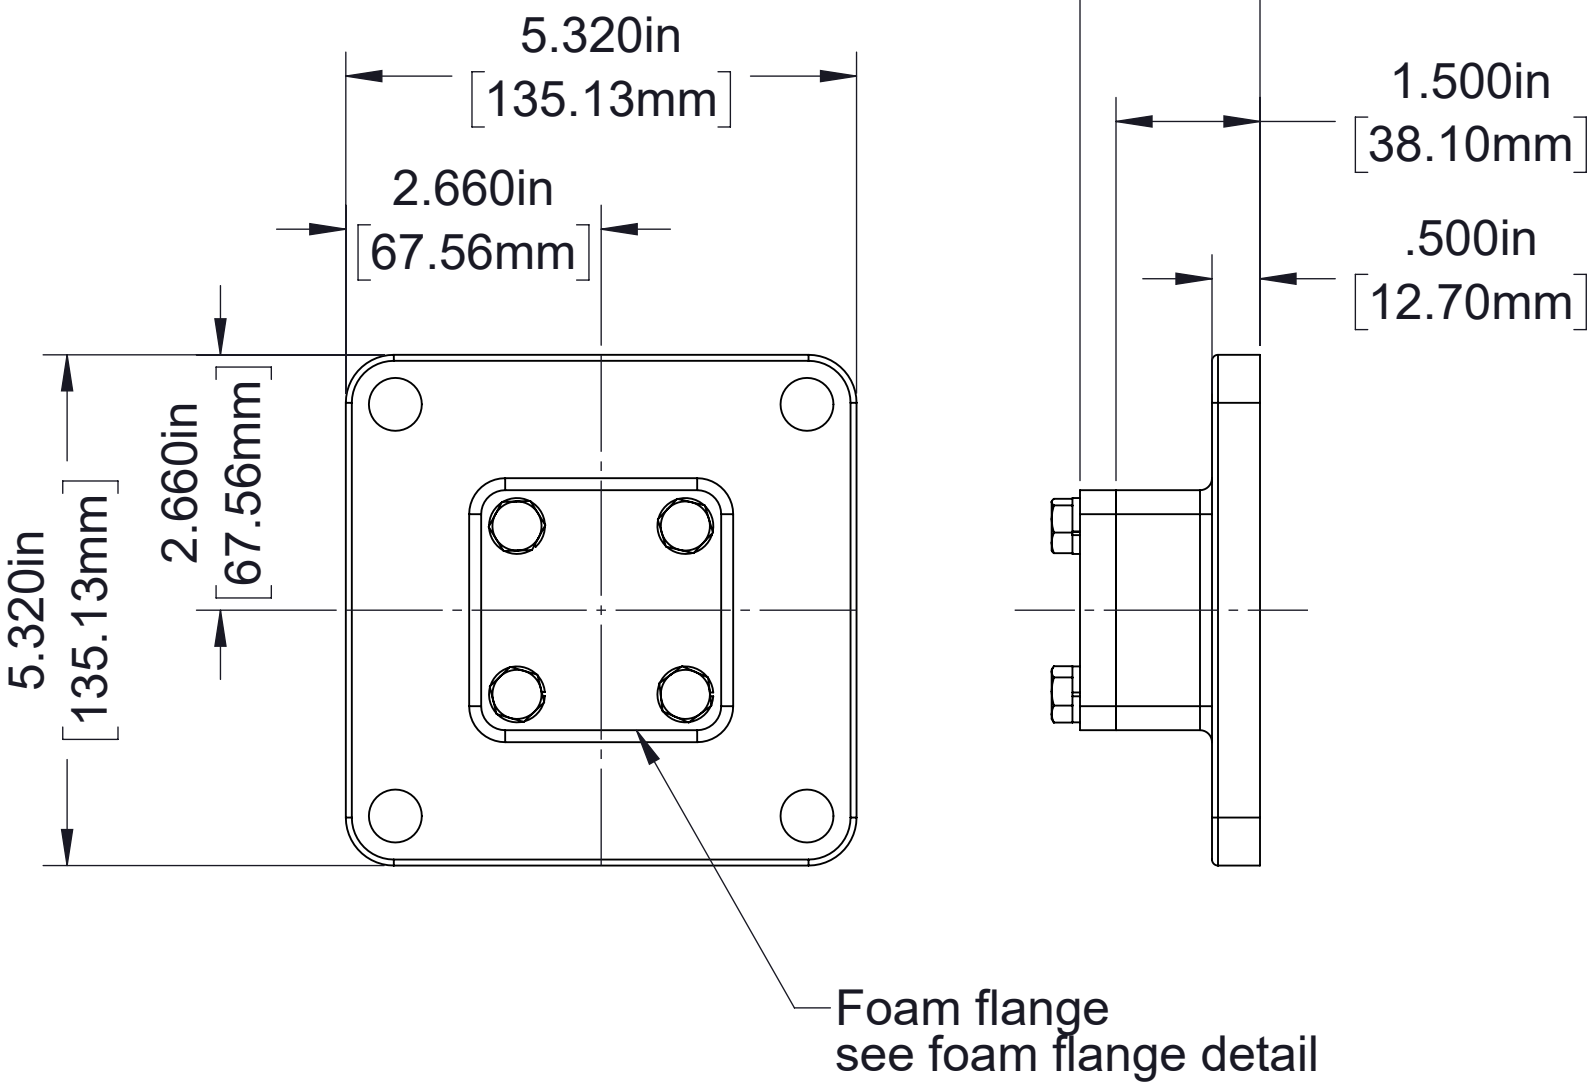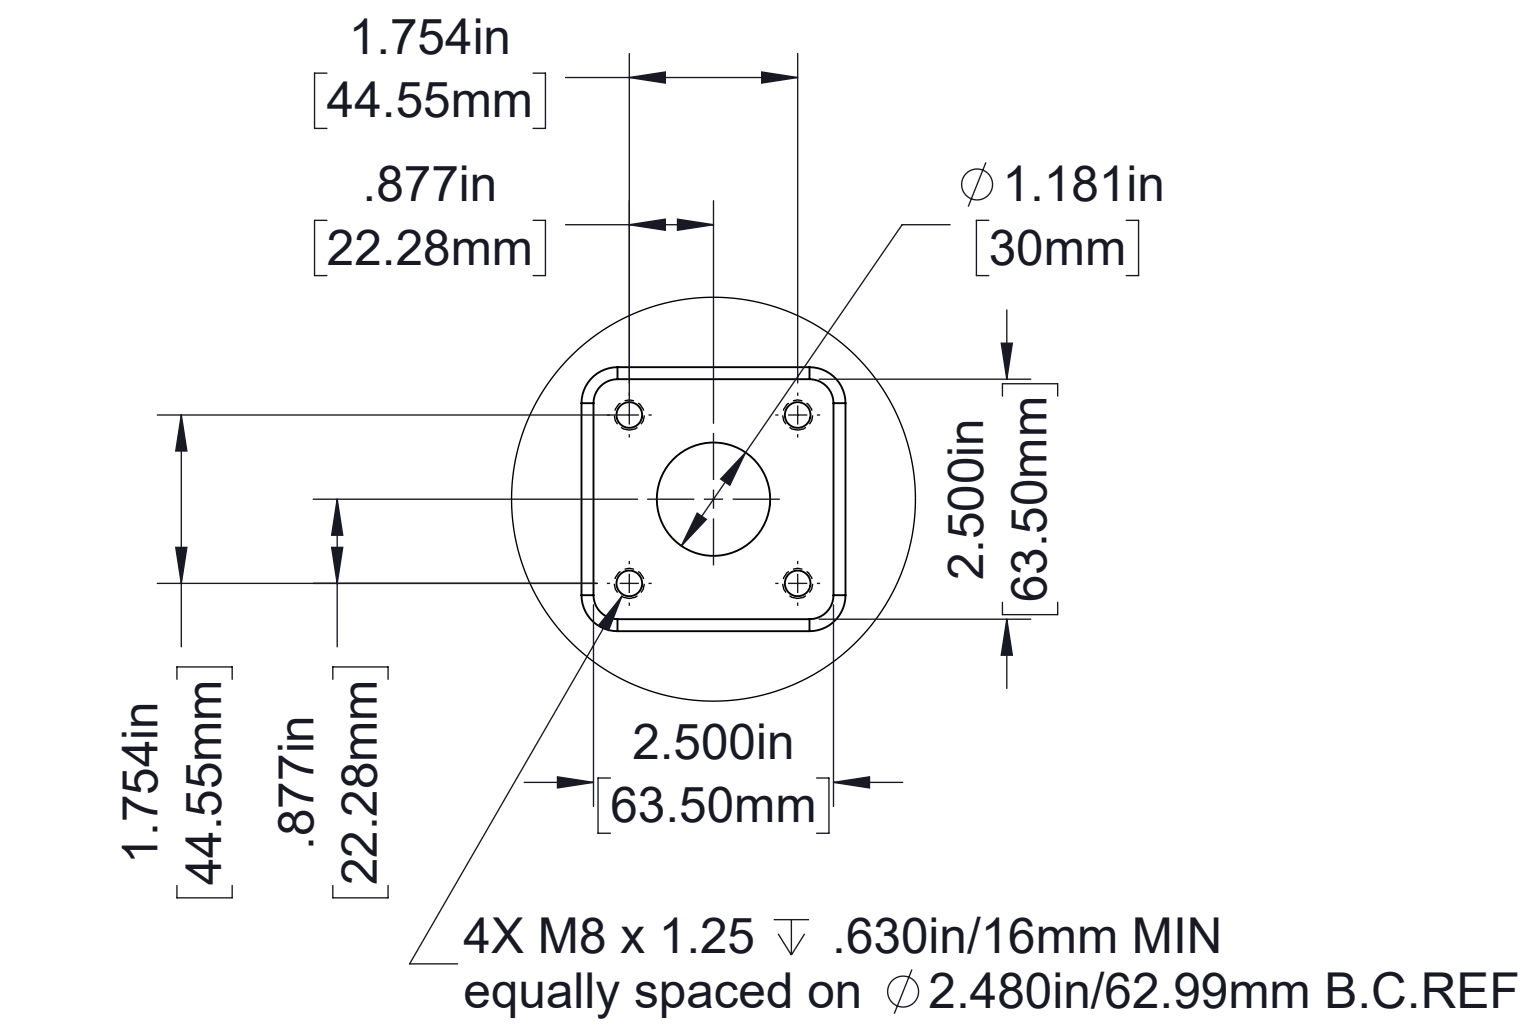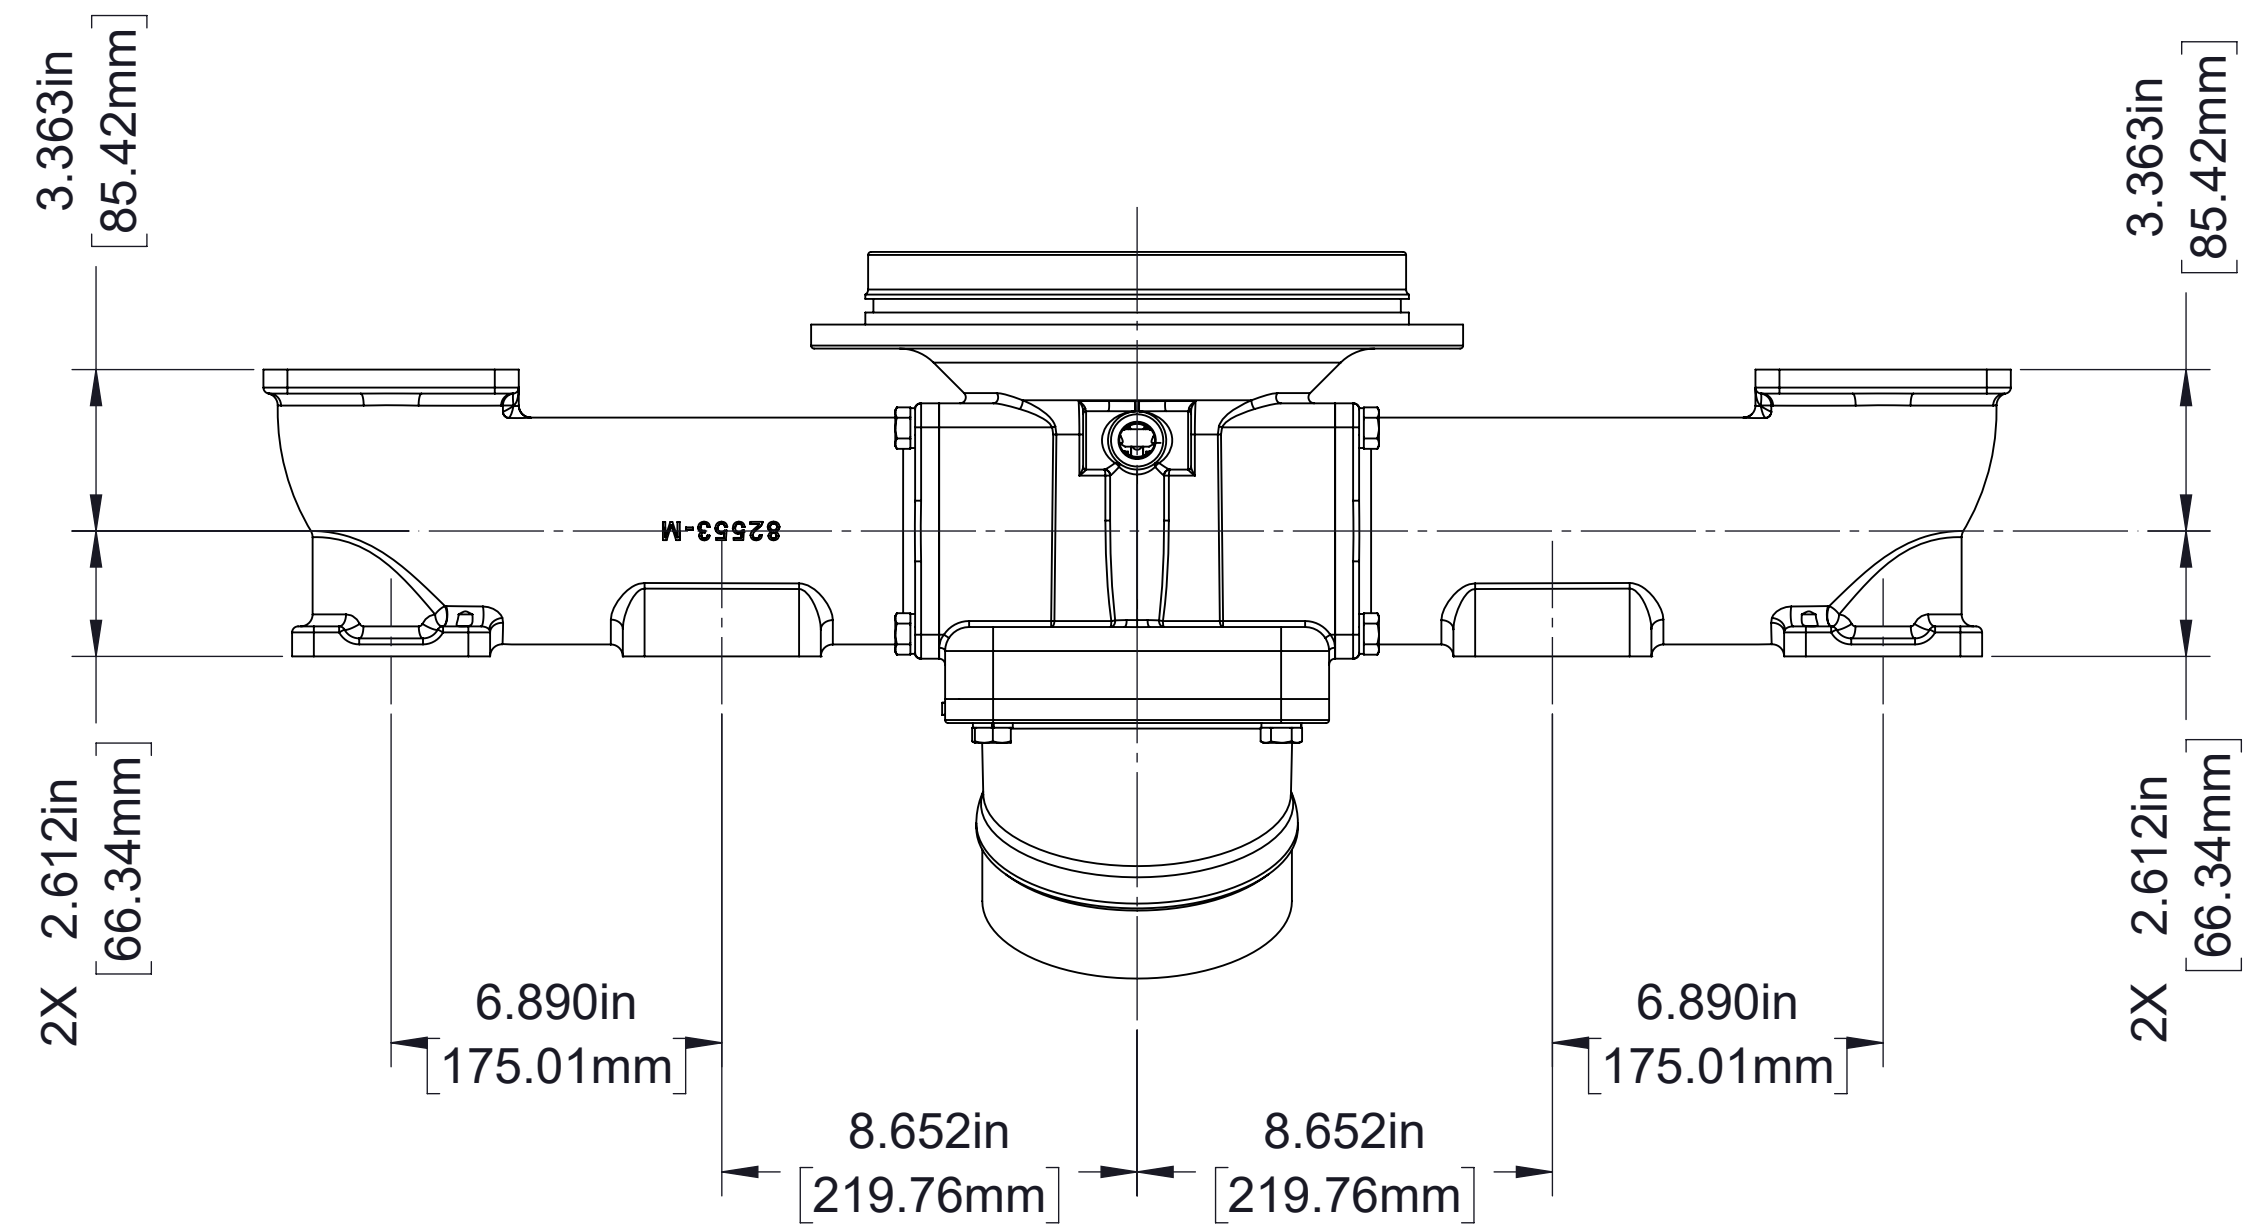
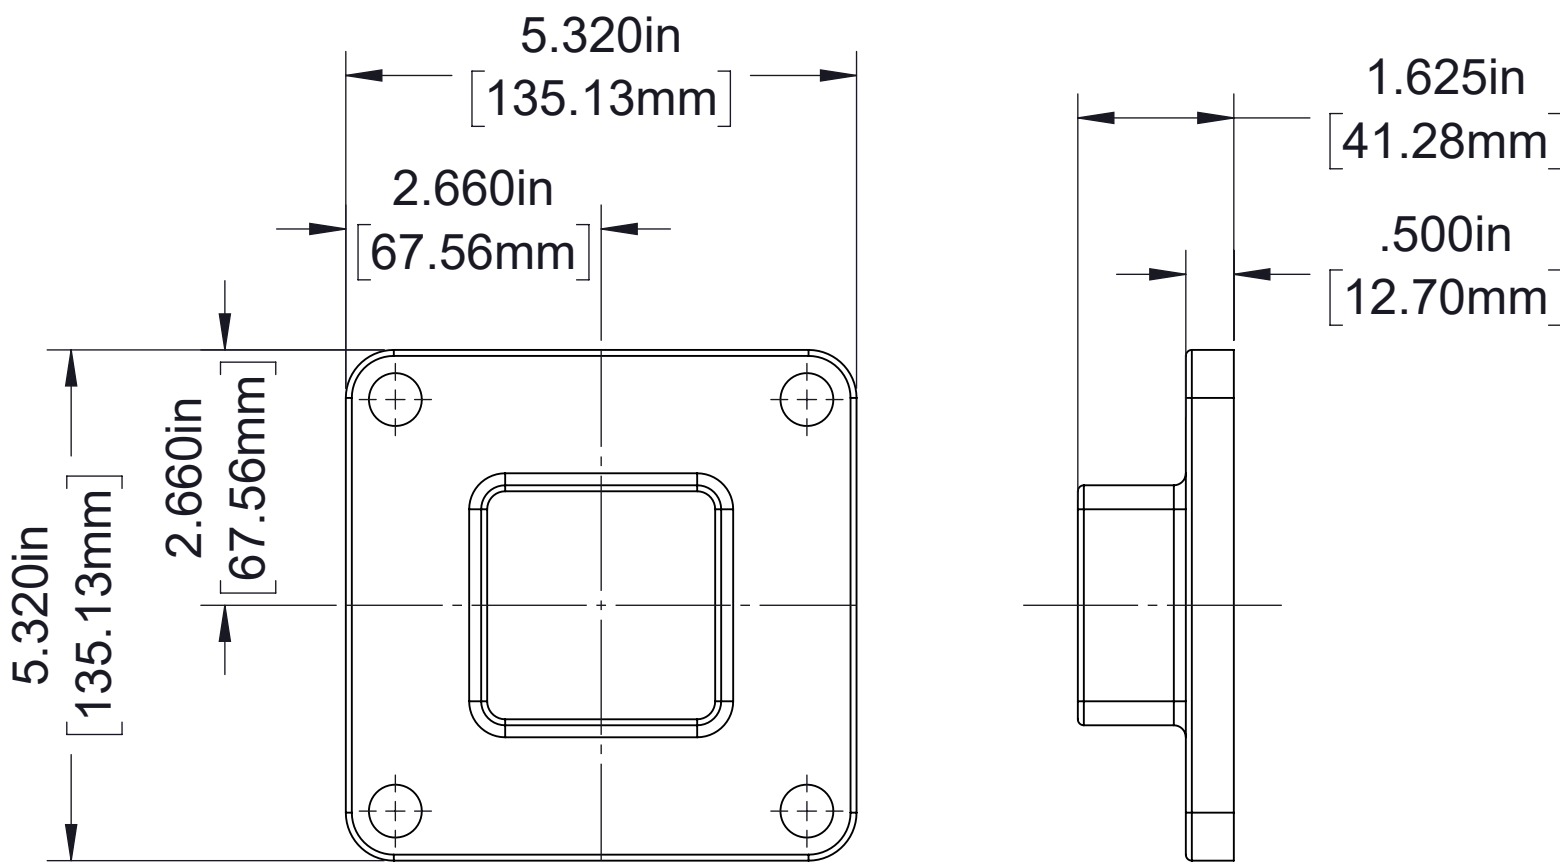
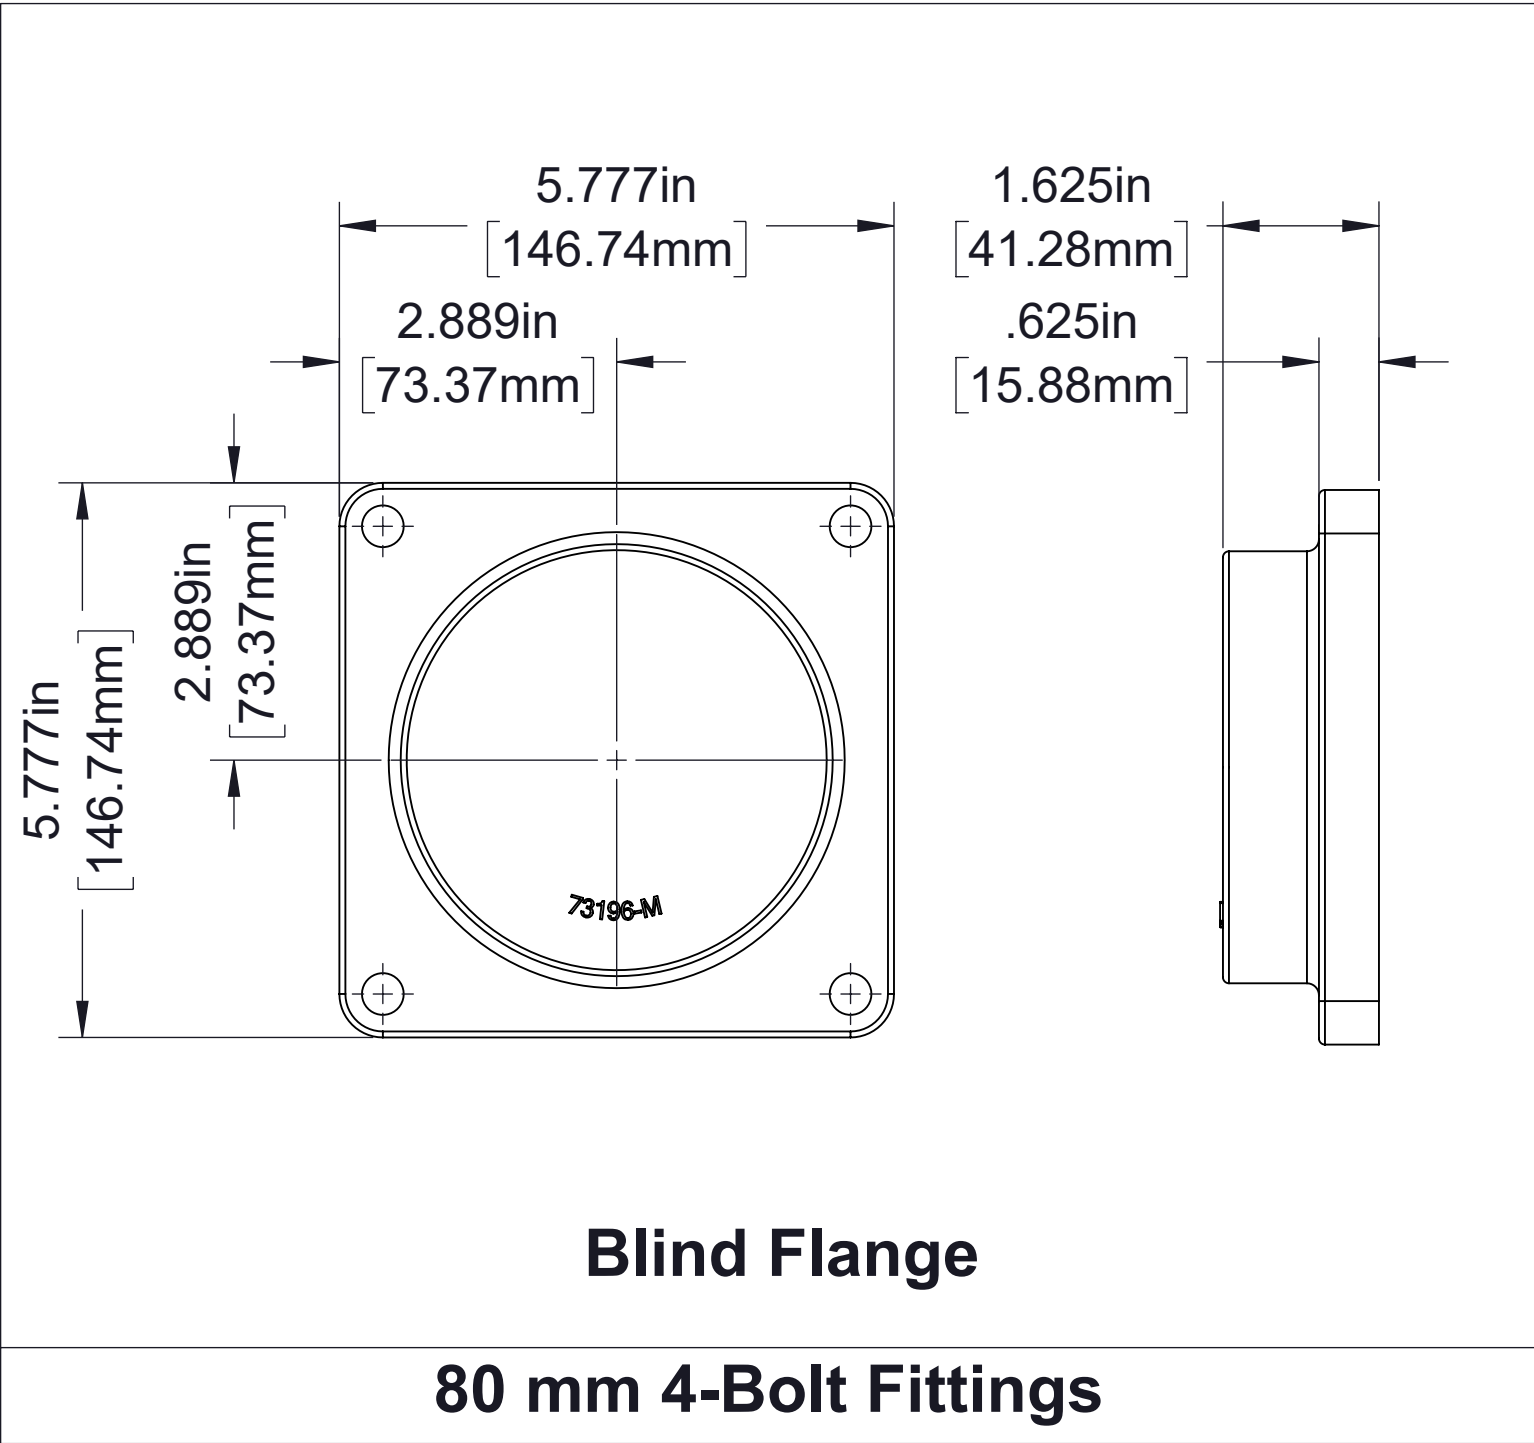


Optional Intake Manifold

(For pad details, see detail A on page 8 and detail B on page 10)



Foam Flange with Blind Foam Pad

**101 mm 4-Bolt
Auxiliary Fittings**

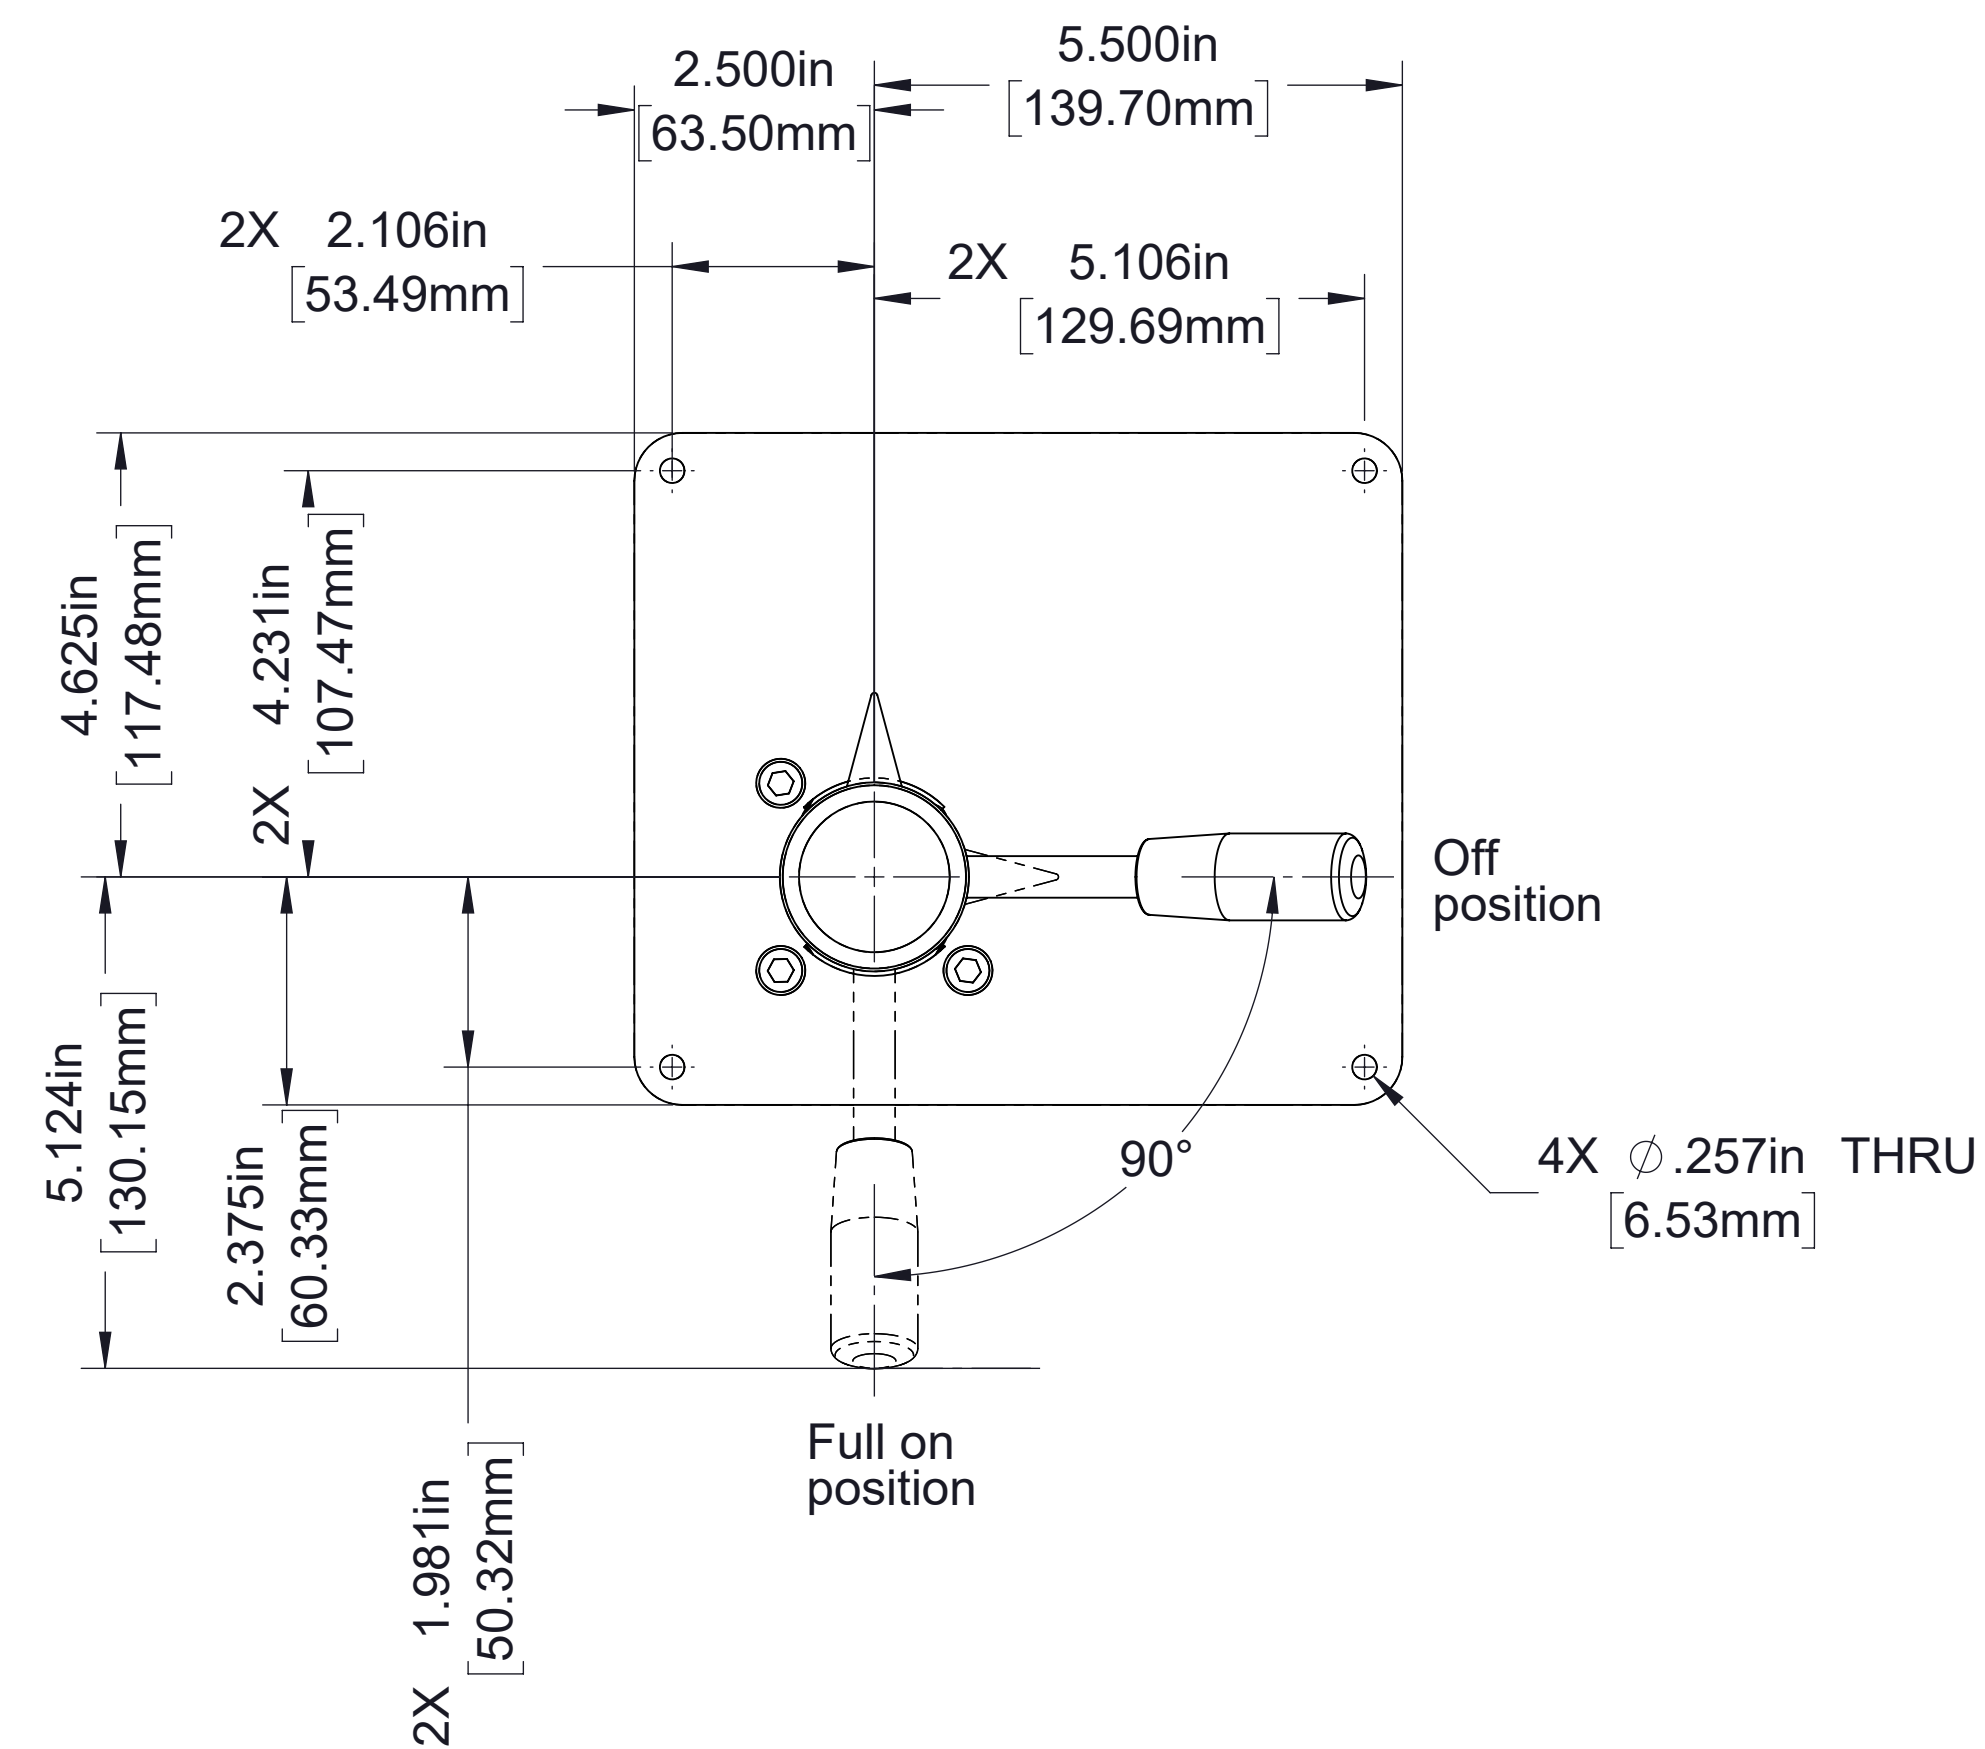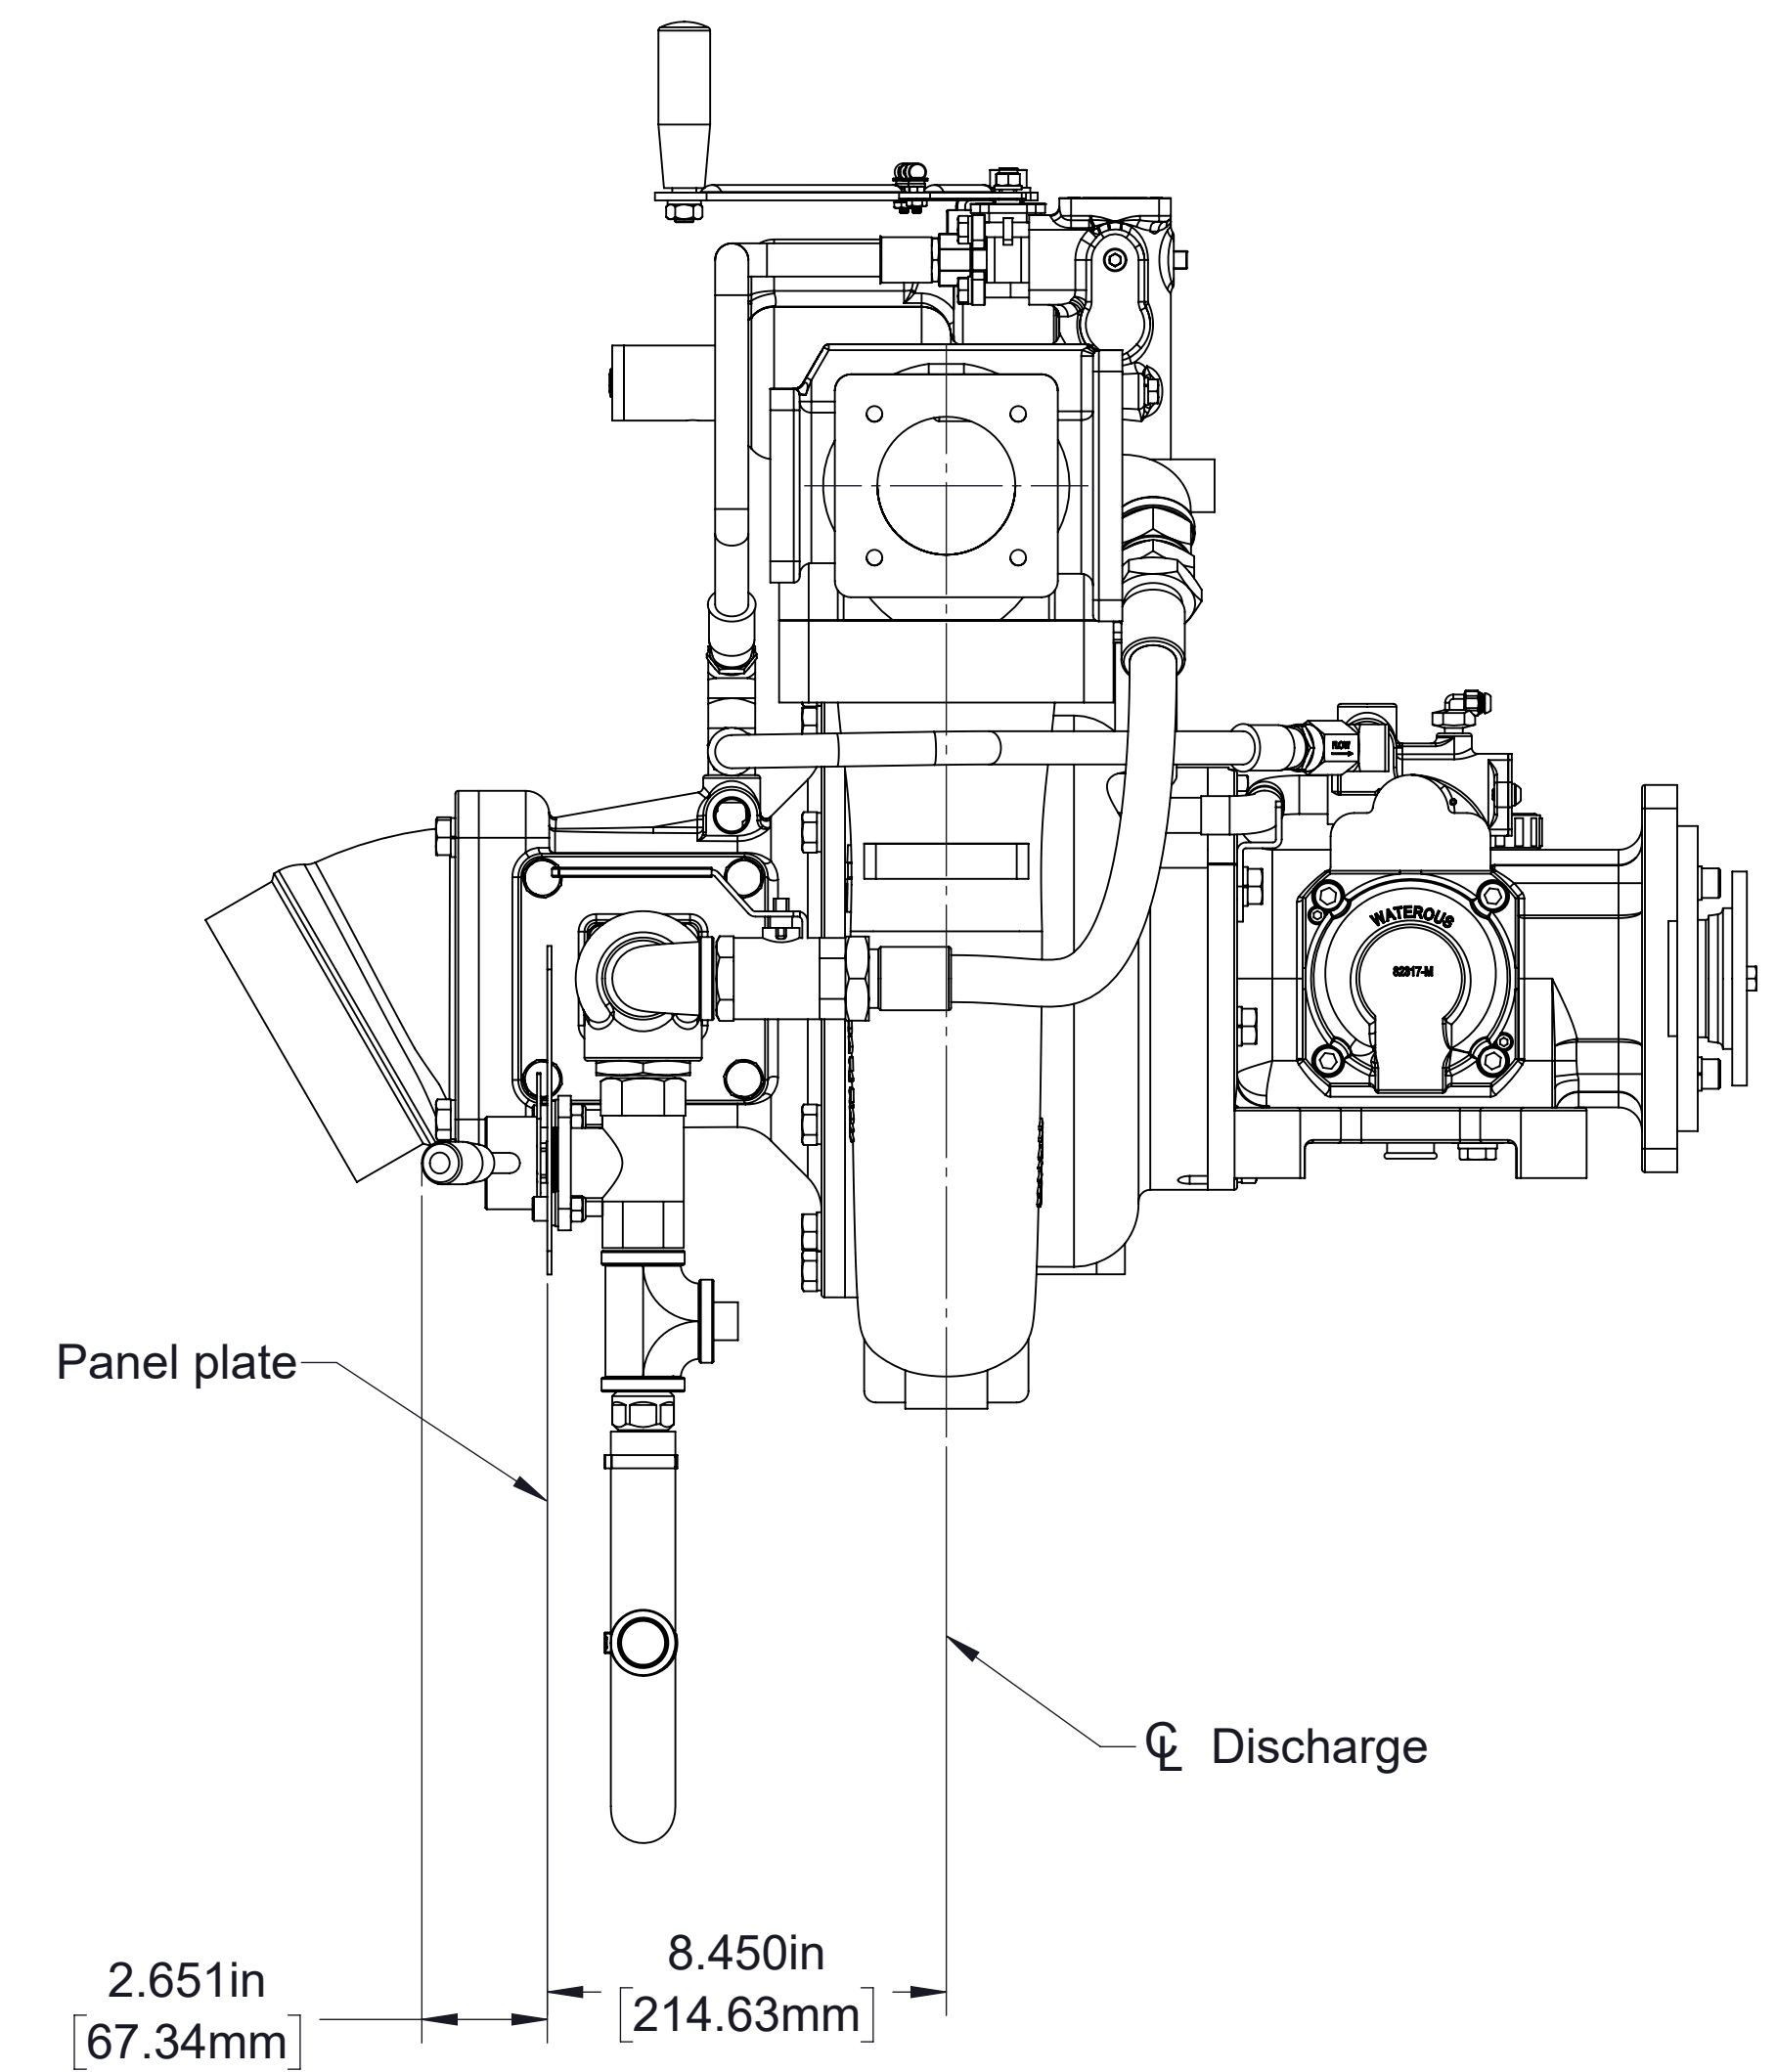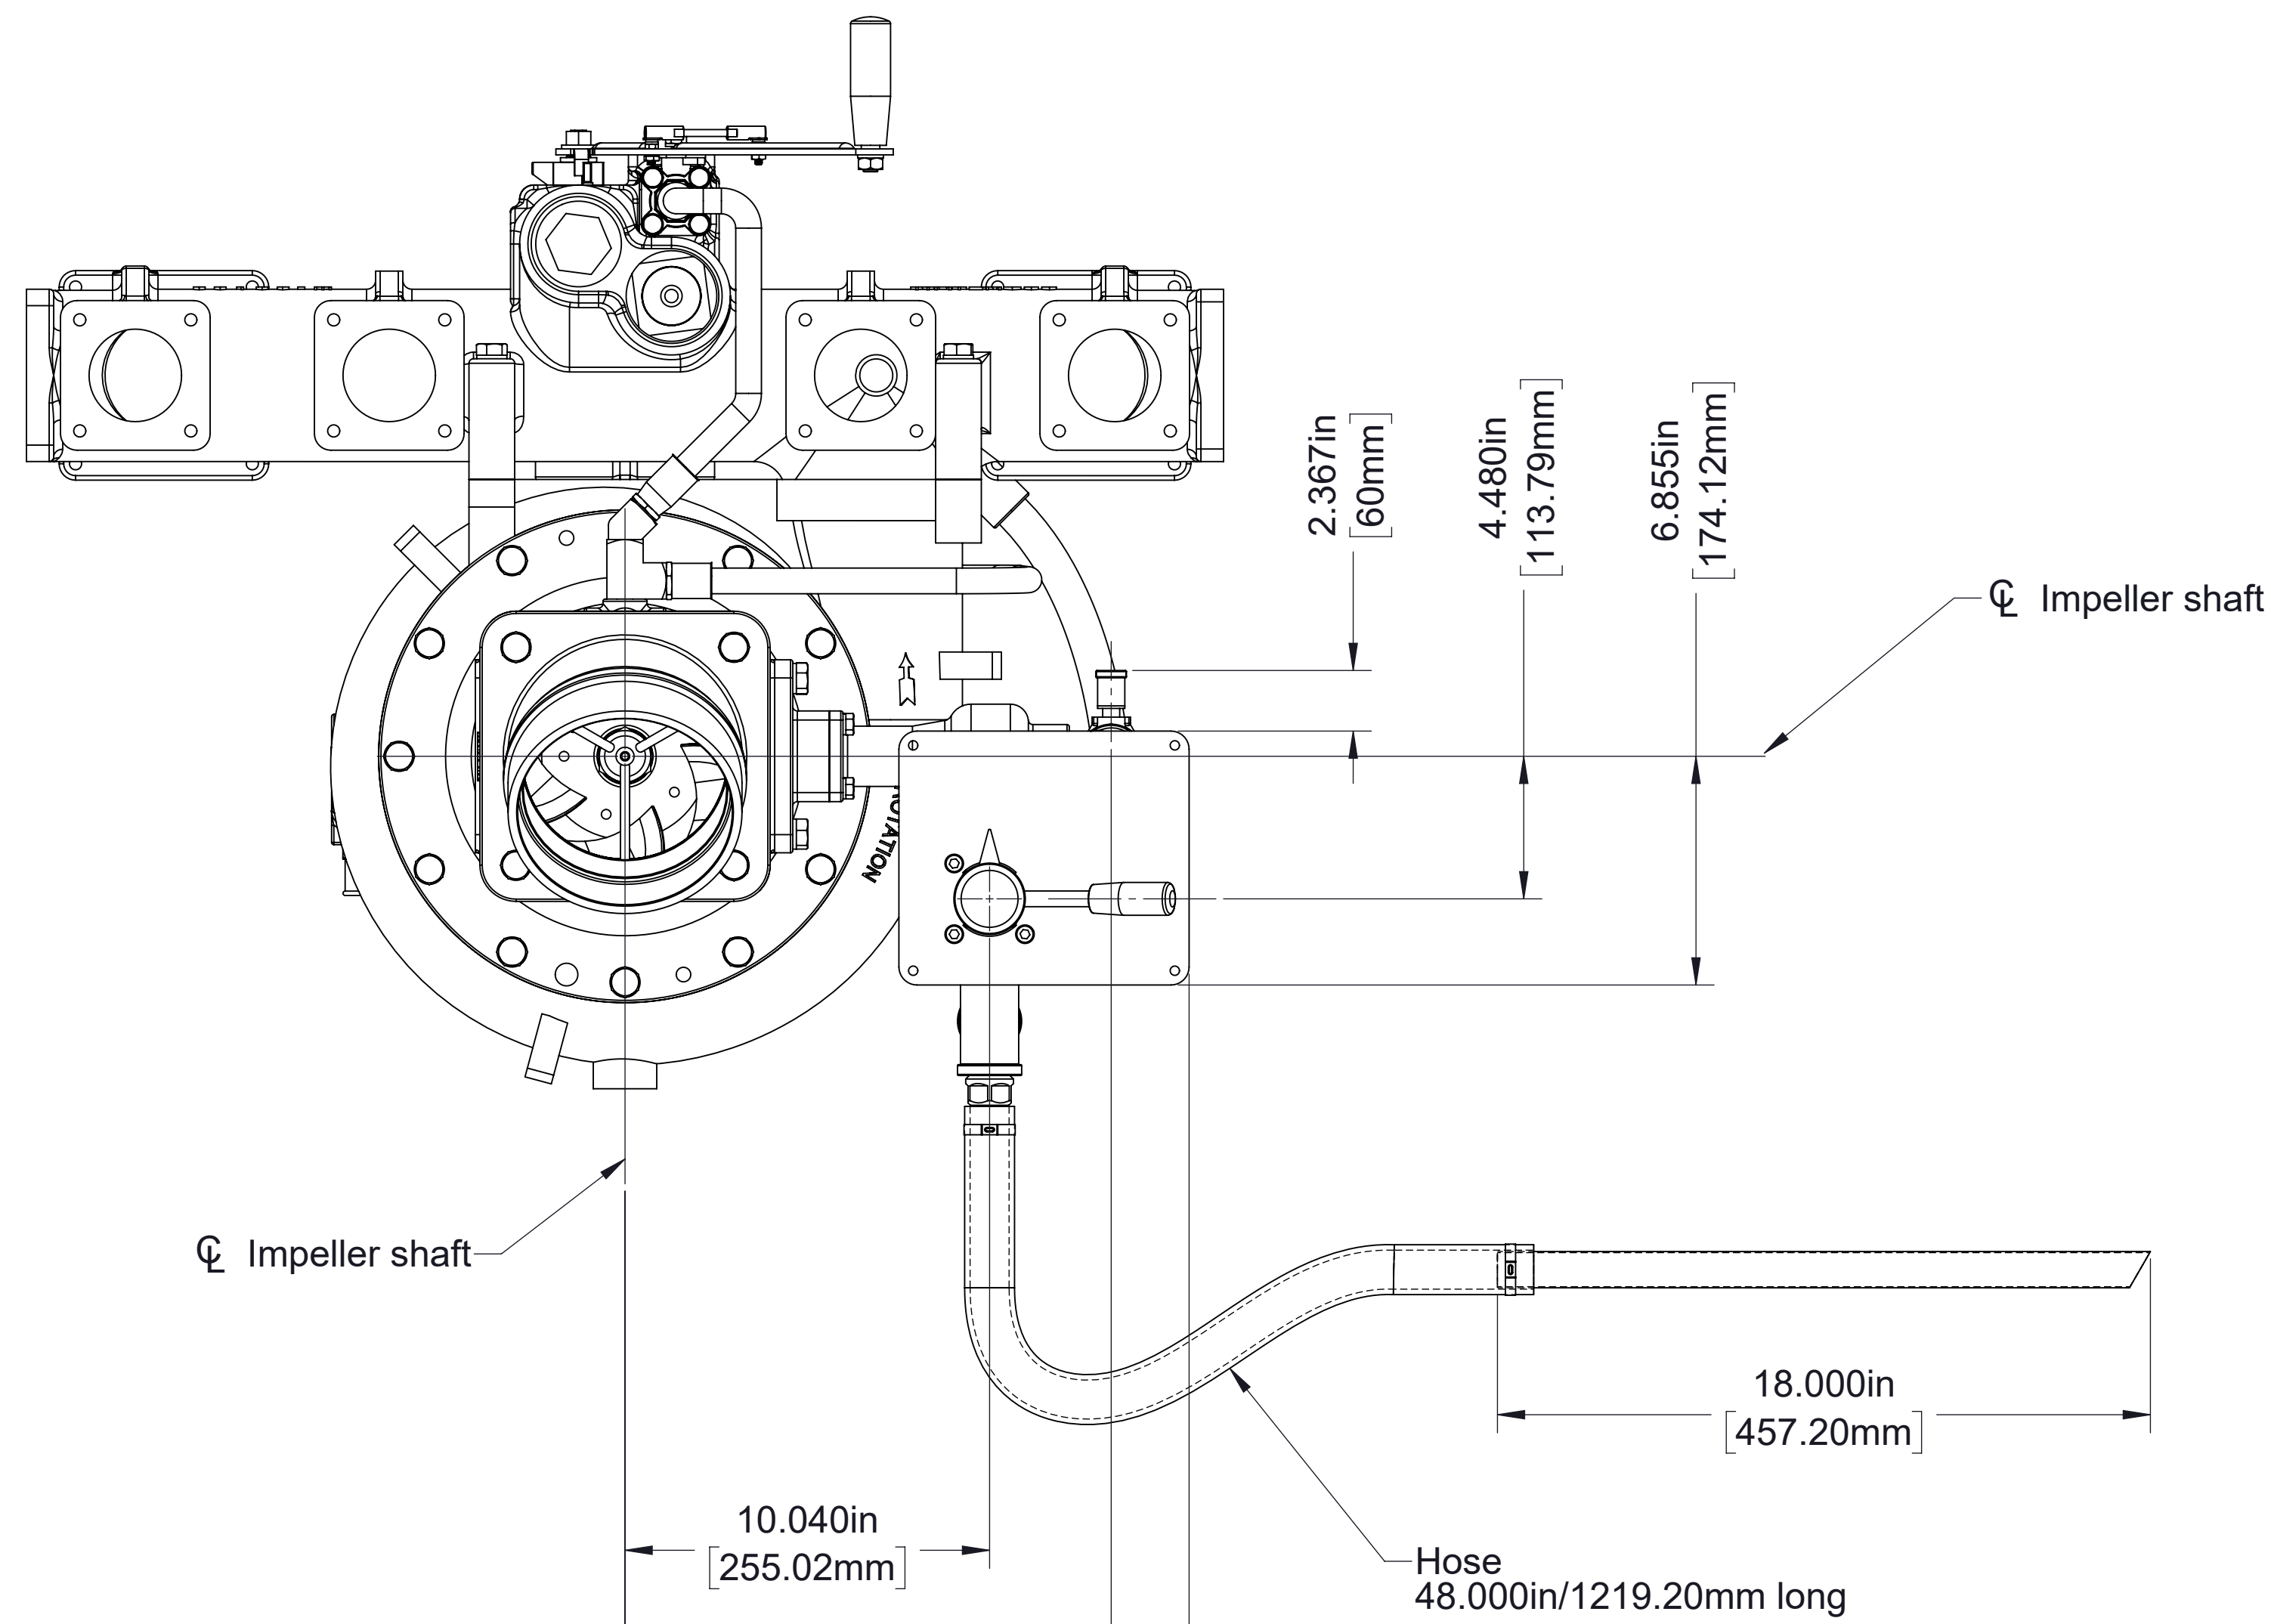


Optional RTP Foam System
Mounted on pump at factory



Available Panel Configurations

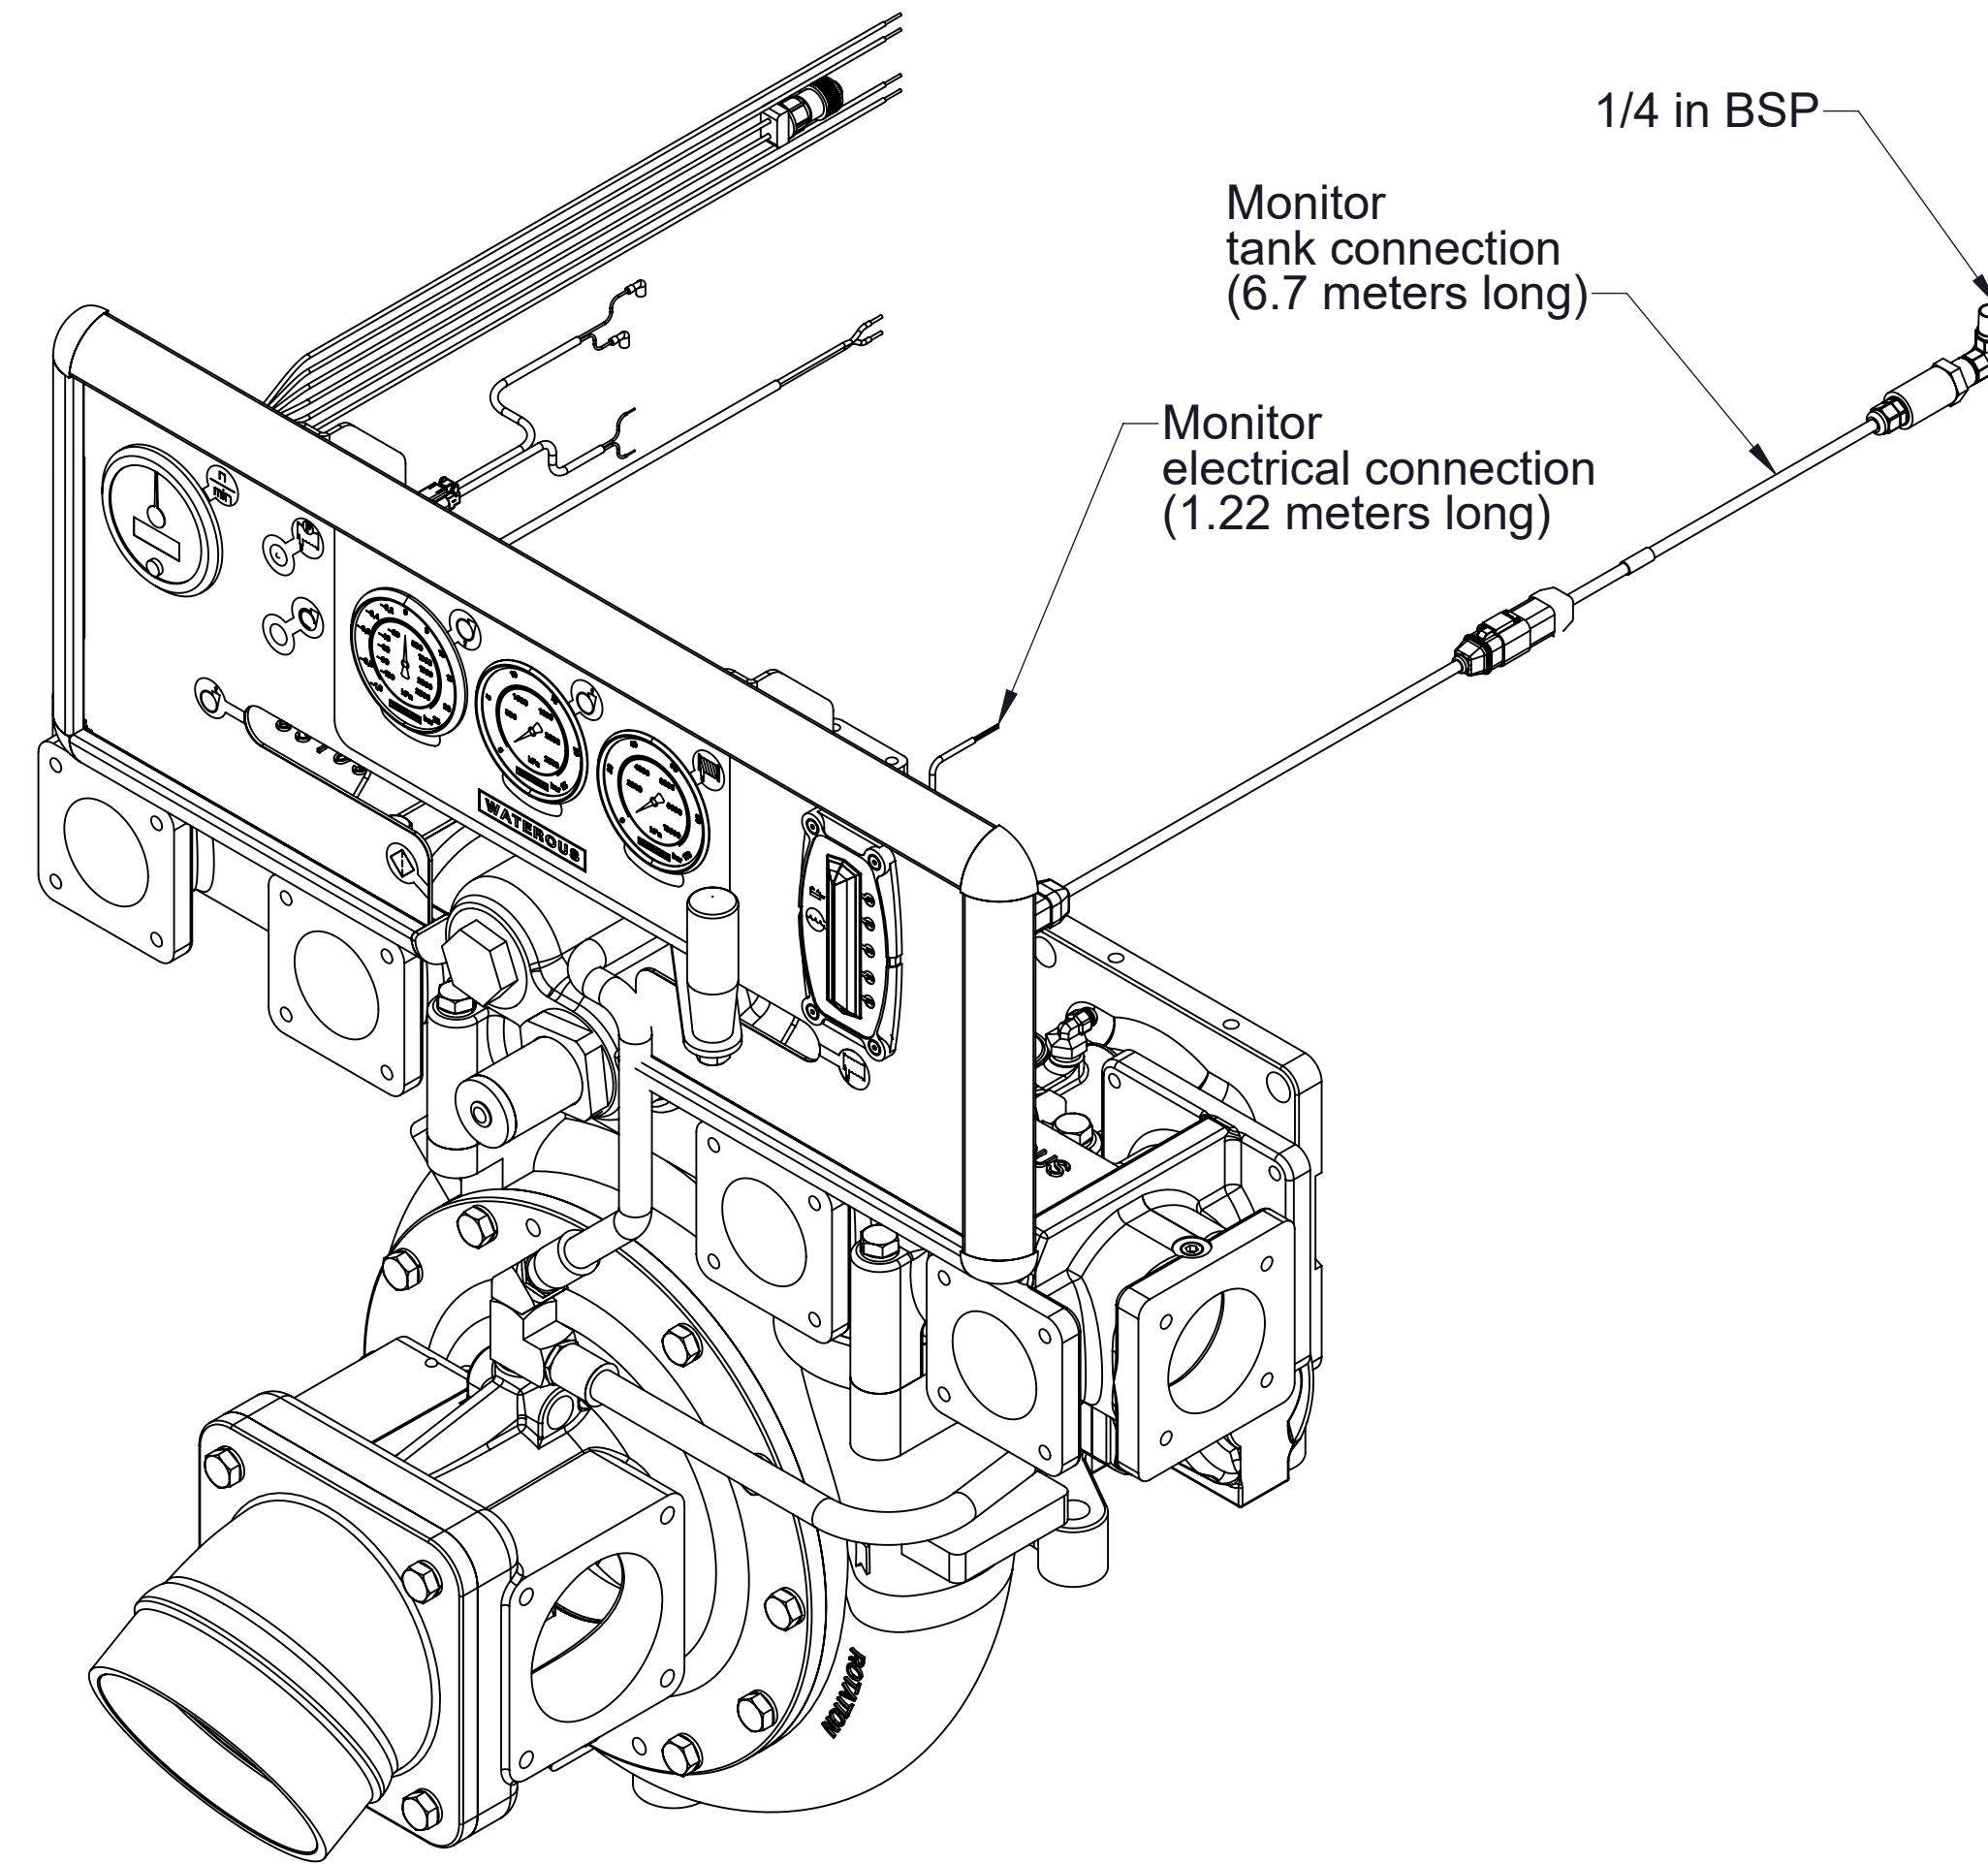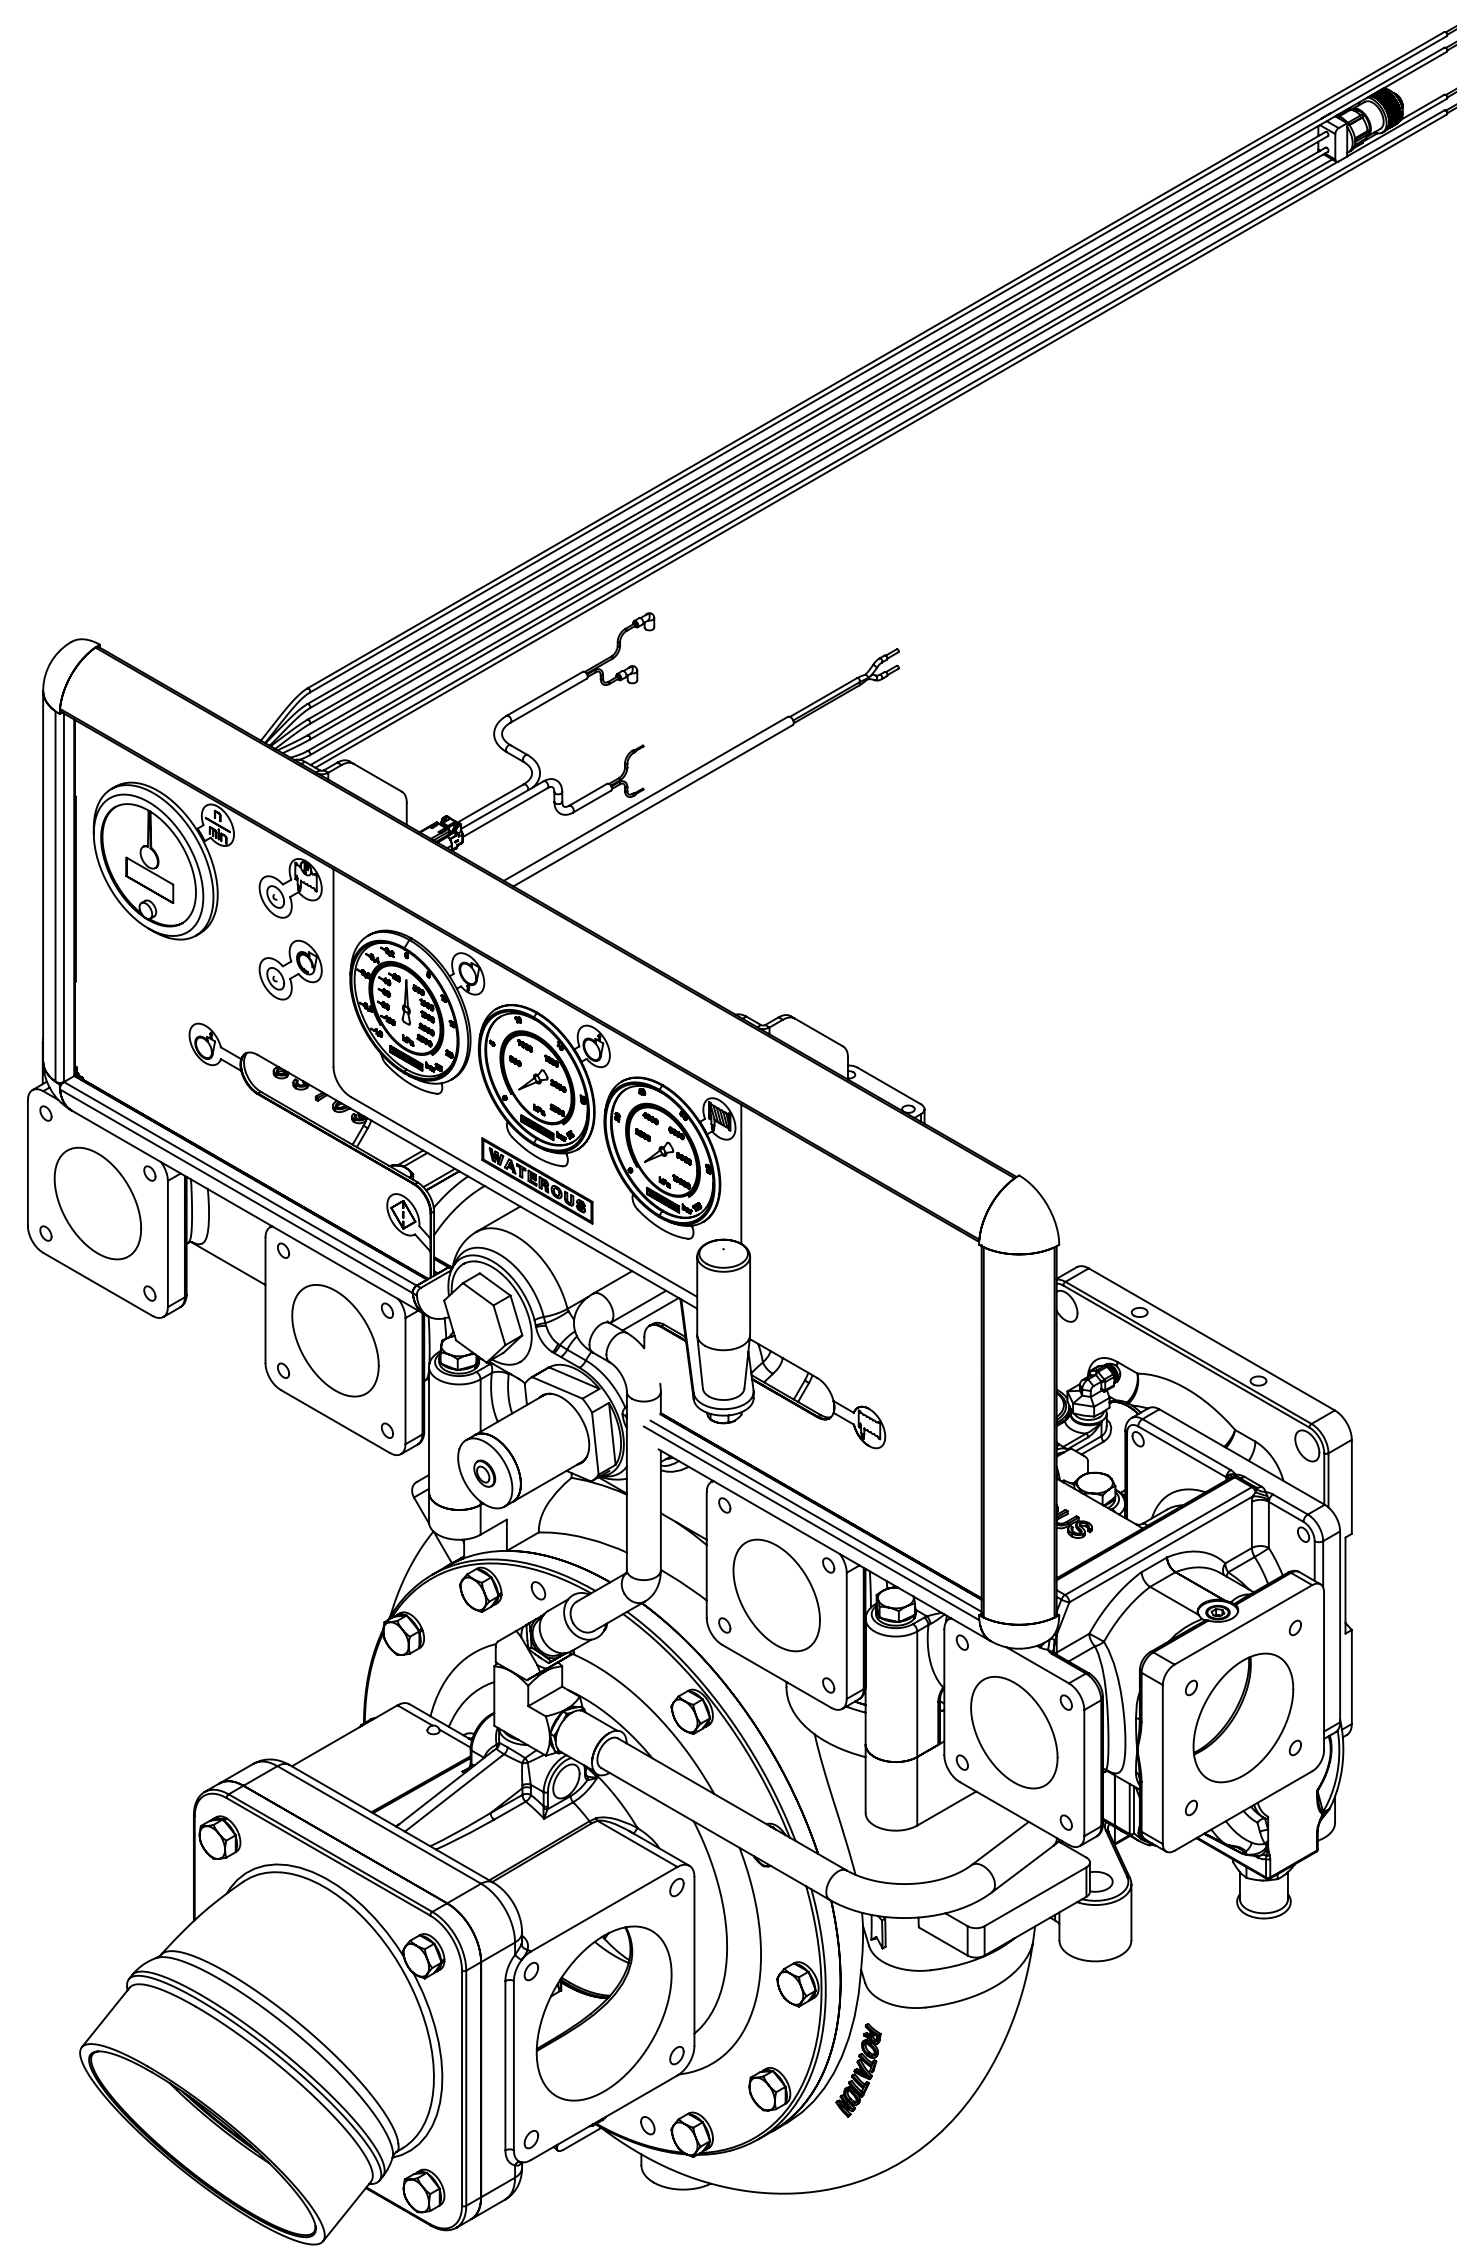


With Water Tank Level Monitor Only


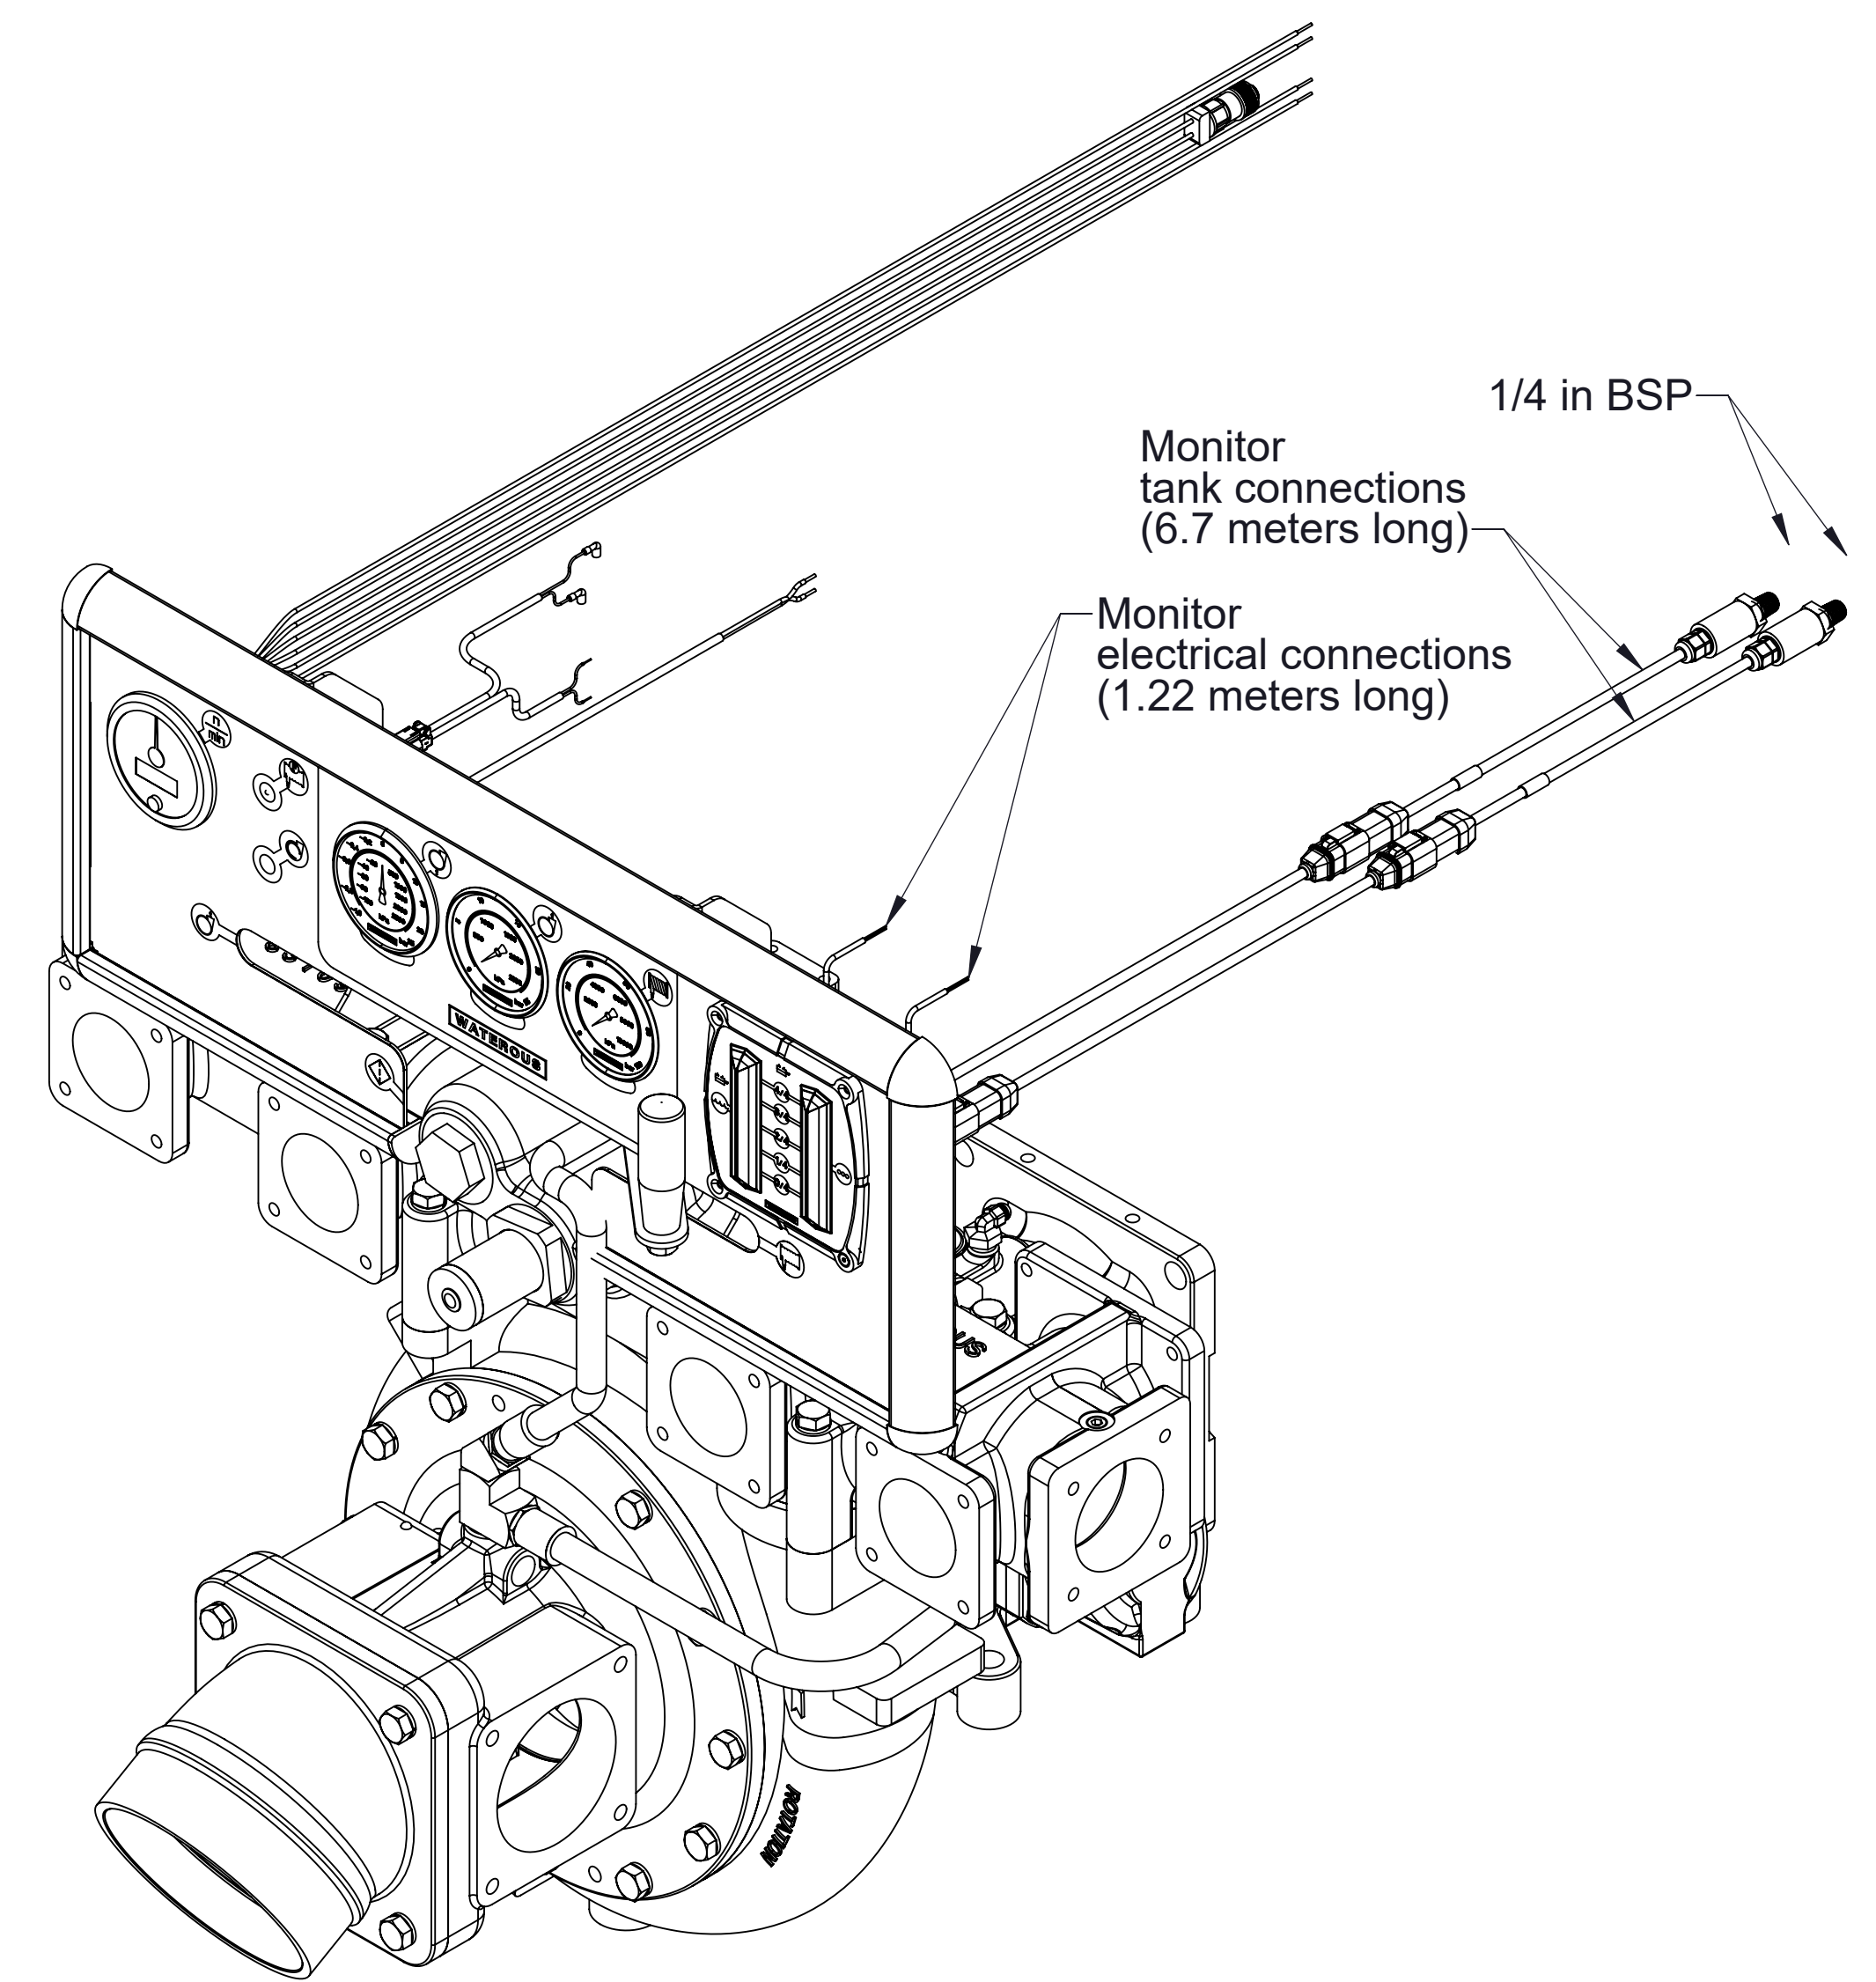


With Water Tank and Foam Tank Level Monitors

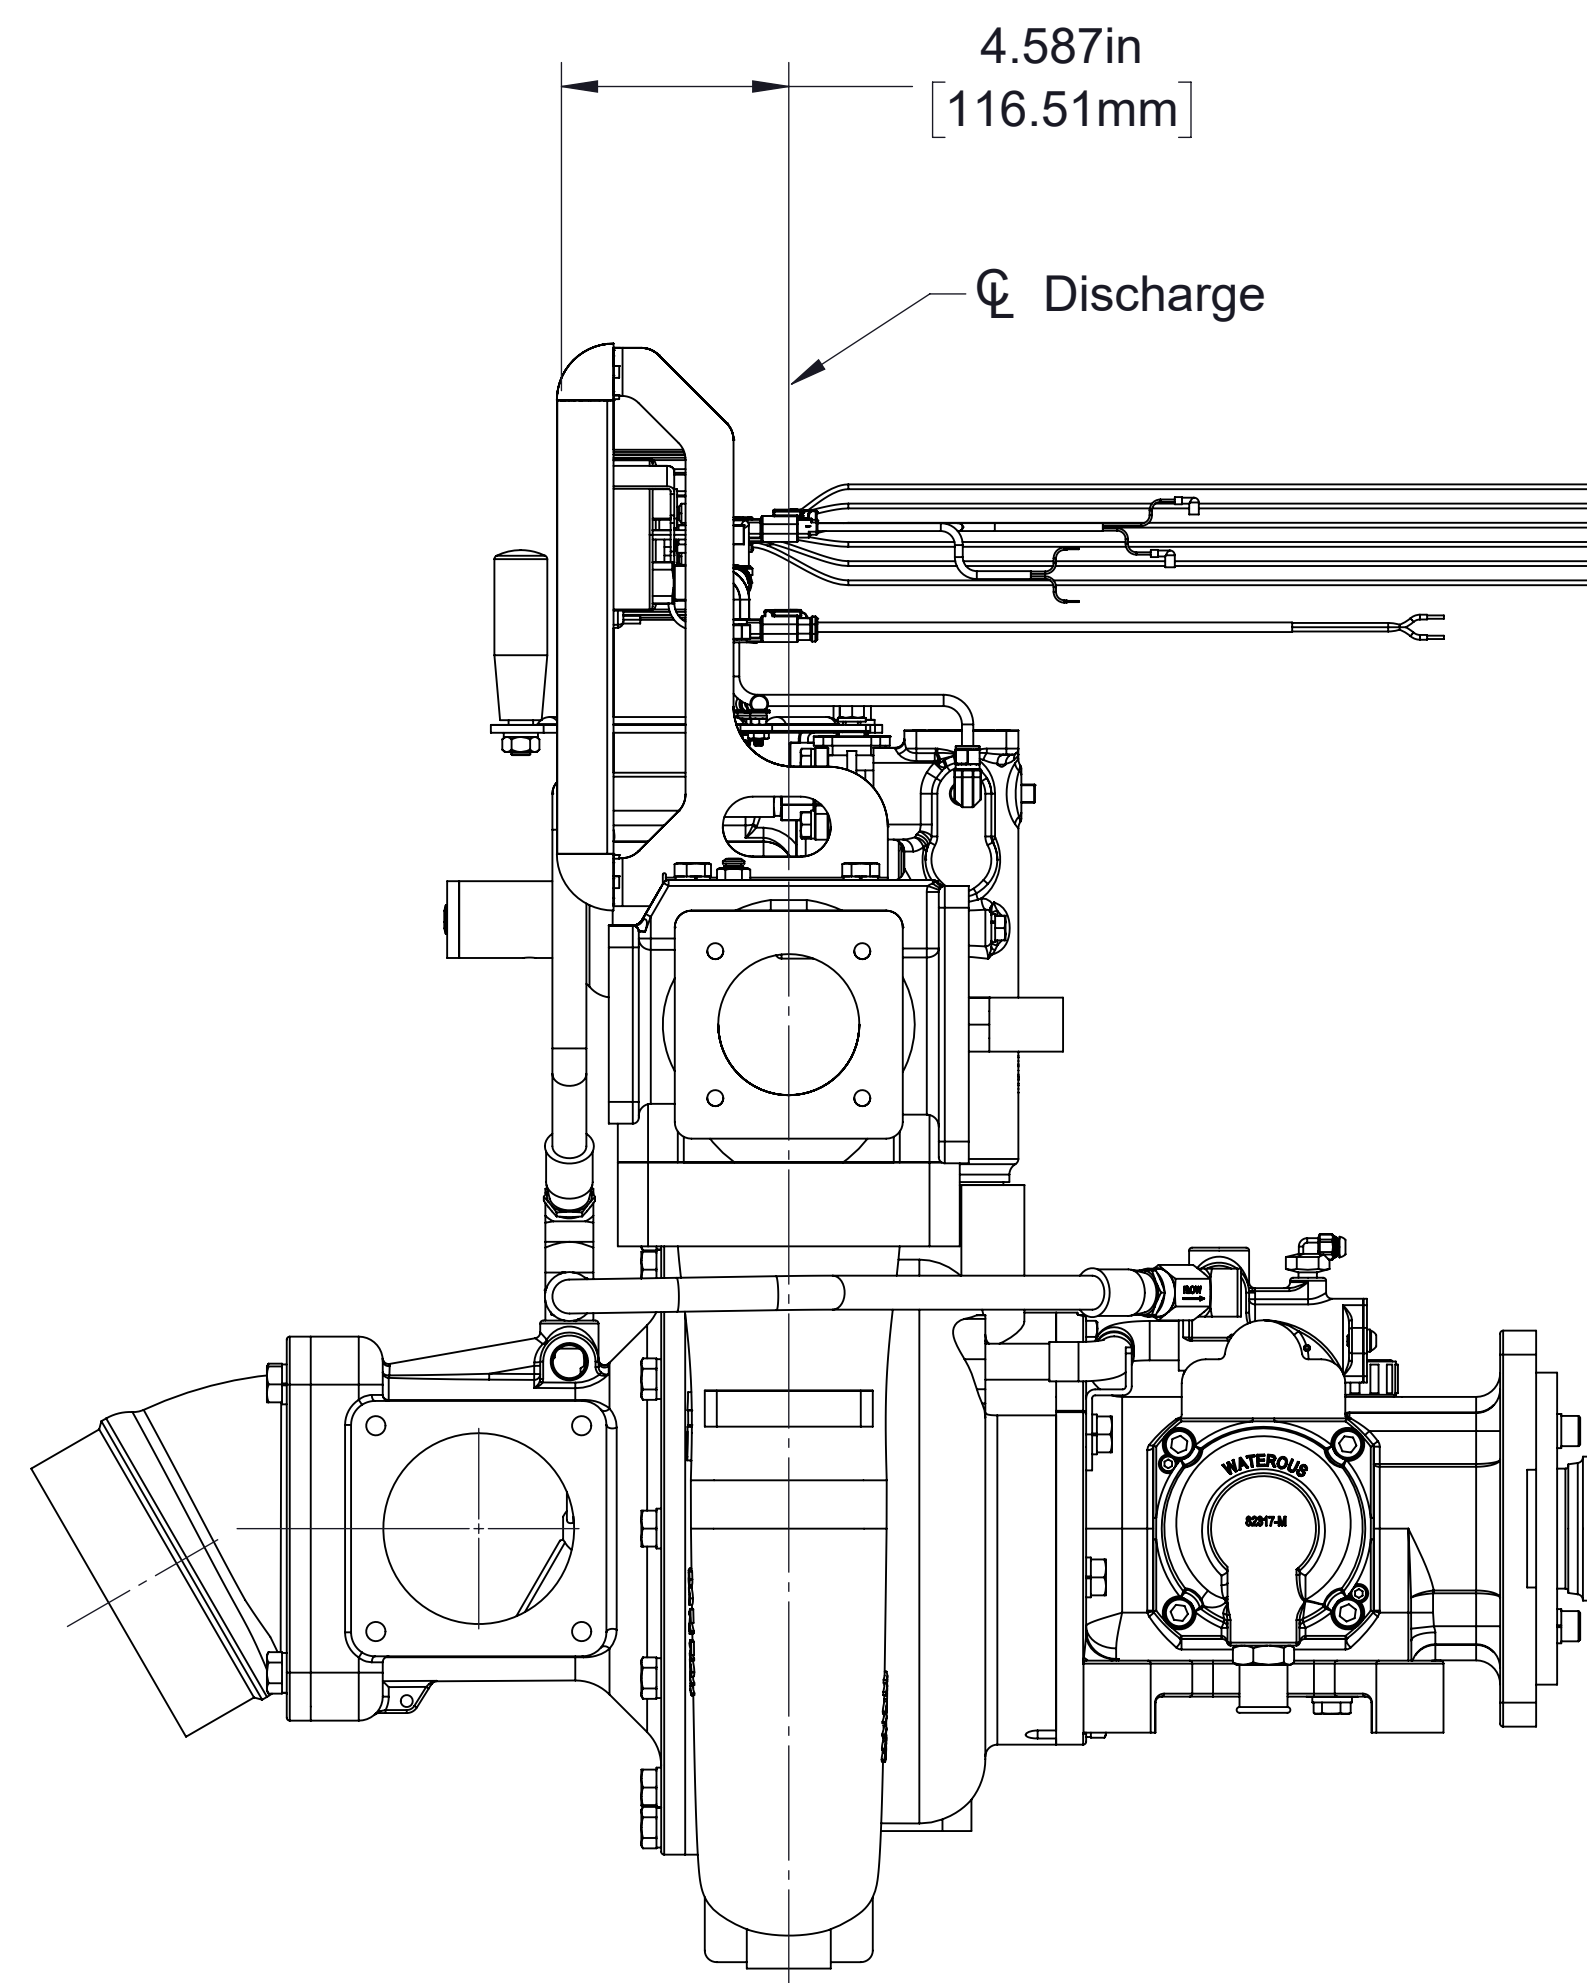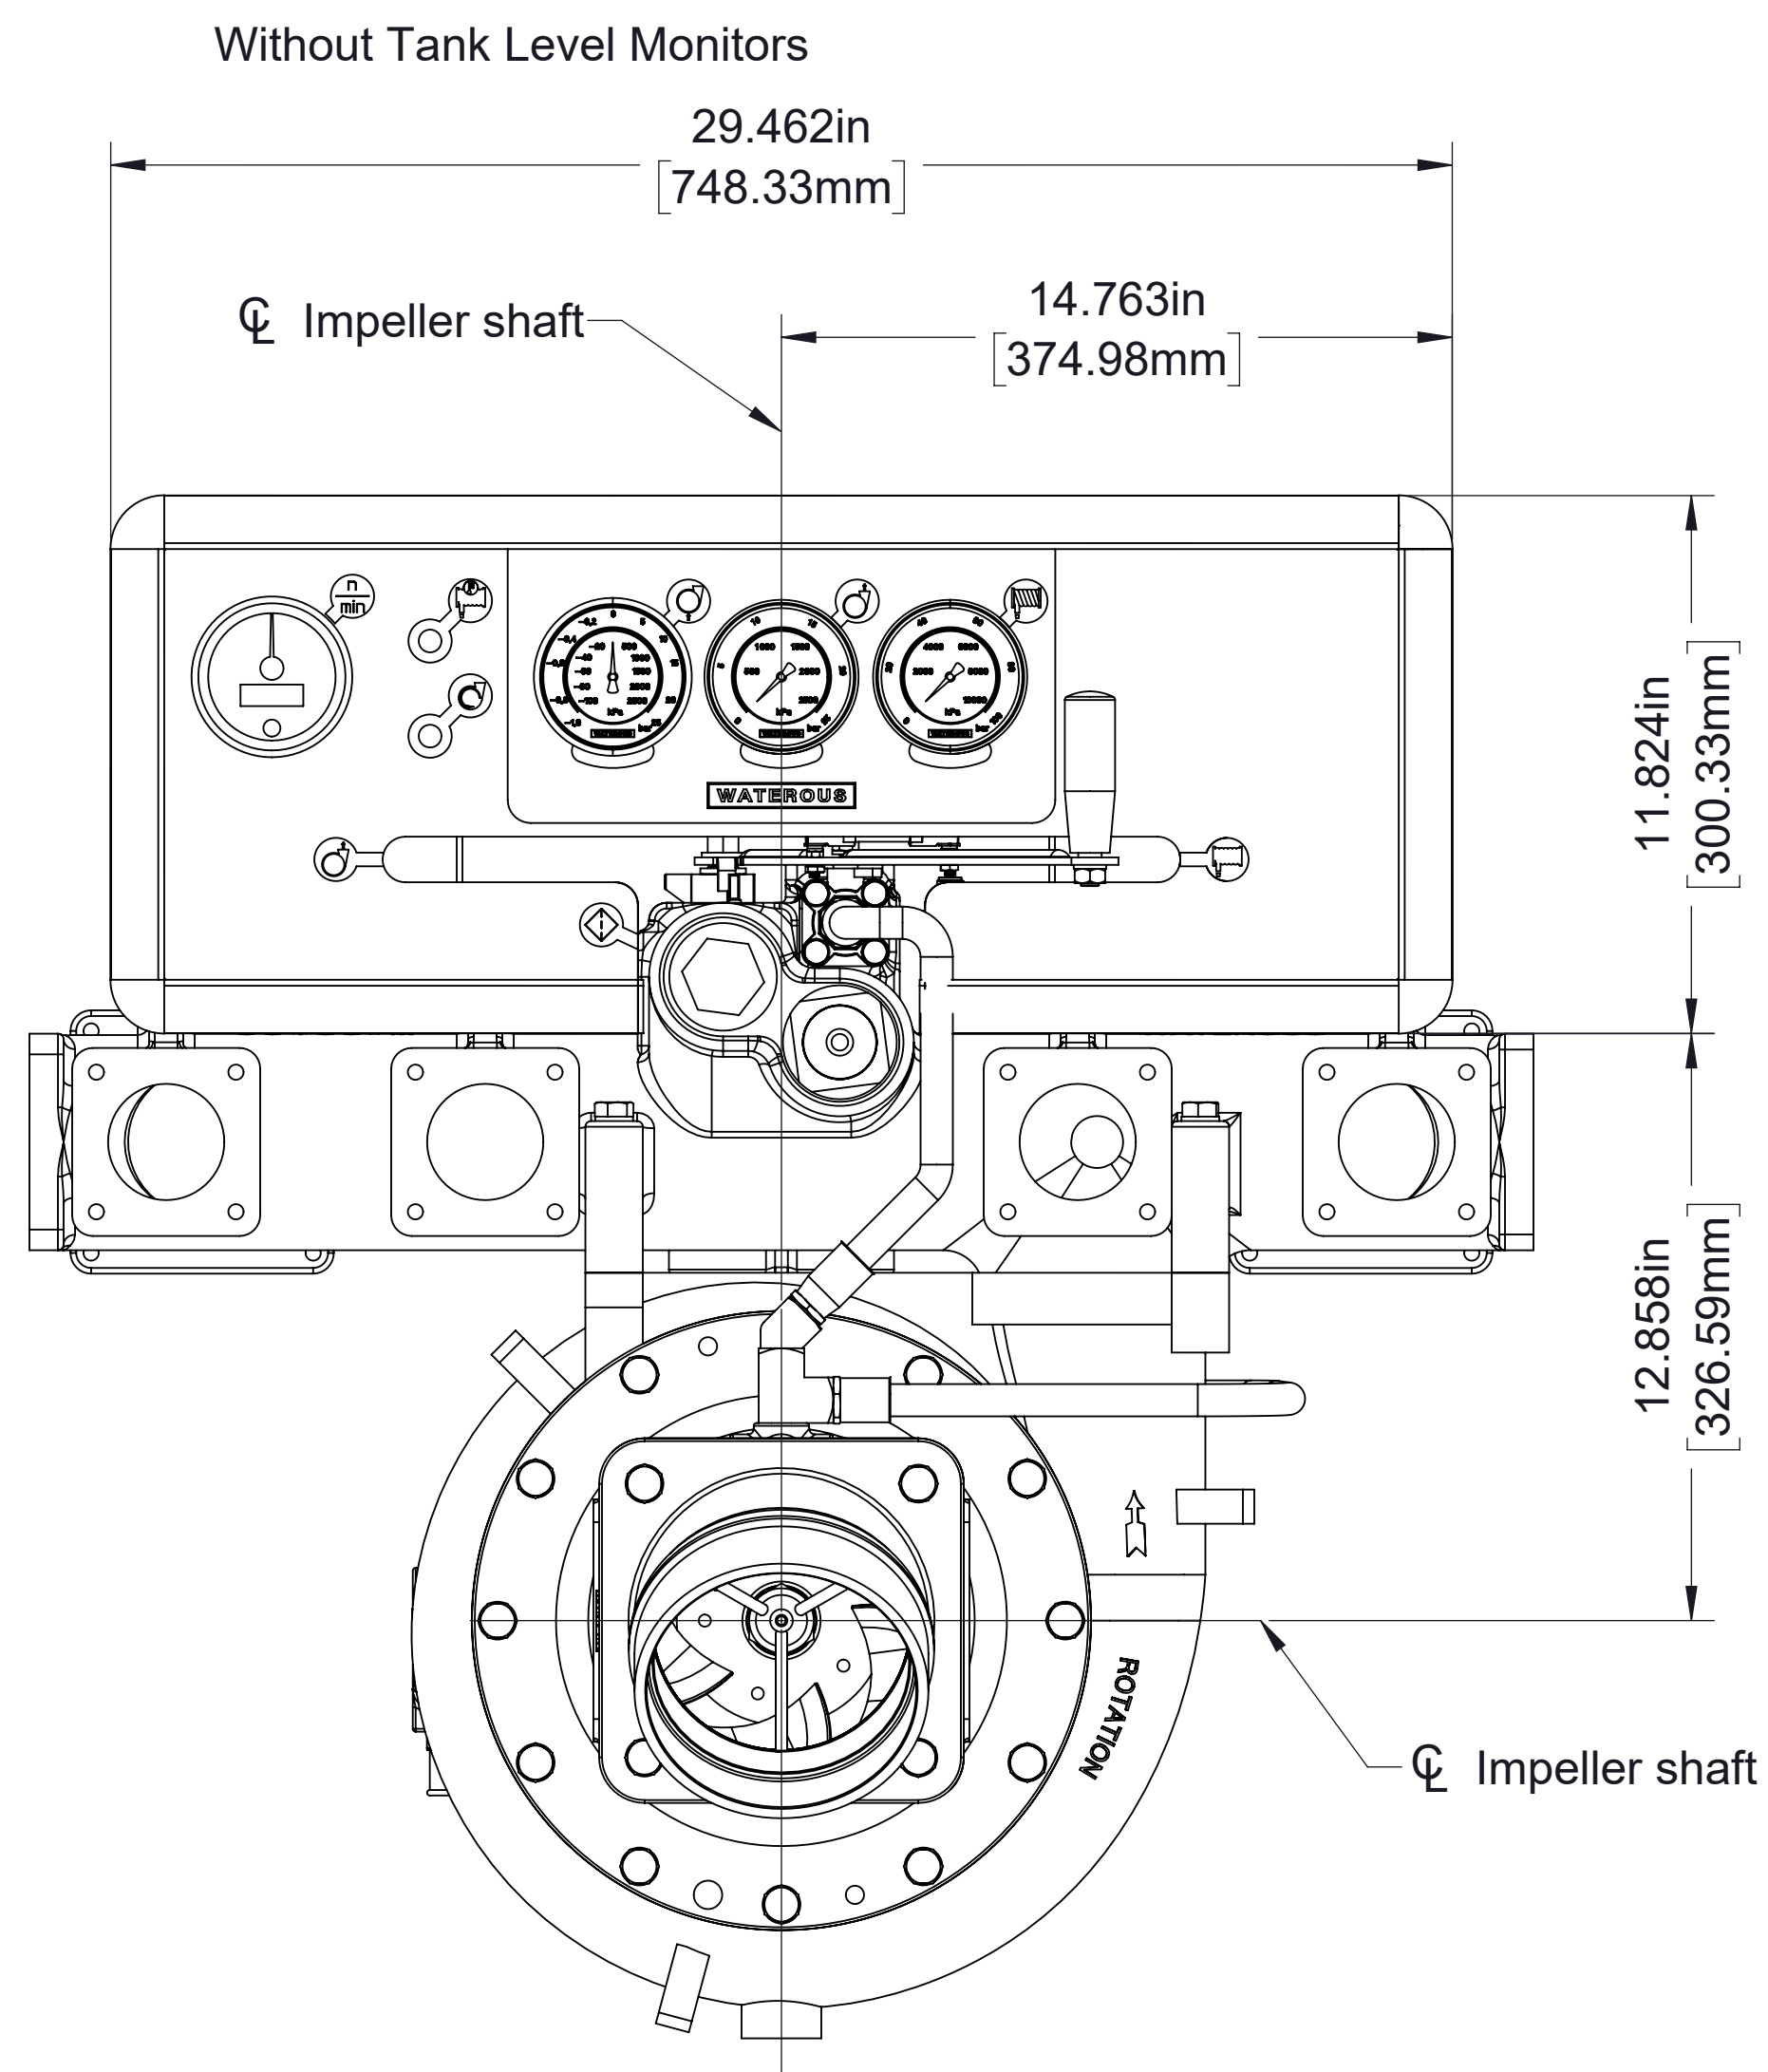


Optional Control Panels

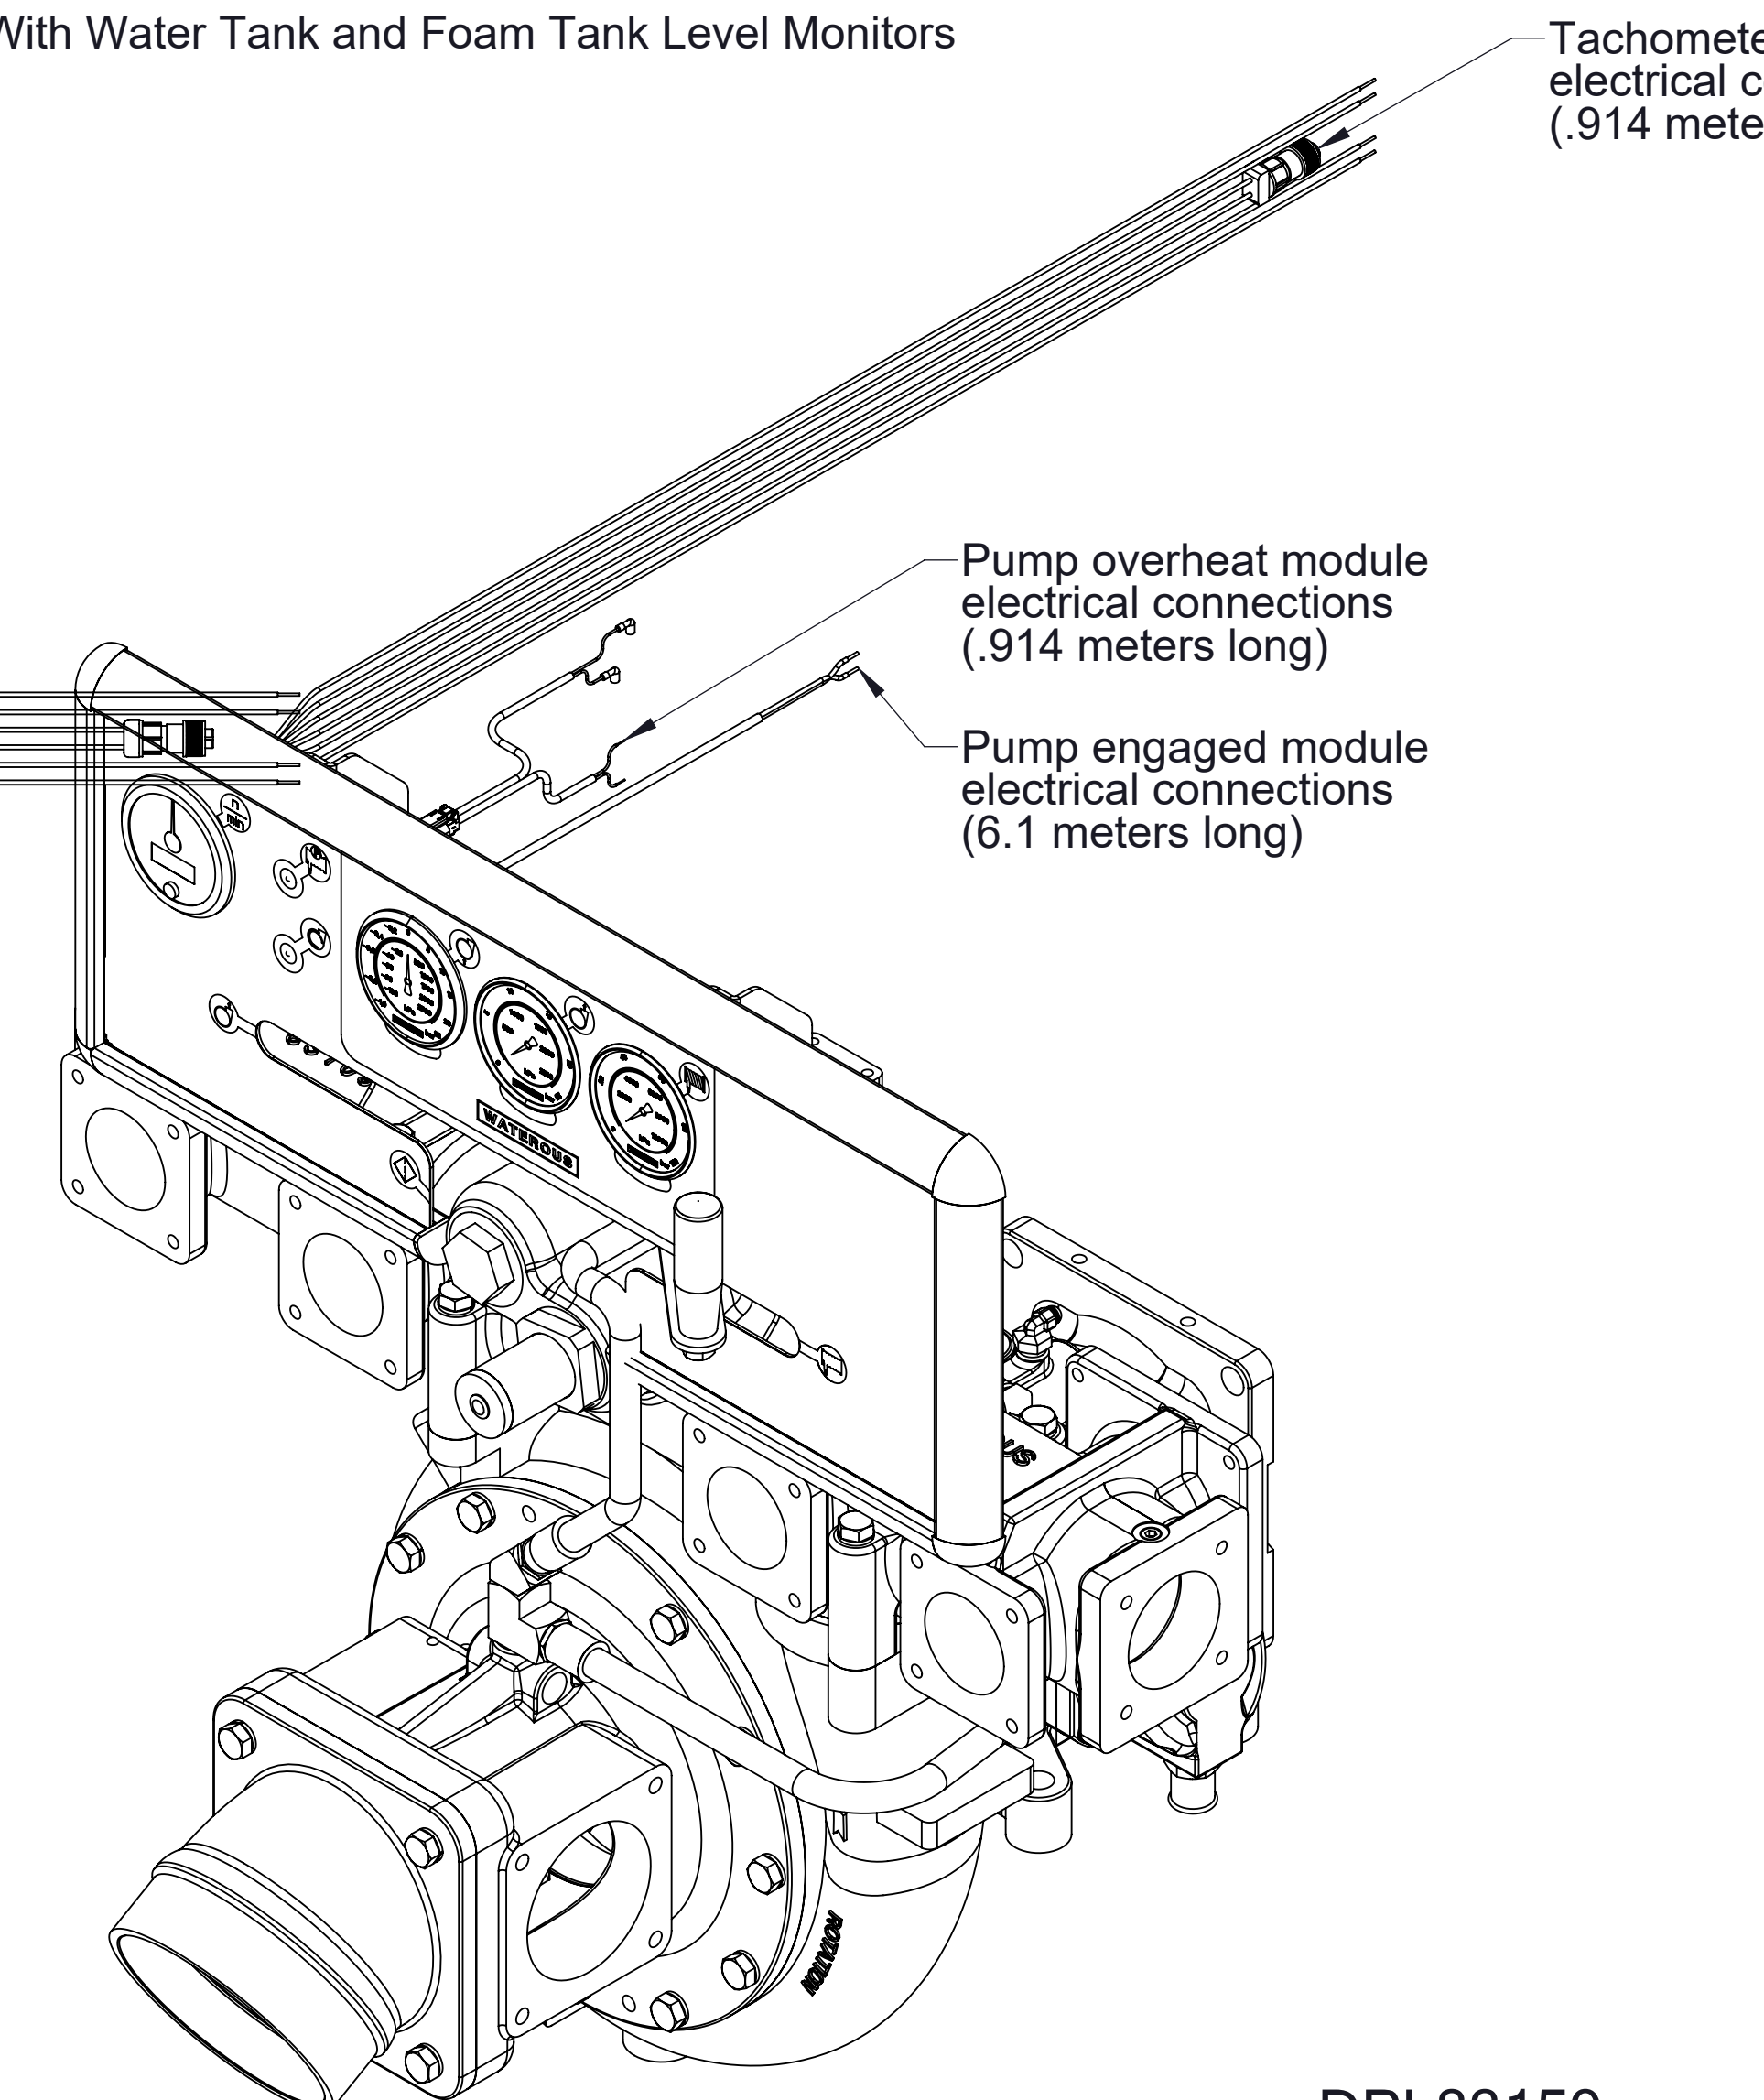

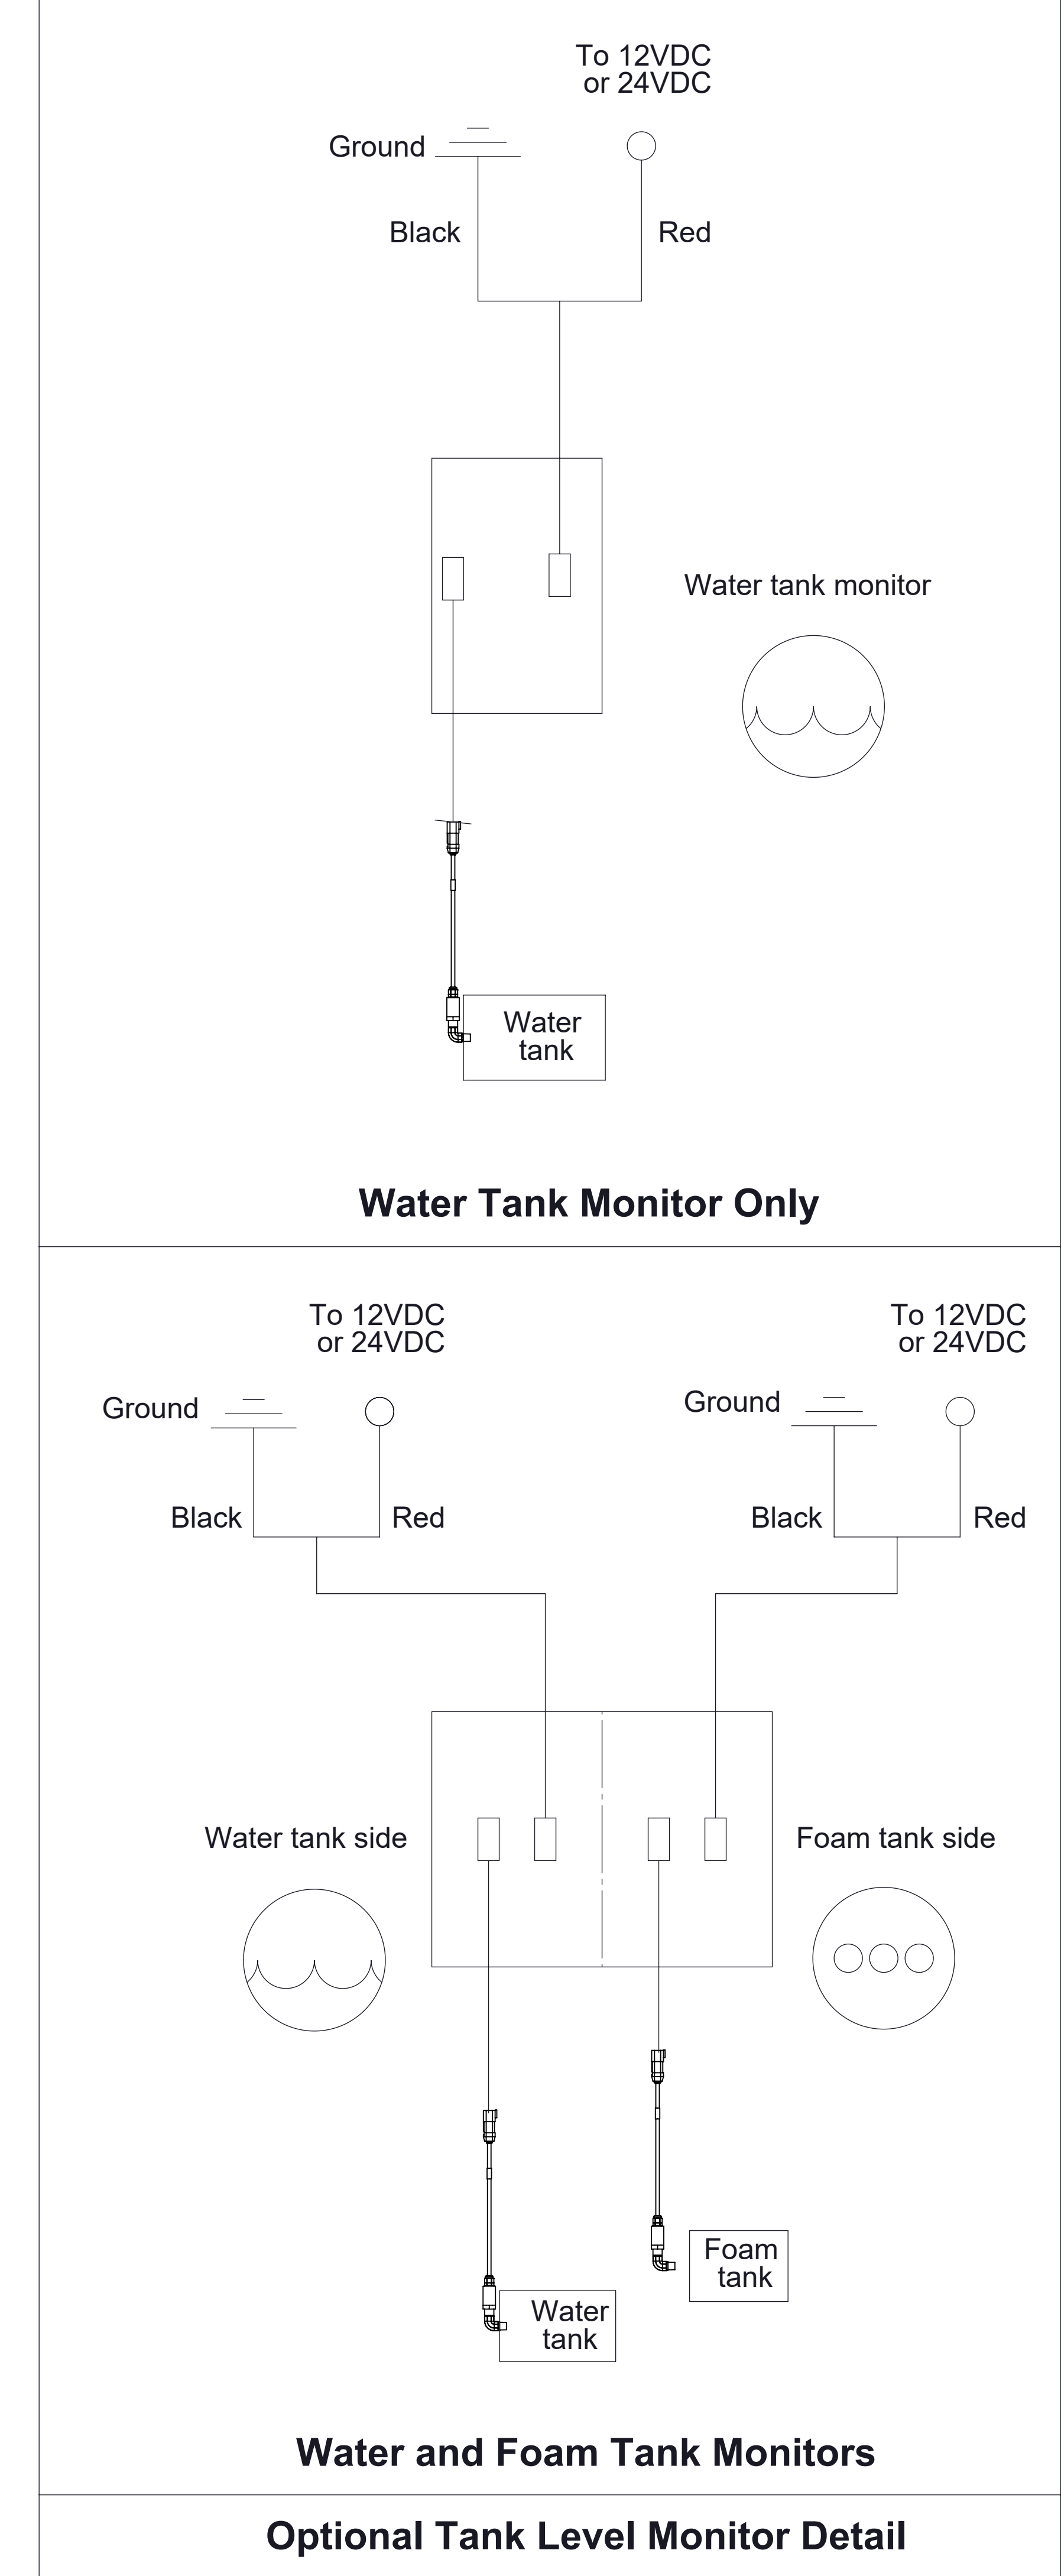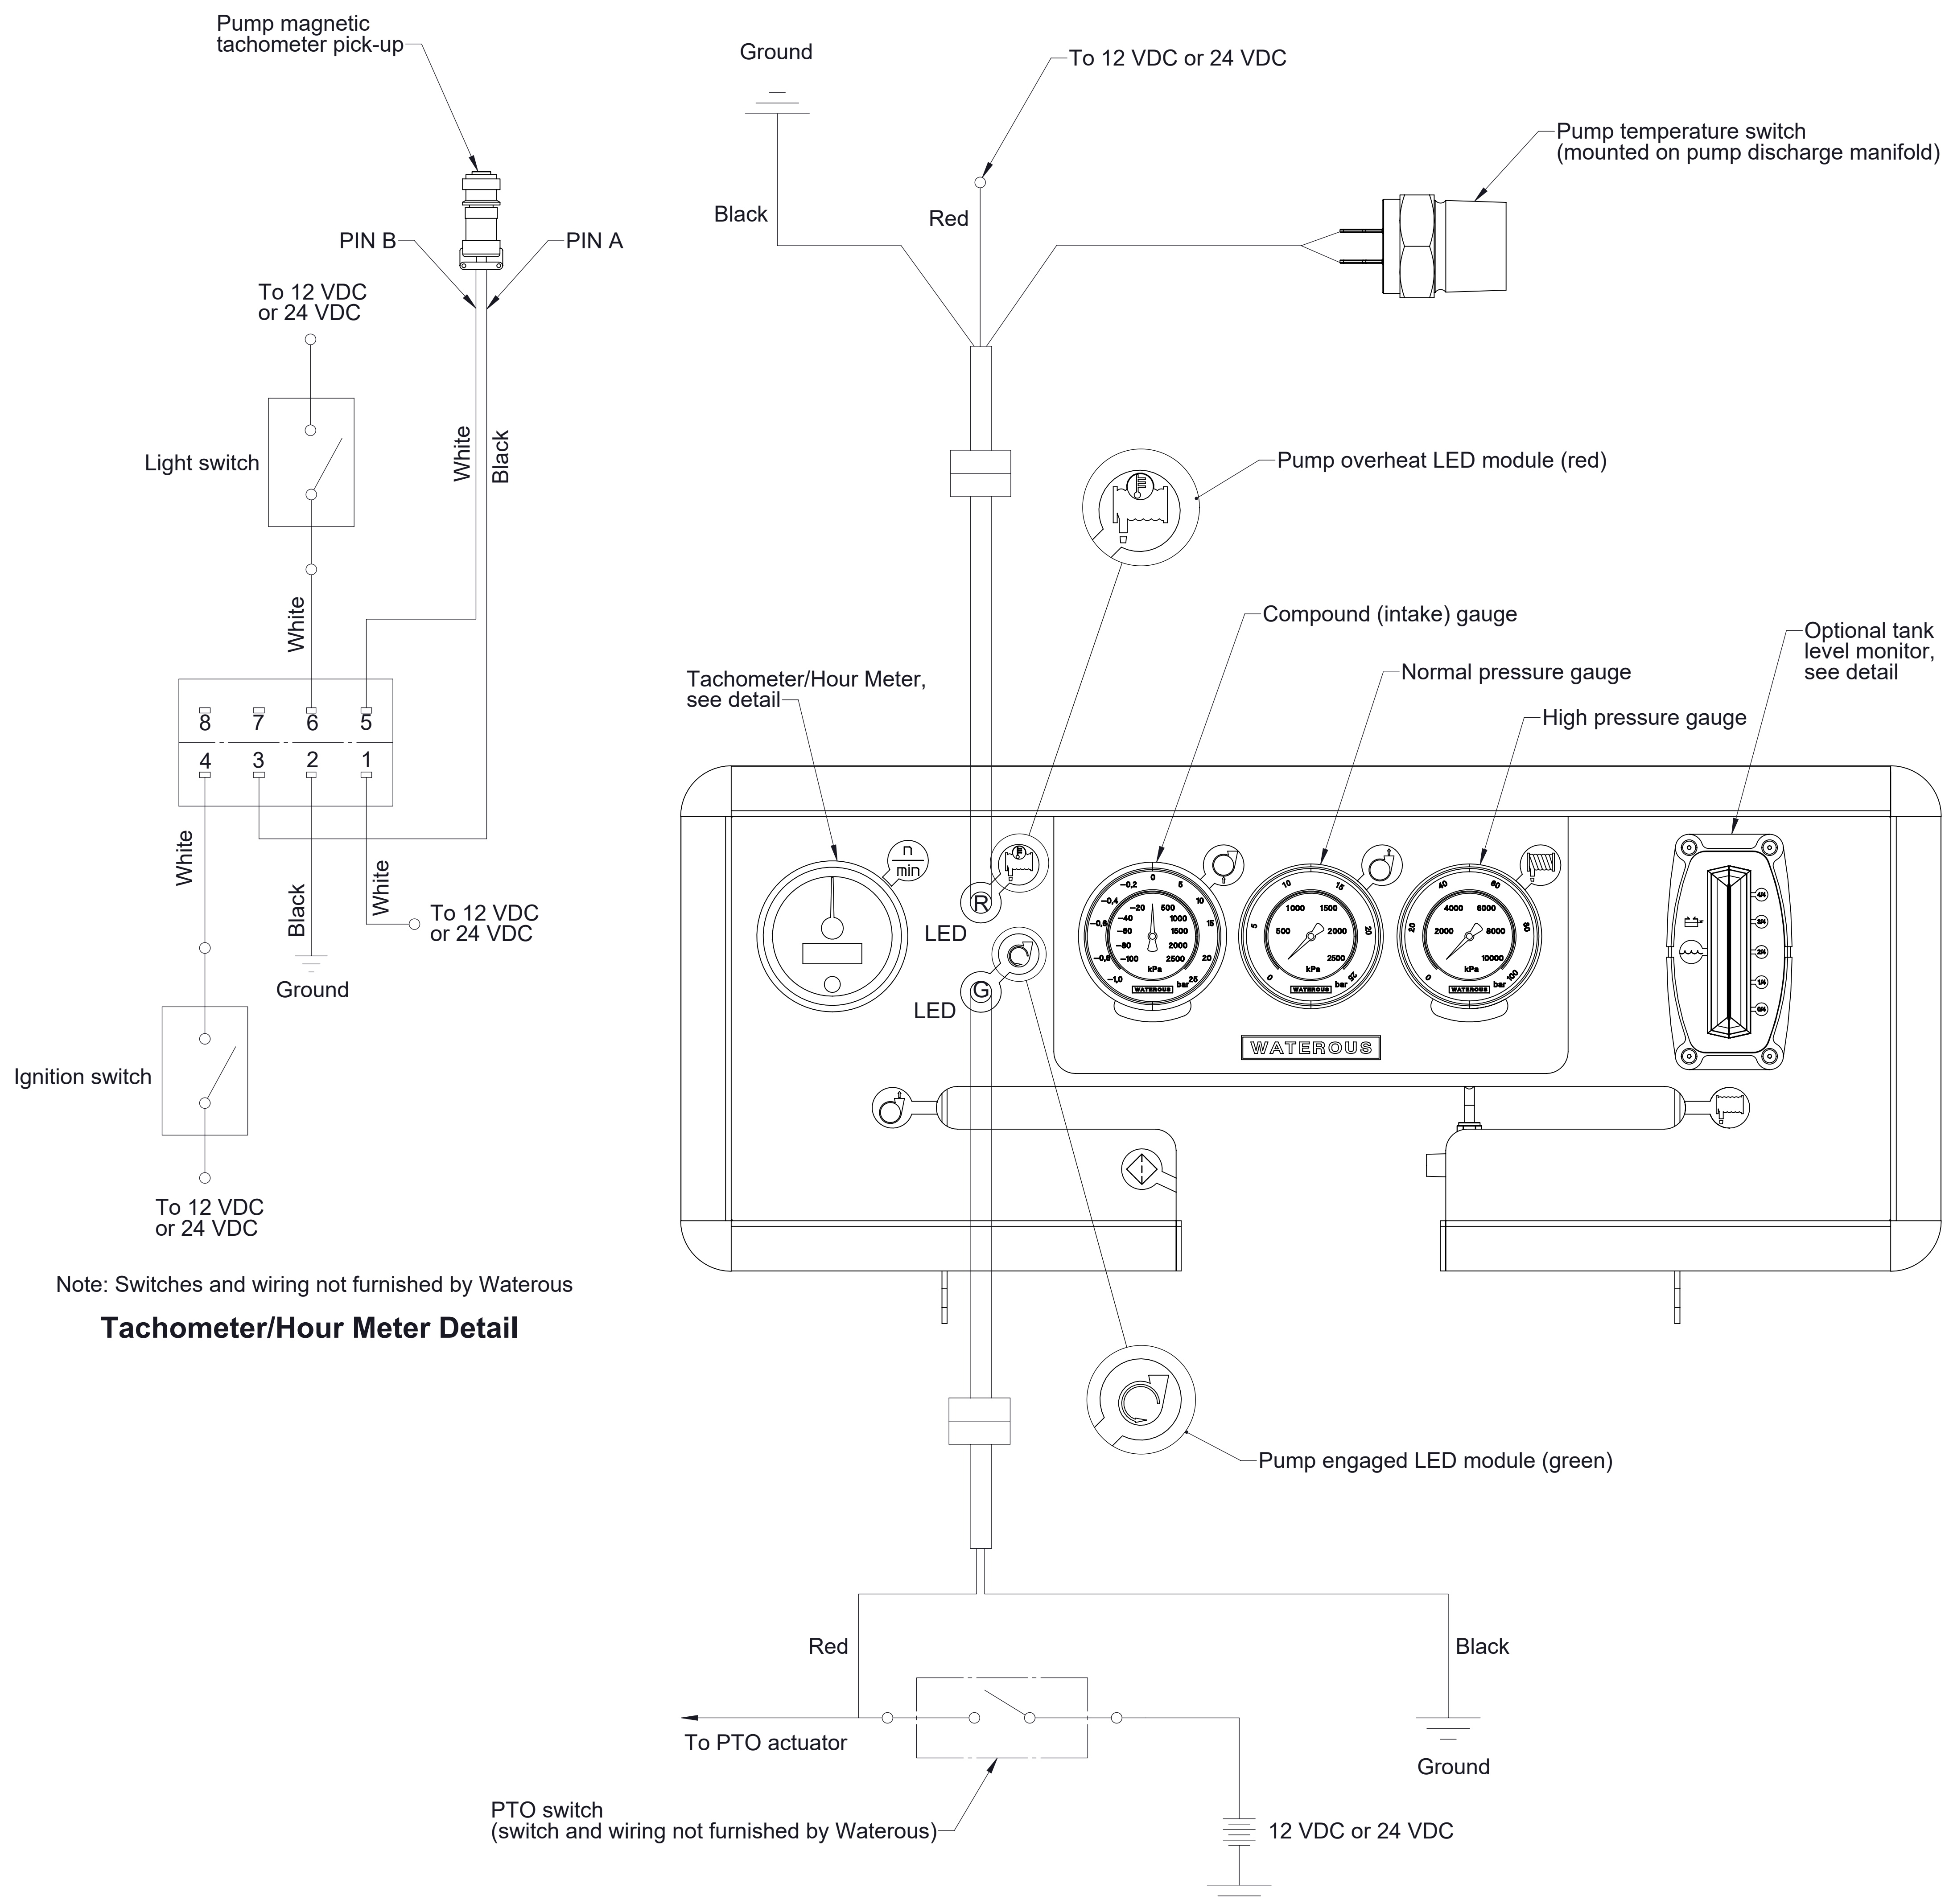


Optional Control Panel Wiring Schematic


Compound Gauge
Panel Cutout
Ø3.19in/81.03mm

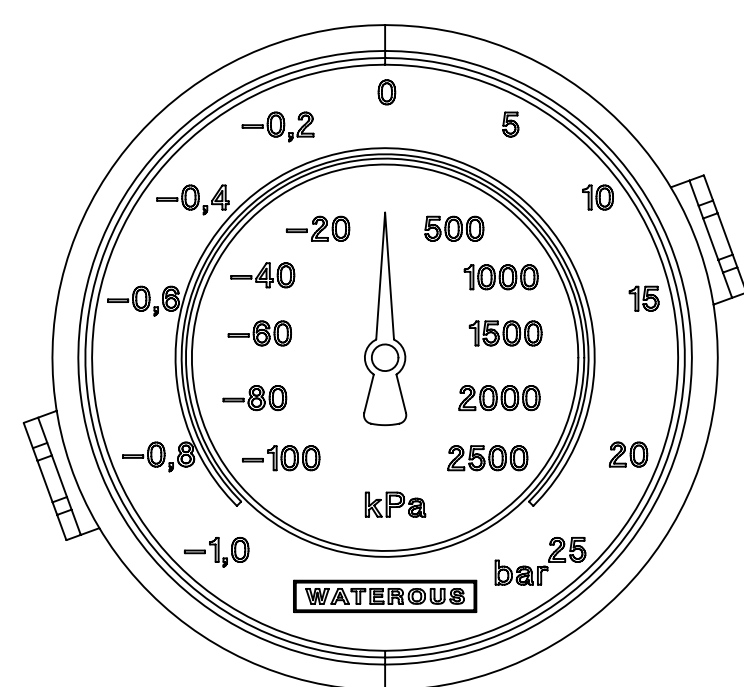


Tachometer/Hour Meter
Panel Cutout
Ø3.375in/85.73mm

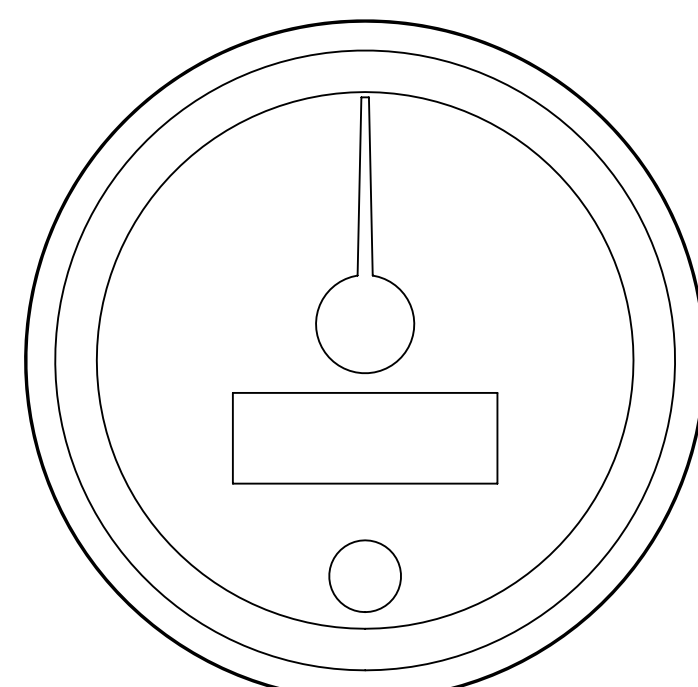


Normal Pressure Gauge
Panel Cutout
Ø3.19in/81.03mm

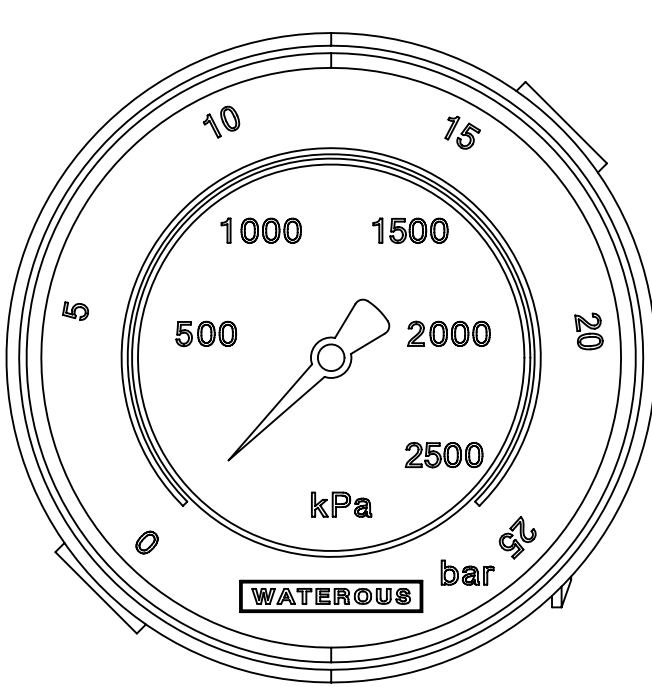


High Pressure Gauge
Panel Cutout
Ø3.19in/81.03mm

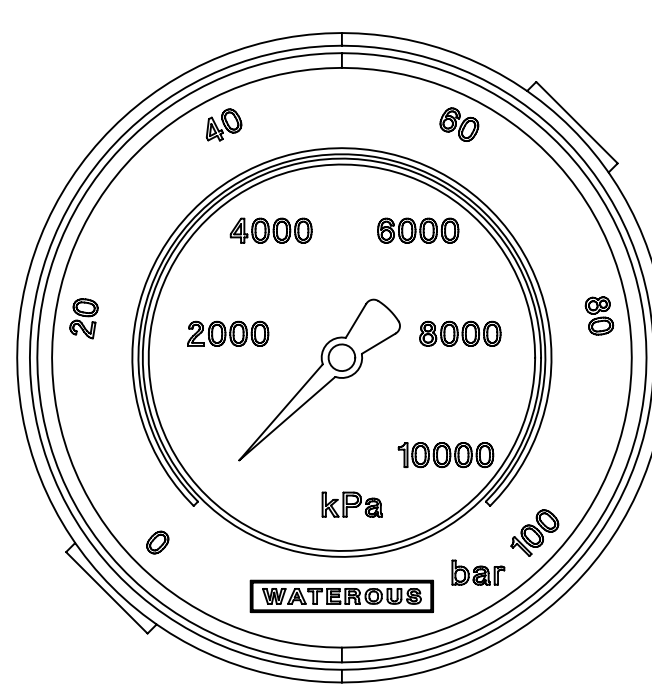


Pump Panel Instrument Package

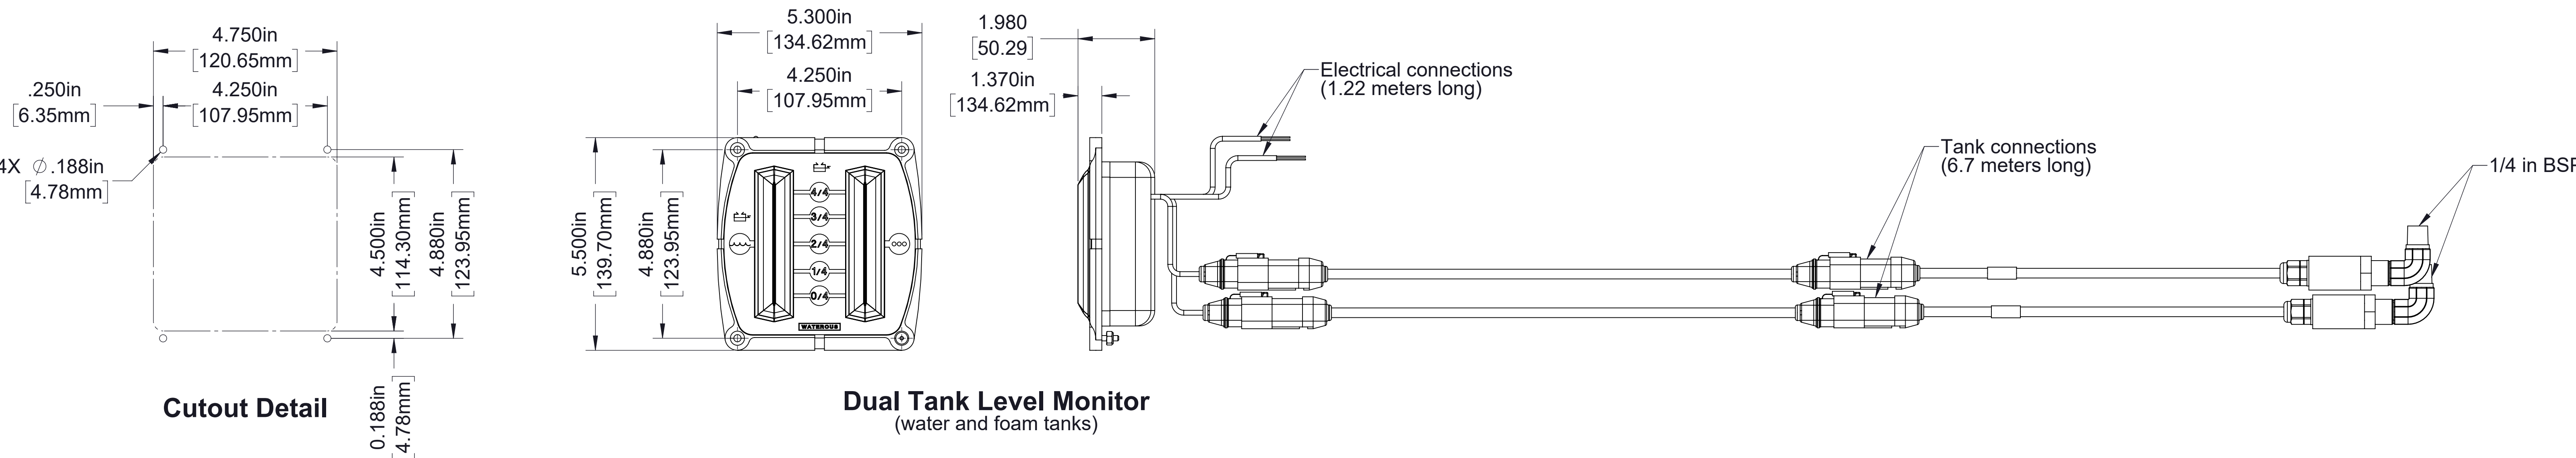


Cutout Detail

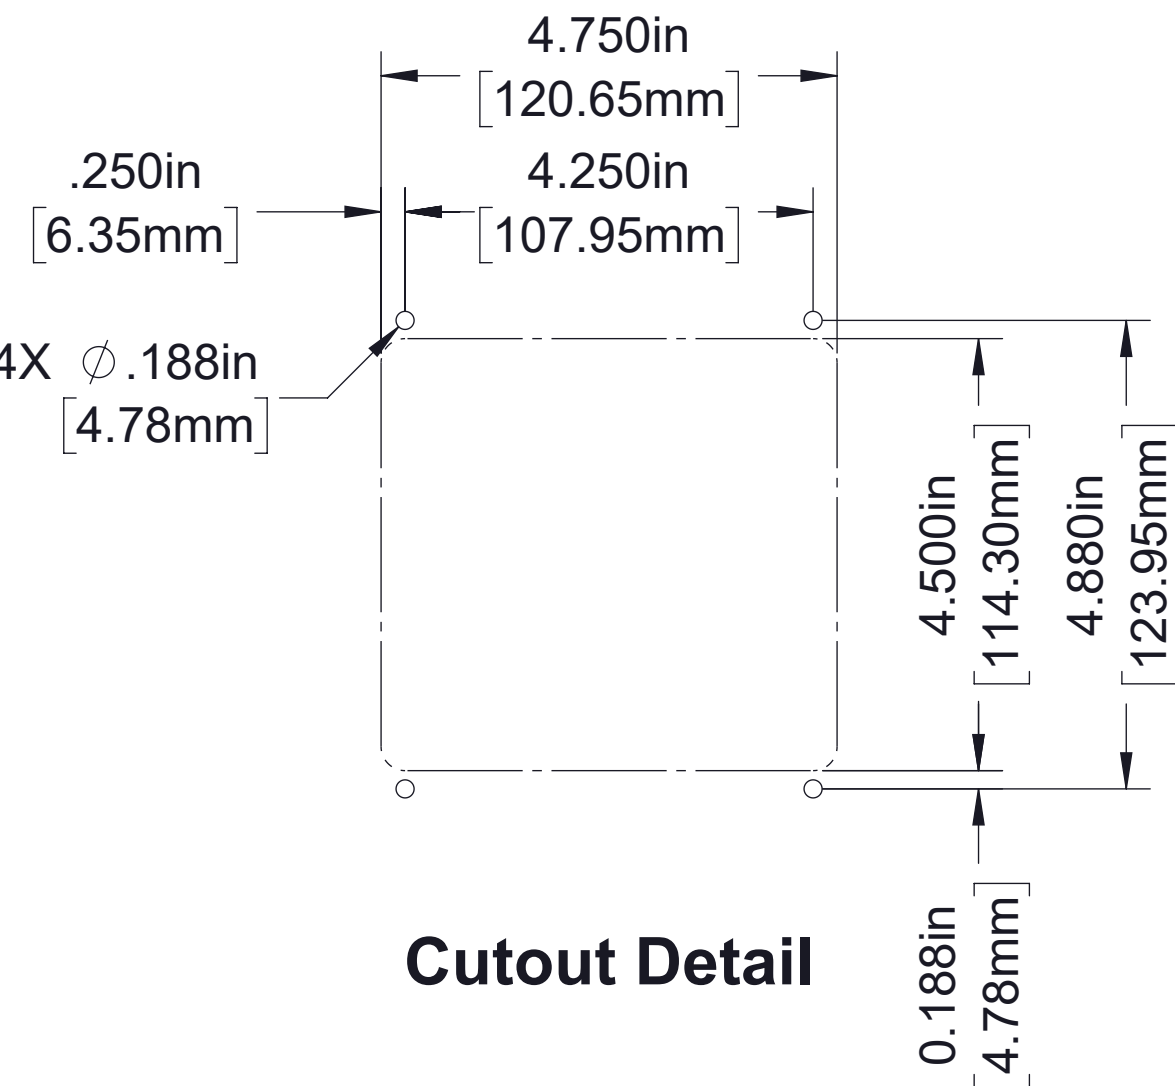

Dual Tank Level Monitor
(water and foam tanks)

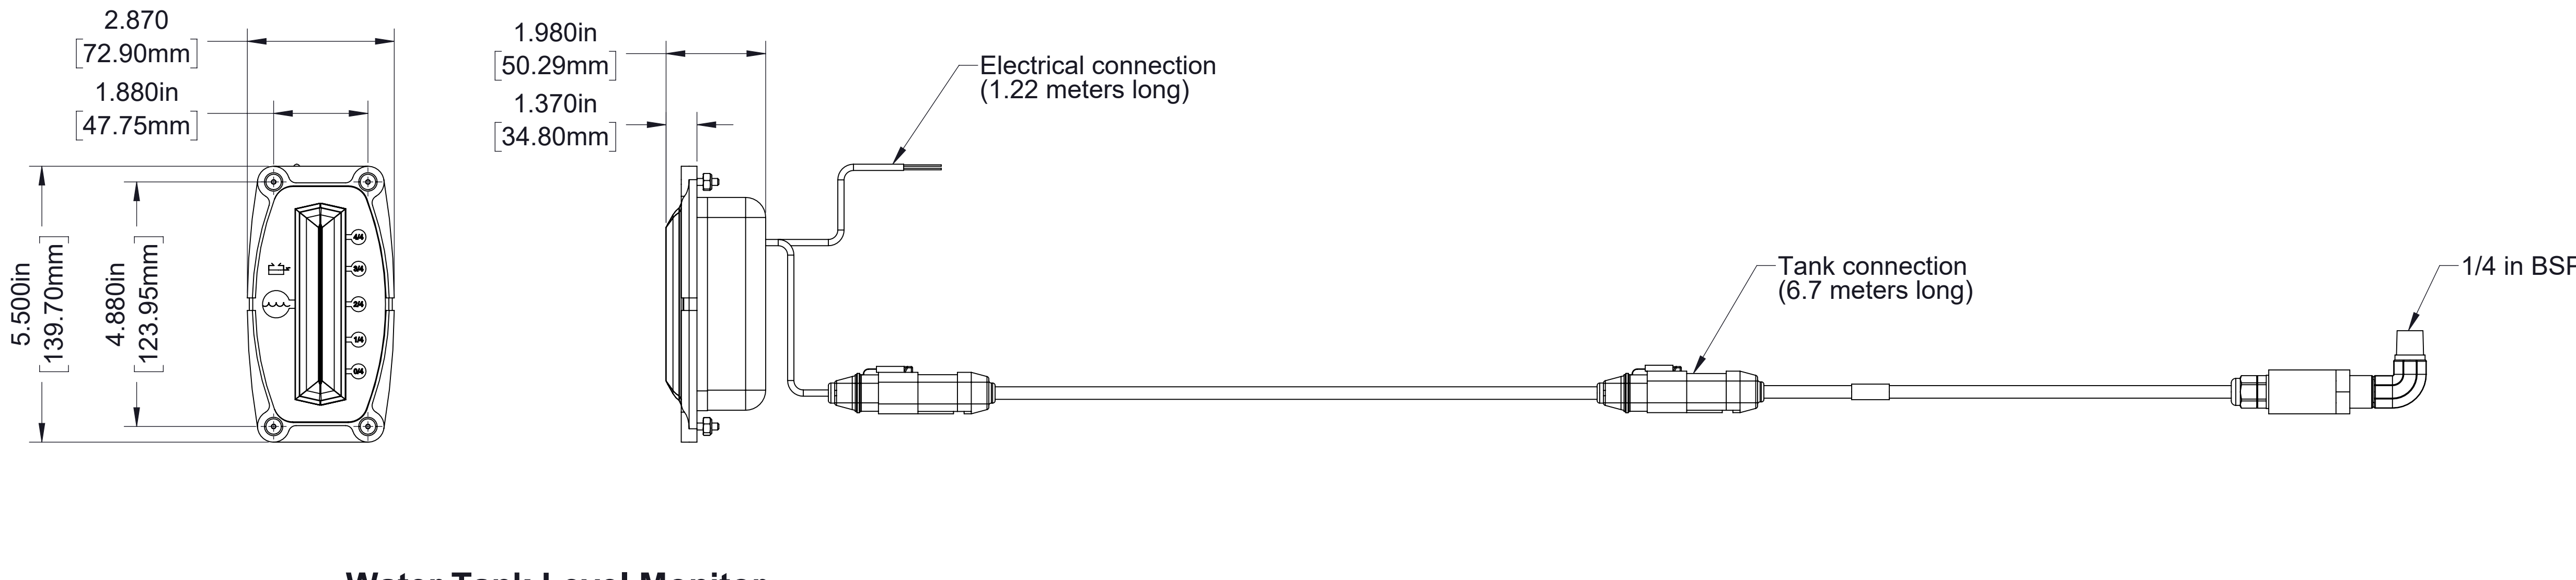

Cutout Detail

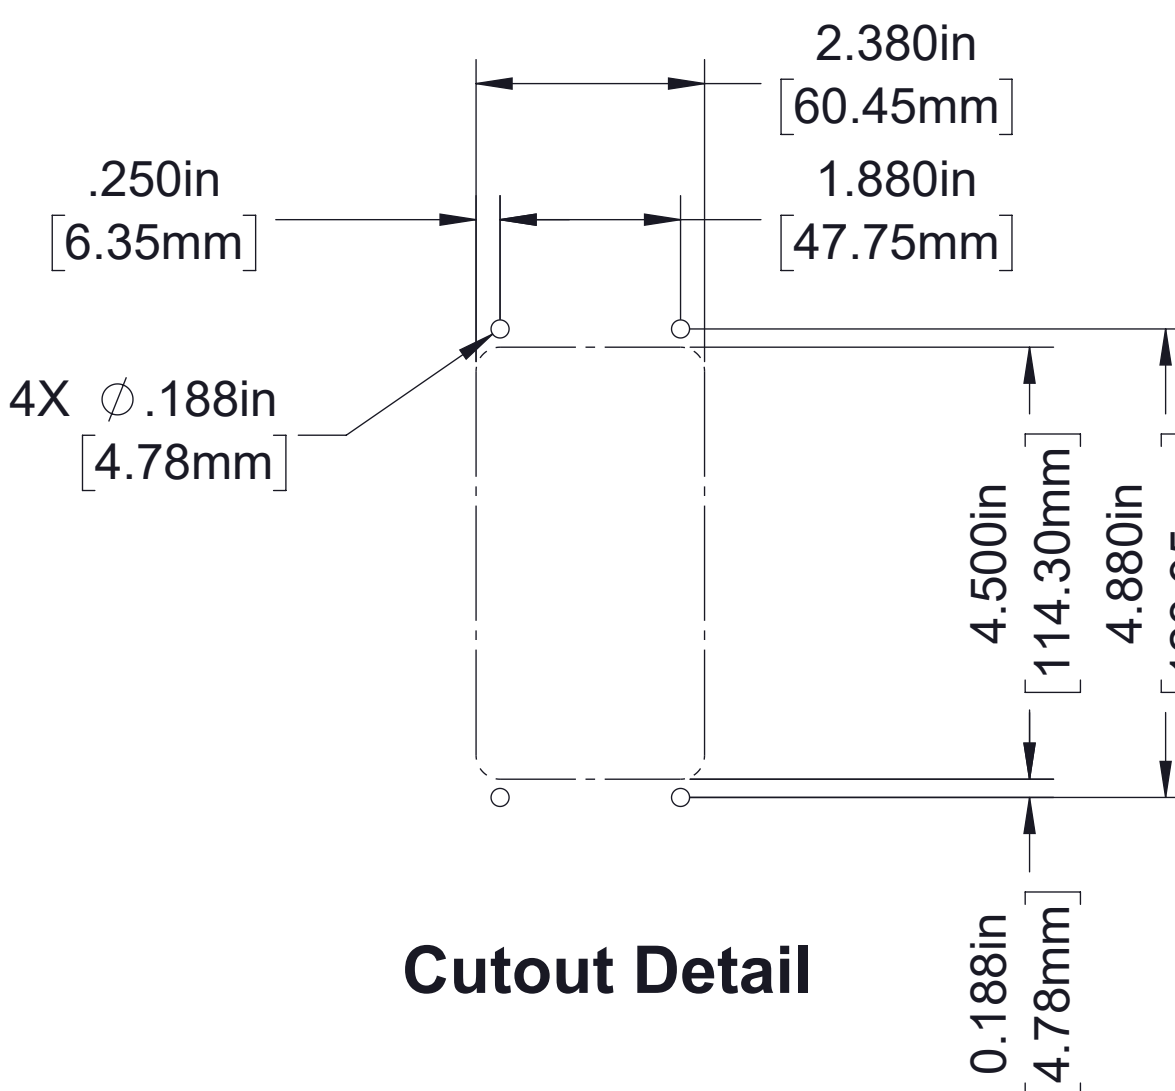

Water Tank Level Monitor

Optional Gauges and Monitors