

 Document Number
 Issue Date
 Rev. Date

 SPL82890
 02/13/06
 10/29/19

Model VPO and VPOS Priming Pump Service Parts List

Configuration as used with VAP Priming Valves

Index:


	Priming Pump		Pump Transmission or P.T.O. Model (Located on Serial Plate)				See Page						
	Mounting Location		Pump Transmission		P.T.O.			Priming Pump Compo- nents		Panel Switch and Wiring		Prime-Safe™ Lubricant	
Model			Series	Model	Series	Model	Mounting	Exploded View	Cross-Sec- tion View	Standard Push-But- ton Switch	Optional Oversize Push-But- ton Switch	Configuration when Used	Configuration when Not Used
				C20B C20C C20D C20E C20F	TC20	TC20B TC20C TC20D TC20E TC20F	2, 3 or 4, 5*						
			C21	C21	-	-		1				1	l
VPO	On Pump Transmission or P.T.O.		C10	C10B C10C C10D C10E C10F	TC10	TC10B TC10C TC10D TC10E TC10F	0.7	12, 13 14,	14, 15	16, 17	20, 21 or 22, 23	24, 25	24, 25
		Y		YB, YBX YC, YCX YD, YDX YE, YEX YF, YFX	TY	TYB, TYBX TYC, TYCX TYD, TYDX TYE, TYEX TYF, TYFX	6, 7						
			QC	QC	-	-	8, 9						
			w	WB WBX	-	-	10, 11						
	Separately Mounted	Single Pump		Α	All		-						
VPOS	(Not on Transmis- sion or P.T.O.)	Dual Pumps		А	All		-	12, 13	14, 15	18, 19	-	24, 25	24, 25

^{*}Note: Pages 4 and 5 apply to TC20 Series PTO's with Eclipse ES™ only.

Mounting on C20 and C21Series Transmissions and TC20 and TC21Series P.T.O.'s

REF. NO.	DESCRIPTION	
K12	Primer Sub-assembly	
K13	Mounting Bracket	
K16	Lock Washer, 3/8 in.	

REF. NO.	DESCRIPTION		
K17	Socket Hd Screw, 5/16-18 x 1 in.		
K18	Lock Washer 5/16 in.		
K28	Cable Extension		
K34	Hex Hd Screw, 3/8-16 x 1 in.		

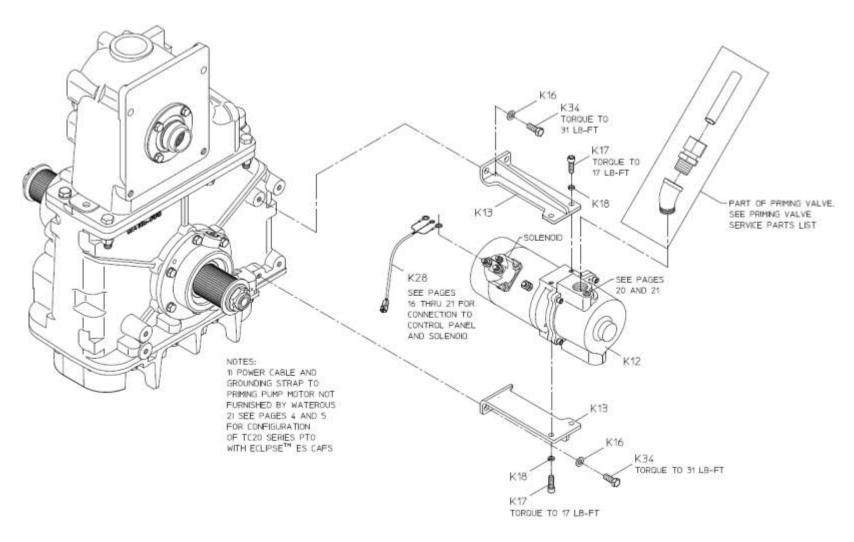


MODEL VPO MOUNTING ON
C20 AND C21 SERIES TRANSMISSIONS
AND TC20 AND TC21 SERIES PTO'S

Mounting on TC20 Series P.T.O.'s with Eclipse ES CAFS

REF. NO.	DESCRIPTION	
K12	Primer Sub-assembly	
K13	Mounting Bracket	
K15	Hex Hd Screw, 3/8-16 x 1-1/4 in.	
K16	Lock Washer, 3/8 in.	

REF. NO.	DESCRIPTION		
K17	Socket Hd Screw, 5/16-18 x 1 in.		
K18	Lock Washer 5/16 in.		
K28	Cable Extension		
K35	Bottom Mounting Bracket Spacer		

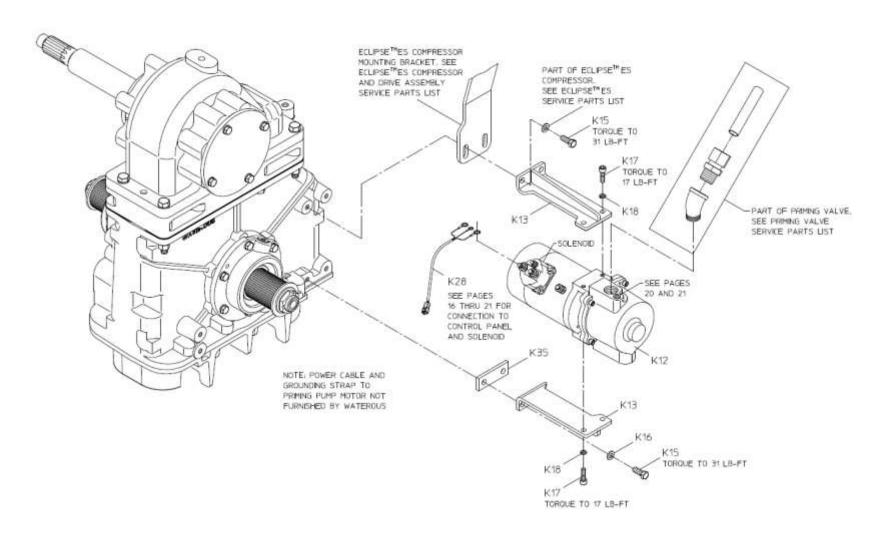


MODEL VPO MOUNTING ON
TC20 SERIES PTO WITH ECLIPSE™ES CAFS

Mounting on Y, C10 Series Transmissions and TY, TC10 Series P.T.O.'s

REF. NO.	DESCRIPTION		
K12	Primer Sub-assembly		
K13	Mounting Bracket		
K14	Bottom Mounting Bracket		
K15	Hex Hd Screw Y and TY Series: 3/8-16 x 1-1/4 in. C10 and TC10 Series: M10 x 30mm (Prior to June 25, 2002) M10 x 20mm (After June 25, 2002)		


REF. NO.	DESCRIPTION		
K16	Lock Washer, 3/8 in.		
K16	Lock Washer, M10		
K17	Socket Hd Screw, 5/16-18 x 1 in.		
K18	Lock Washer 5/16 in.		
K28	Cable Extension		

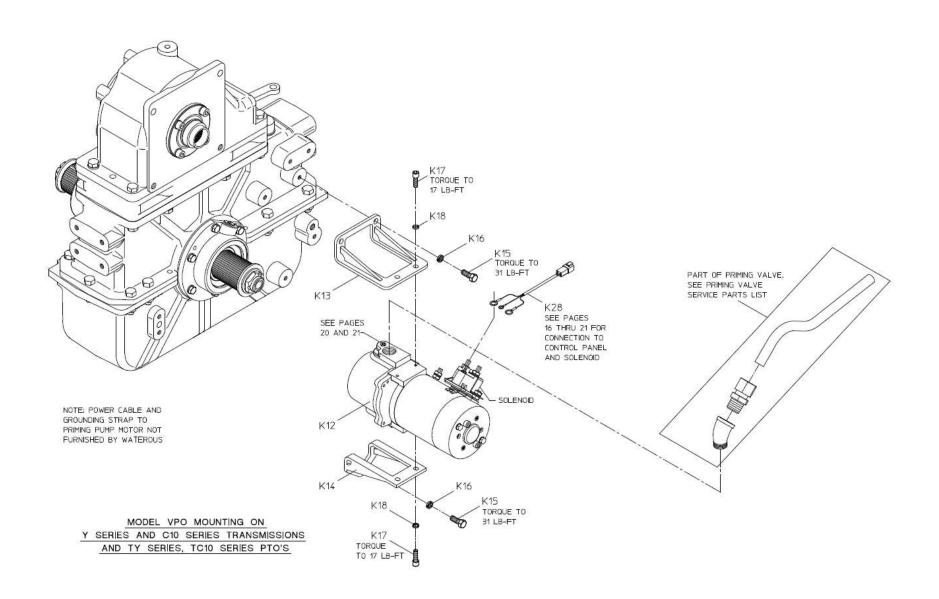

Mounting on QC Series Transmission

REF. NO.	DESCRIPTION
K12	Primer Sub-assembly
K15	Hex Hd Screw 3/8-16 x 1-1/4 in.
K16	Lock Washer, 3/8 in.
K17	Socket Hd Screw, 5/16-18 x 1 in.
K18	Lock Washer 5/16 in.
K 28	Cable Extension


REF. NO.	DESCRIPTION		
K34	Hex Hd Screw, 3/8-16 x 1 in.		
K36	Lower Primer Bracket		
K37	Upper Primer Bracket		
K38	3/4 NPT x 3/4 Tubing Fitting		

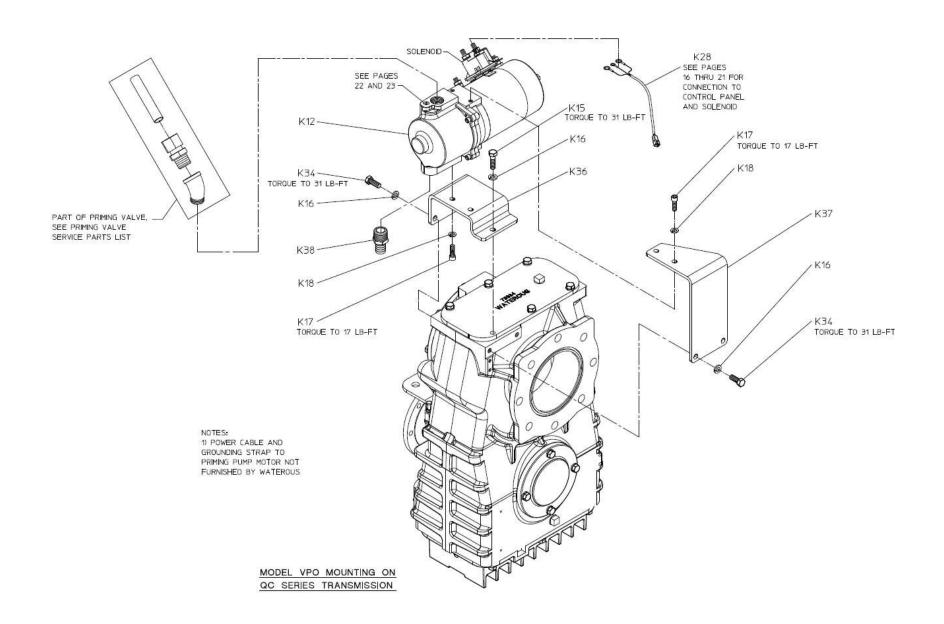

Mounting on W Series Transmissions

REF. NO.	DESCRIPTION	
K12	Primer Sub-assembly	
K13	Mounting Bracket	
K14	Bottom Mounting Bracket	
K15	Hex Hd Screw, 3/8-16 x 1-1/4 in.	

REF. NO.	DESCRIPTION		
K16	Lock Washer, 3/8 in.		
K17	Socket Hd Screw, 5/16-18 x 1 in.		
K18	Lock Washer 5/16 in.		
K28	Cable Extension		

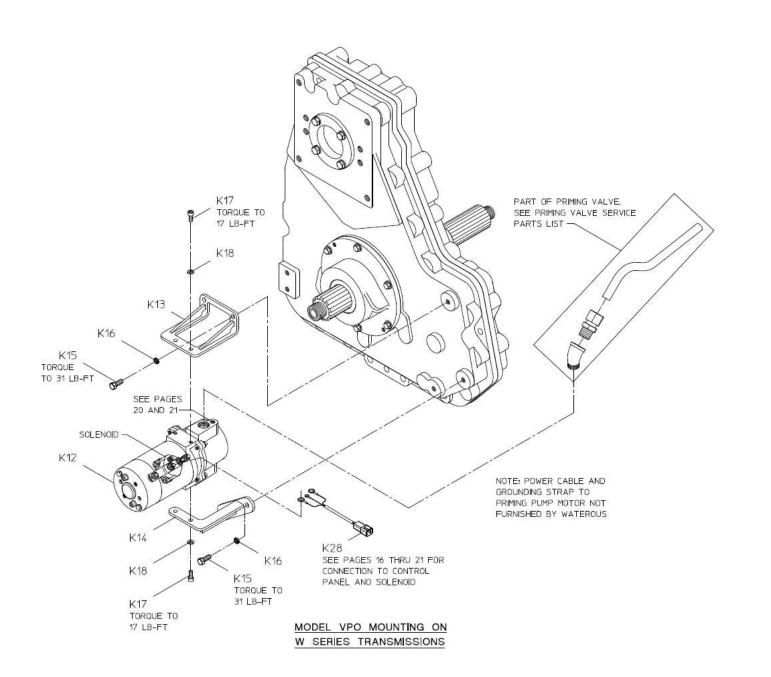


Priming Pump Components

Models VPO and VPOS (Exploded View)

REF. NO.	DESCRIPTION		
K1	Vane		
K2	Oilite Bearing		
K3	Rotor Assembly (Includes Shaft)		
K4	Adapter Assembly, (Includes K2, K6 and K8)		
K5	Motor Assembly (Includes K2, K4, K6, K8, K23 and (2) 1/4-20 x 6-1/2 in. Hex Hd Mounting Screws)		
K6	O-ring, .612 x .818 in.		
K7	O-ring, 3.859 x 4.137 in.		
K8	Dowel Pin, 3/15 x 3/4 in.		

REF. NO.	DESCRIPTION
K10	Housing Assembly (Includes K2)
K12	Primer Sub-assembly
K19	Repair Kit
K21	Socket Hd Screw, 1/4-20 x 1 in.
K22	Lock Washer, 1/4 in.
K23	Solenoid
K24	Wire Clamp

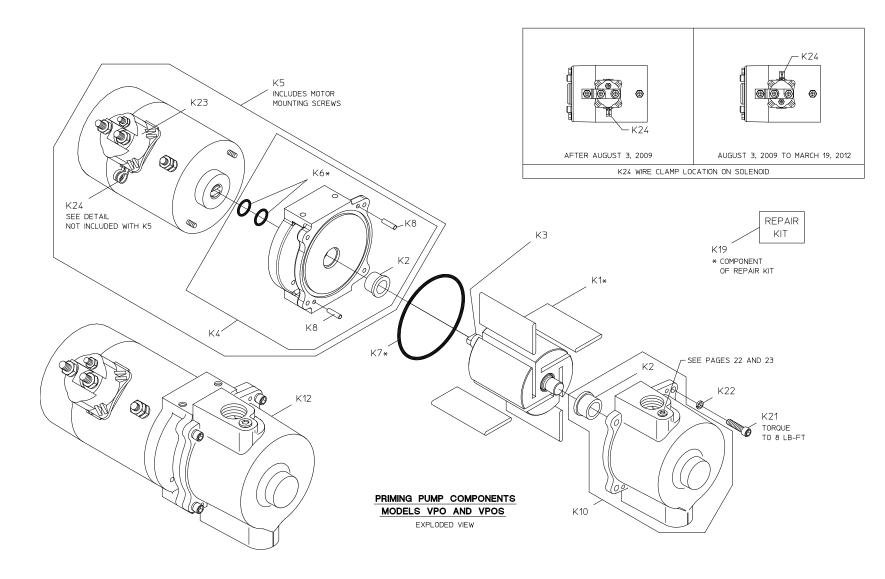


Priming Pump Components

Models VPO and VPOS (Cross-Section View)

REF. NO.	DESCRIPTION
K1	Vane
K2	Oilite Bearing
K3	Rotor Assembly (Includes Shaft)
K4	Adapter Assembly, (Includes K2, K6 and K8)
K5	Motor Assembly (Includes K2, K4, K6, K8, K23 and(2) 1/4-20 x 6-1/2 in. Hex Hd Mounting Screws)
K6	O-ring, .612 x .818 in.
K7	O-ring, 3.859 x 4.137 in.
K8	Dowel Pin, 3/15 x 3/4 in.

REF. NO.	DESCRIPTION
K10	Housing Assembly (Includes K2)
K21	Socket Hd Screw, 1/4-20 x 1 in.
K22	Lock Washer, 1/4 in.
K23	Solenoid
K24	Wire Clamp

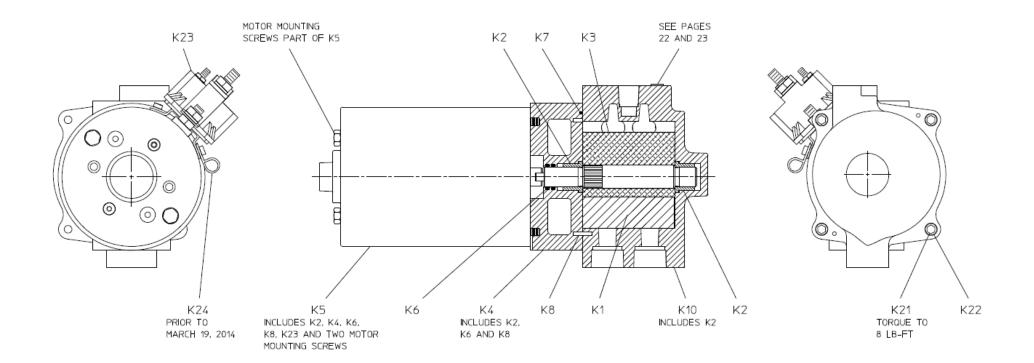

PRIMING PUMP COMPONENTS

MODELS VPO AND VPOS


CROSS-SECTION VIEW


Panel Switch and Wiring

Single Primer Push-Button Switch

REF. NO.	DESCRIPTION
K20	Control Panel with Integral Switch (Includes K29 Mounting Screw and Nuts)
K28	Cable Extension

REF. NO.	DESCRIPTION
K29	Flat Hd Screw, 6-32 x 3/4 in. and 6-32 Hex Nut (For Control Panel)

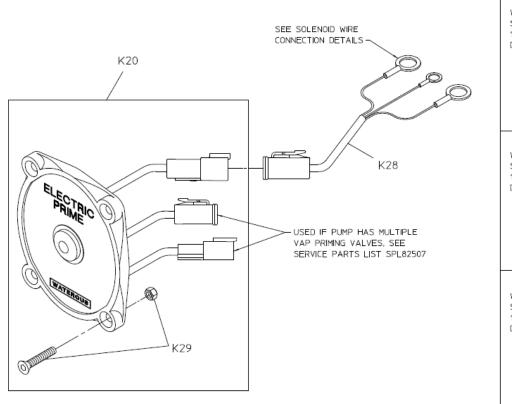

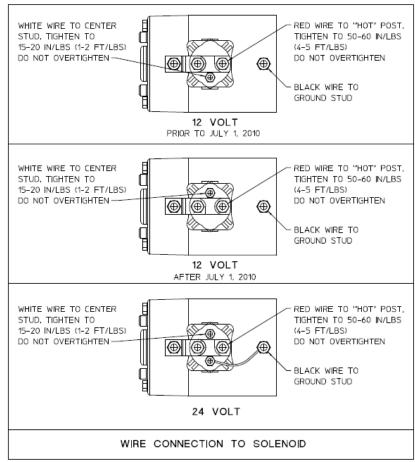

PANEL SWITCH AND WIRING SINGLE PRIMER


STANDARD PUSH-BUTTON SWITCH

Panel Switch and Wiring

Dual Primer Push-Button Switch

REF. NO.	DESCRIPTION
K20	Control Panel with Integral Switch (Includes K29 Mounting)
K28	Cable Extension


REF. NO.	DESCRIPTION
K29	Flat Hd Screw, 6-32 x 3/4 in. and 6-32 Hex Nut (For Control Panel)
K40	Jumper Wire

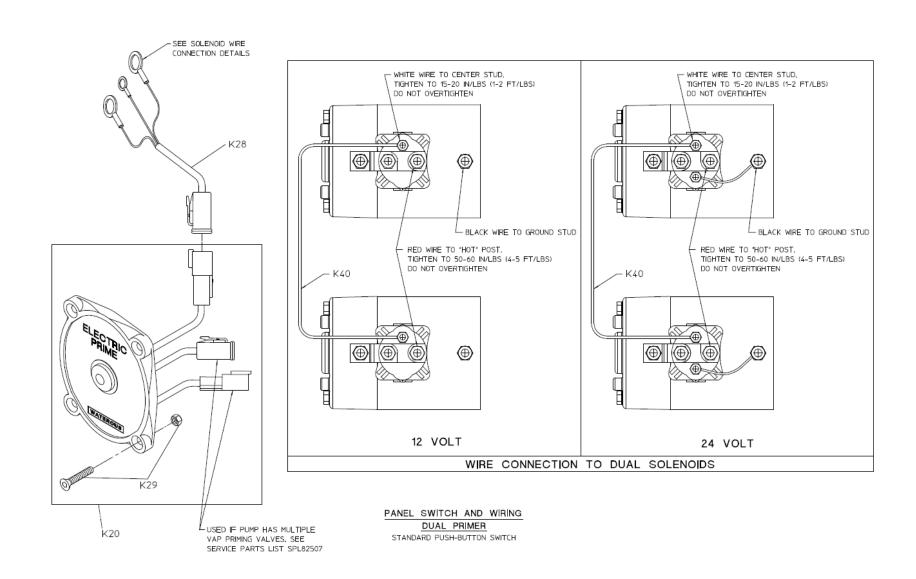

Panel Switch and Wiring Optional Oversize Push-Button Switch

REF. NO.	DESCRIPTION
K 28	Cable Extension
K29	Flat Hd Screw, 6-32 x 3/4 in. and 6-32 Hex Nut (For Control Panel)

REF. NO.	DESCRIPTION
K30	Control Panel with Integral Switch (Includes K29 Mounting Screws and Nuts)

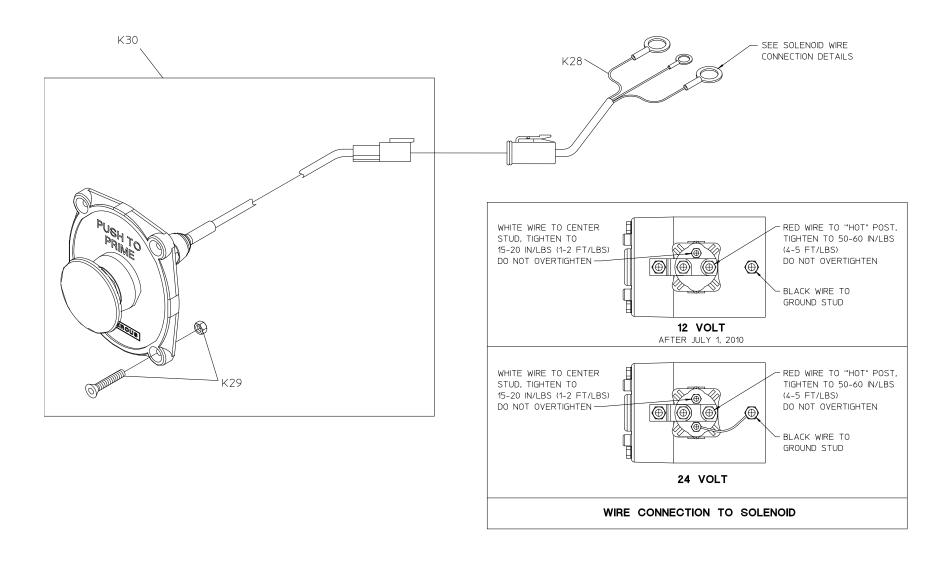

PANEL SWITCH AND WIRING SINGLE PRIMER


OPTIONAL OVERSIZED PUSH-BUTTON SWITCH
AFTER JUNE 19, 2015


Panel Switch and Wiring


Optional Oversize Push Button Switch – (September 6, 2011 to June 19, 2015)

REF. NO.	DESCRIPTION
K29	Flat Hd Screw, 6-32 x 3/4 in. and 6-32 Hex Nut (For Control Panel)
K30	Switch Assembly
K31	Control Panel (Includes K29 Mounting Screws and Nuts)

REF. NO.	DESCRIPTION
K32	Switch Wire
K33	PVC Washer, 5/8 in.

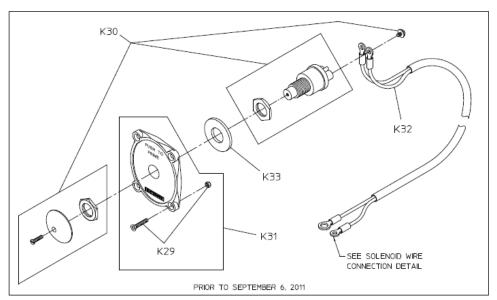

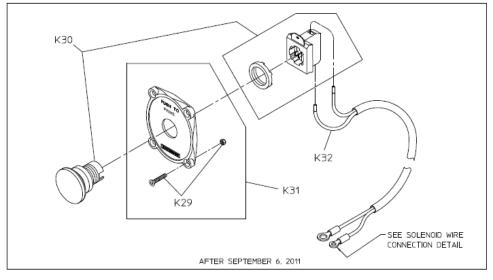

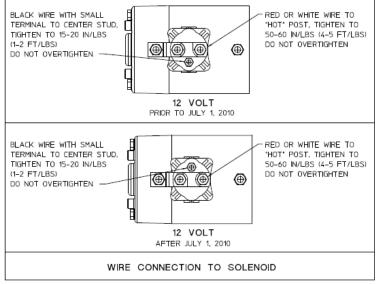


PANEL SWITCH AND WIRING
OPTIONAL OVERSIZED PUSH-BUTTON SWITCH

Prime-Safe™ Lubricant

REF. NO.	DESCRIPTION
K9	Headless Pipe Plug, 1/8 NPT
K25	Check Valve, 1/8 NPT

REF. NO.	DESCRIPTION
K26	Compression Fitting, 1/8 in.
K27	Prime-Safe™ Decal

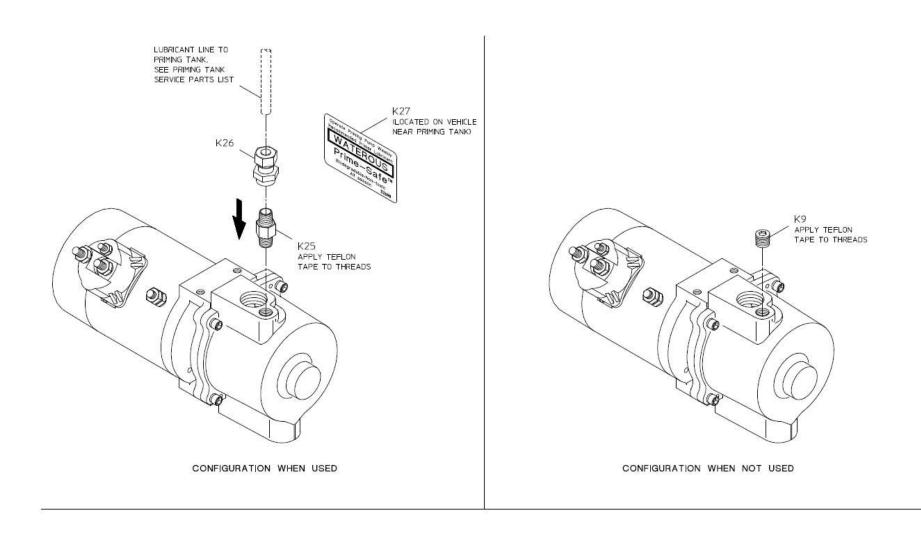

PRIME-SAFETM LUBRICANT